

# Robot Mapping

## Introduction to Robot Mapping

Cyrill Stachniss



# What is Robot Mapping?

- **Robot** – a device, that moves through the environment
- **Mapping** – modeling the environment

# Related Terms

State  
Estimation

Localization

Mapping

SLAM

Navigation


Motion  
Planning

# What is SLAM?

- Computing the robot's pose and the map of the environment at the same time
- **Localization:** estimating the robot's location
- **Mapping:** building a map
- **SLAM:** building a map and locating the robot simultaneously


# Localization Example

- Estimate the robot's poses given landmarks

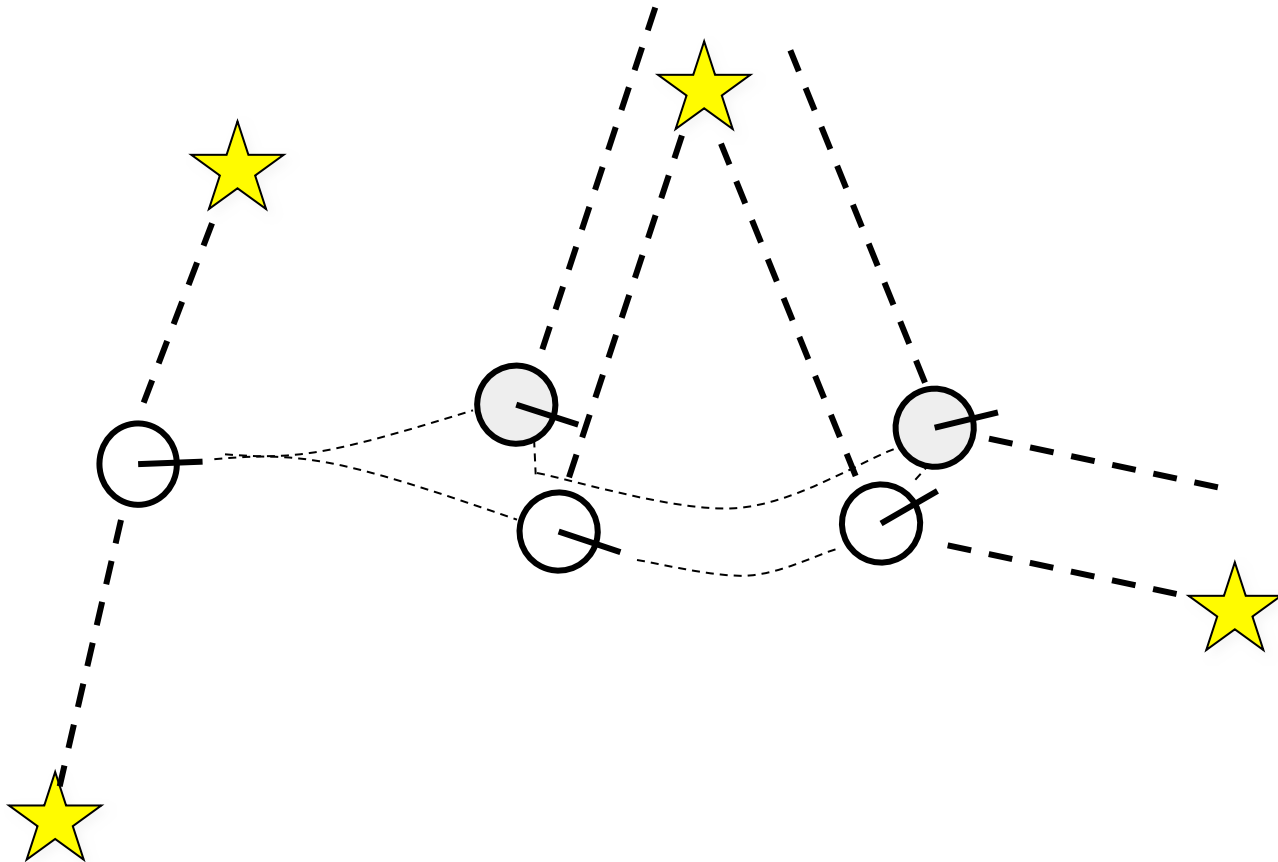


# Mapping Example

- Estimate the landmarks given the robot's poses

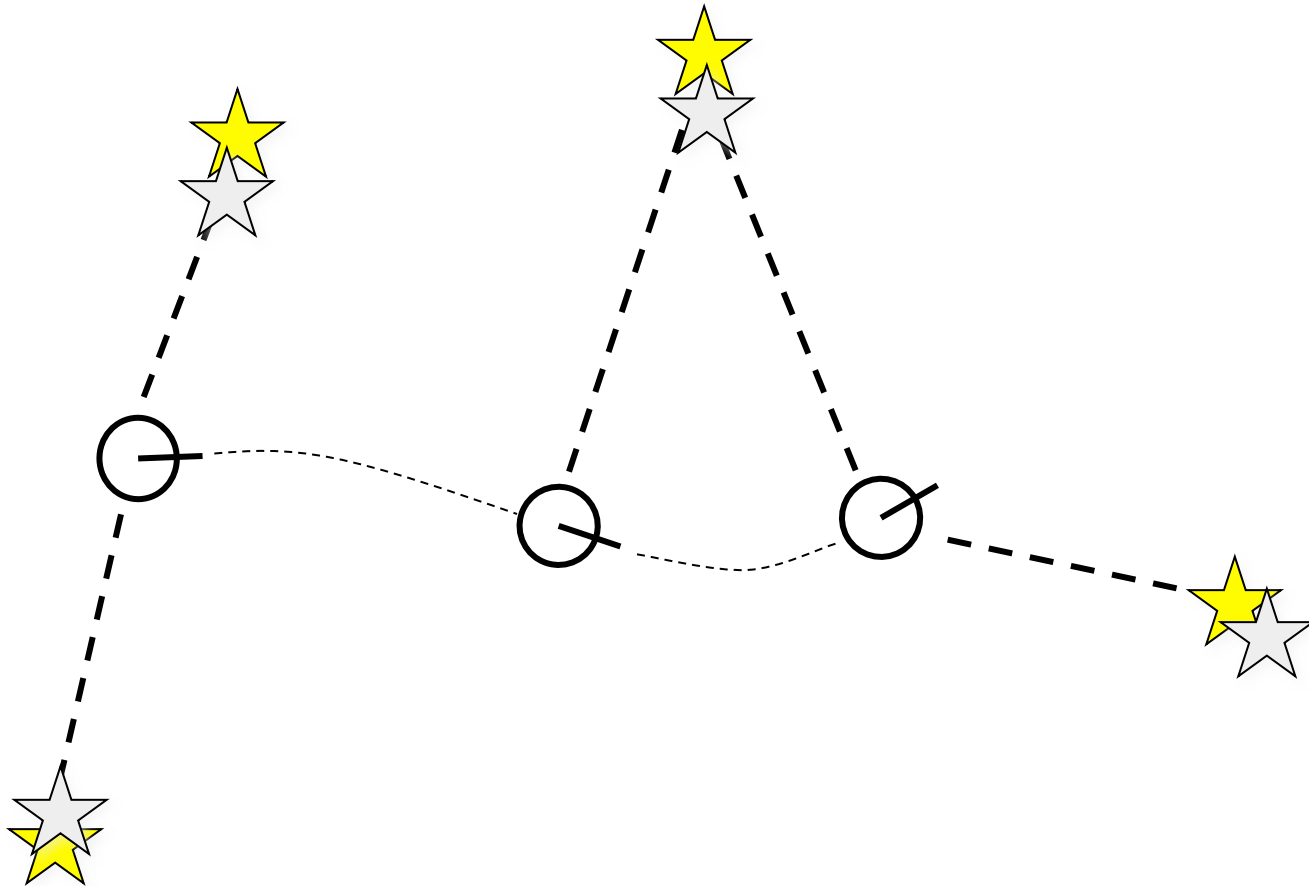

# SLAM Example

- Estimate the robot's poses and the landmarks at the same time

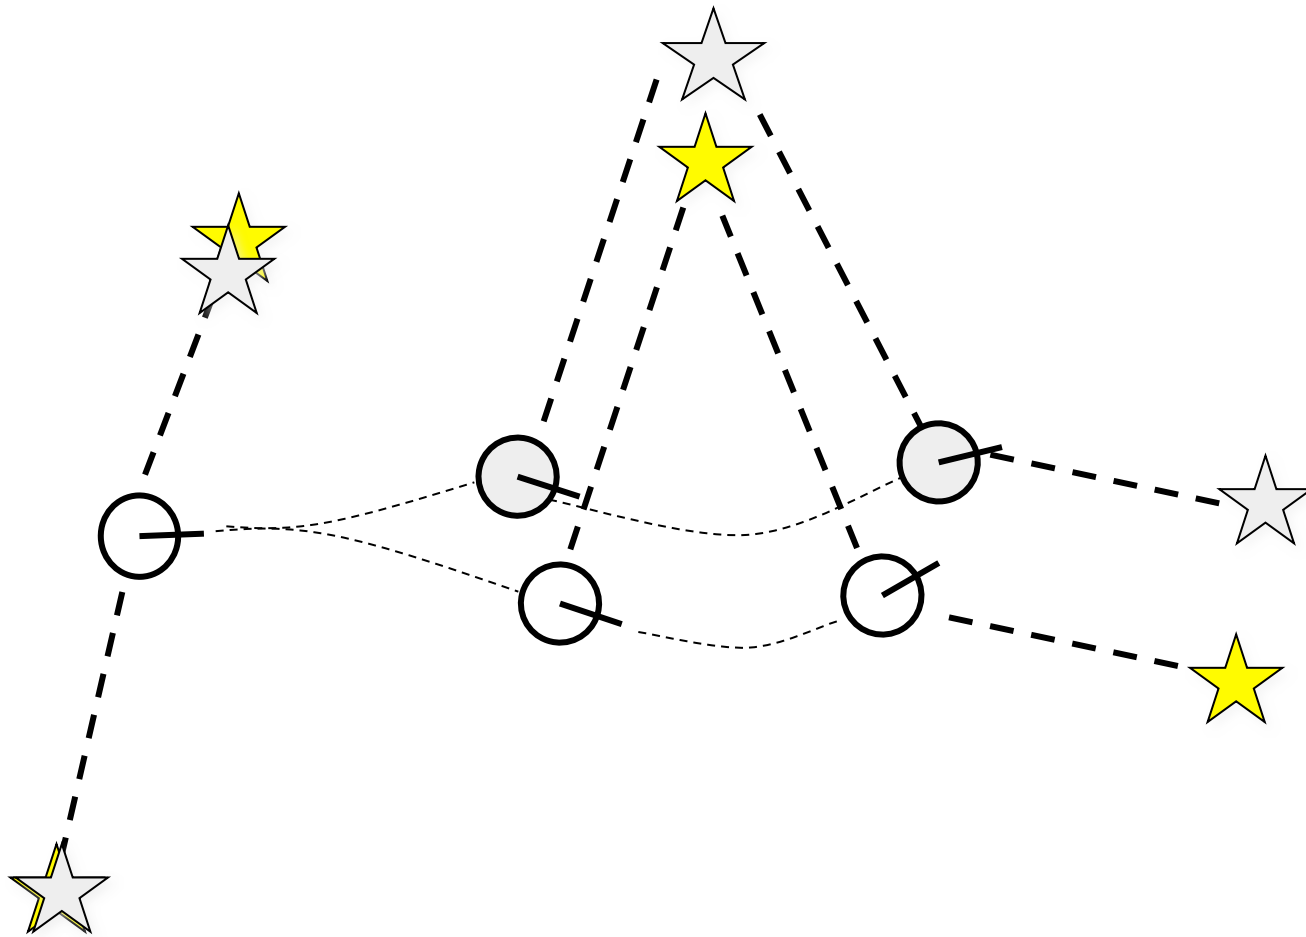

# The SLAM Problem


- SLAM is a **chicken-or-egg** problem:
  - a map is needed for localization and
  - a pose estimate is needed for mapping





# SLAM is Relevant

- It is considered a fundamental problem for truly autonomous robots
- SLAM is the basis for most navigation systems

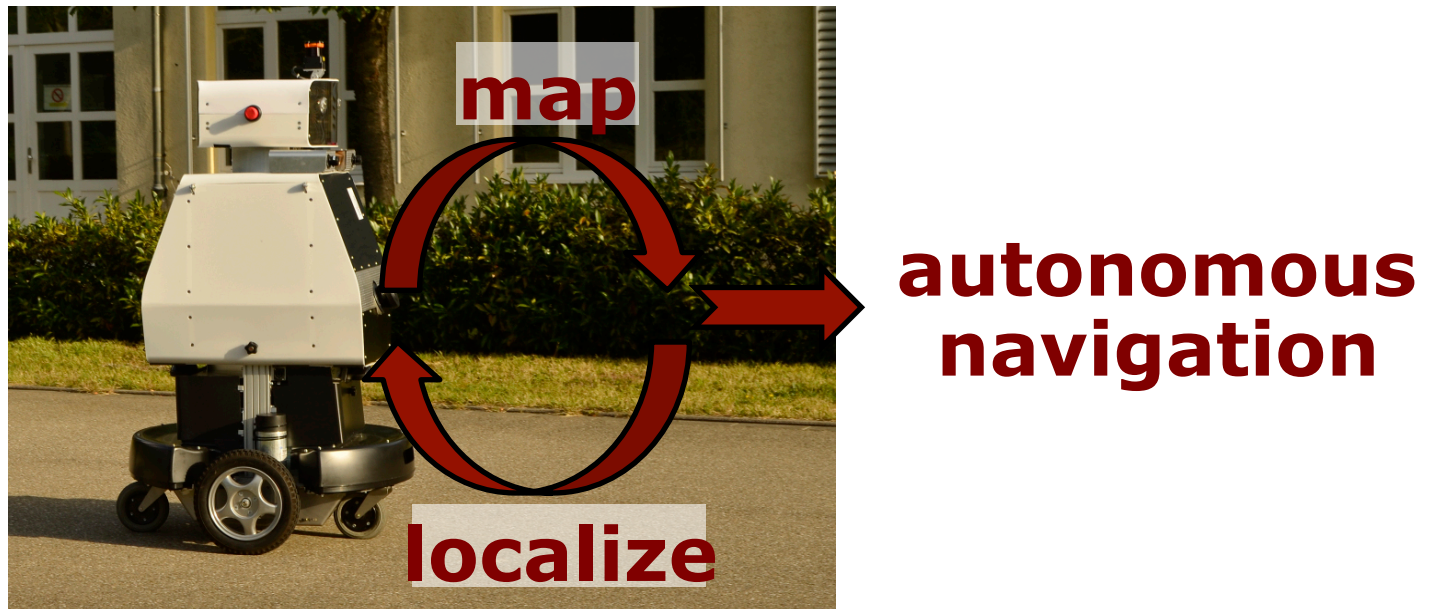



# SLAM Applications

- SLAM is central to a range of indoor, outdoor, in-air and underwater applications for both manned and autonomous vehicles.

## **Examples:**

- At home: vacuum cleaner, lawn mower
- Air: surveillance with unmanned air vehicles
- Underwater: reef monitoring
- Underground: exploration of mines
- Space: terrain mapping for localization

# SLAM Applications

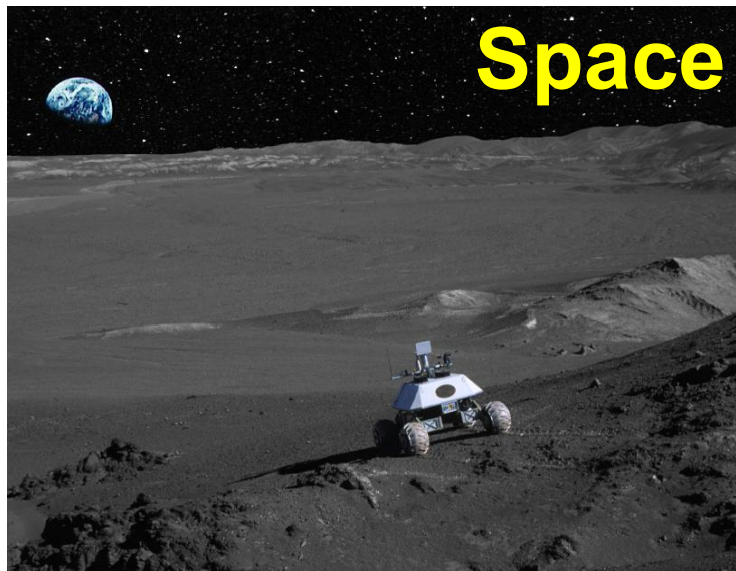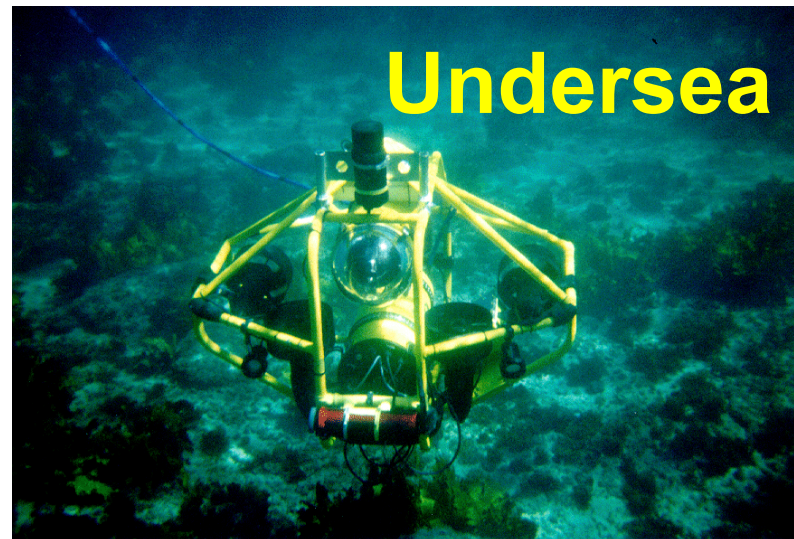

# SLAM Showcase – Mint




Courtesy of Evolution Robotics (now iRobot)

# SLAM Showcase – EUROPA



# Mapping Freiburg CS Campus

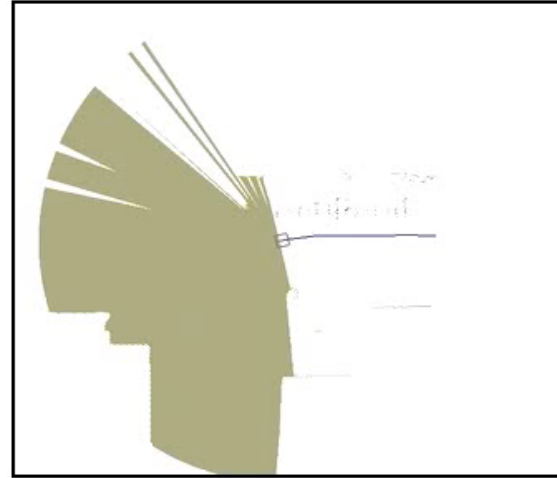

# Definition of the SLAM Problem

## Given

- The robot's controls

$$u_{1:T} = \{u_1, u_2, u_3 \dots, u_T\}$$

- Observations

$$z_{1:T} = \{z_1, z_2, z_3 \dots, z_T\}$$

## Wanted

- Map of the environment

$$m$$

- Path of the robot


$$x_{0:T} = \{x_0, x_1, x_2 \dots, x_T\}$$

# Probabilistic Approaches


- Uncertainty in the robot's motions and observations
- Use the probability theory to explicitly represent the uncertainty



“The robot is exactly here”



$p(x)$

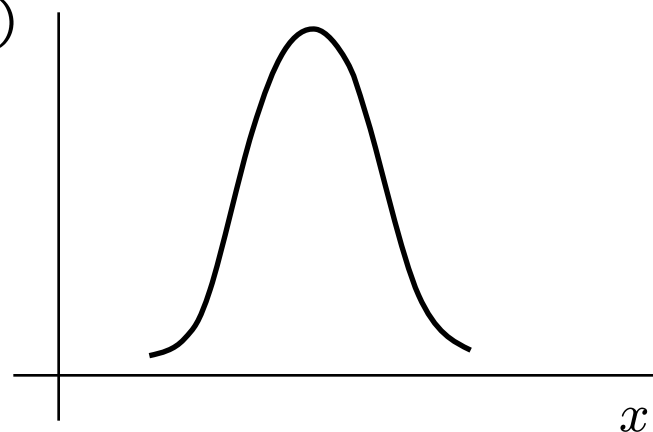


“The robot is somewhere here”




# In Probabilistic Terms

Estimate the robot's path and the map

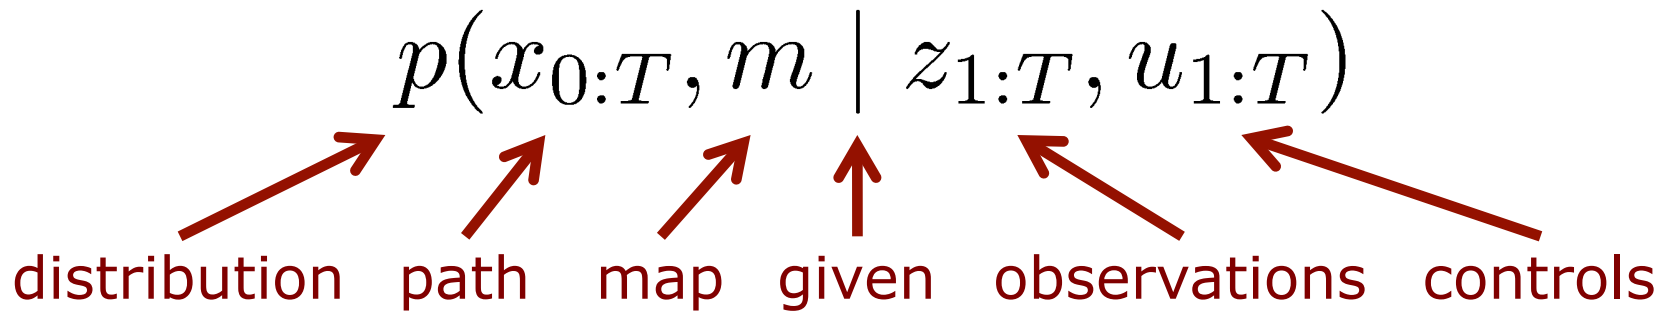

# Graphical Model

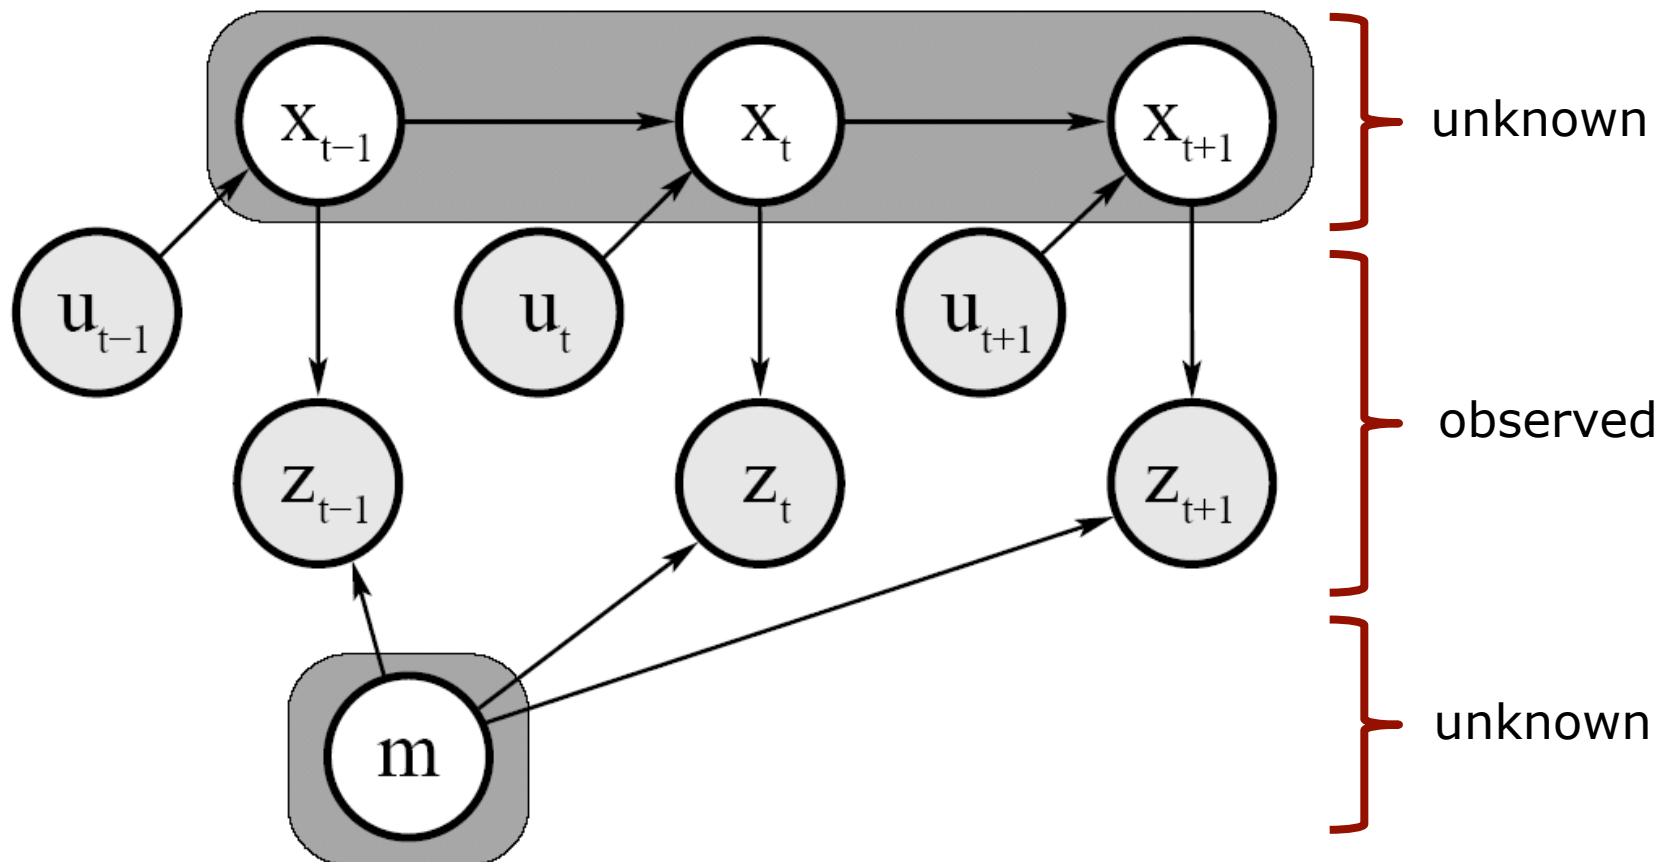

$$p(x_{0:T}, m \mid z_{1:T}, u_{1:T})$$

# Full SLAM vs. Online SLAM


- Full SLAM estimates the entire path

$$p(x_{0:T}, m \mid z_{1:T}, u_{1:T})$$

- Online SLAM seeks to recover only the most recent pose

$$p(x_t, m \mid z_{1:t}, u_{1:t})$$

# Graphical Model of Online SLAM

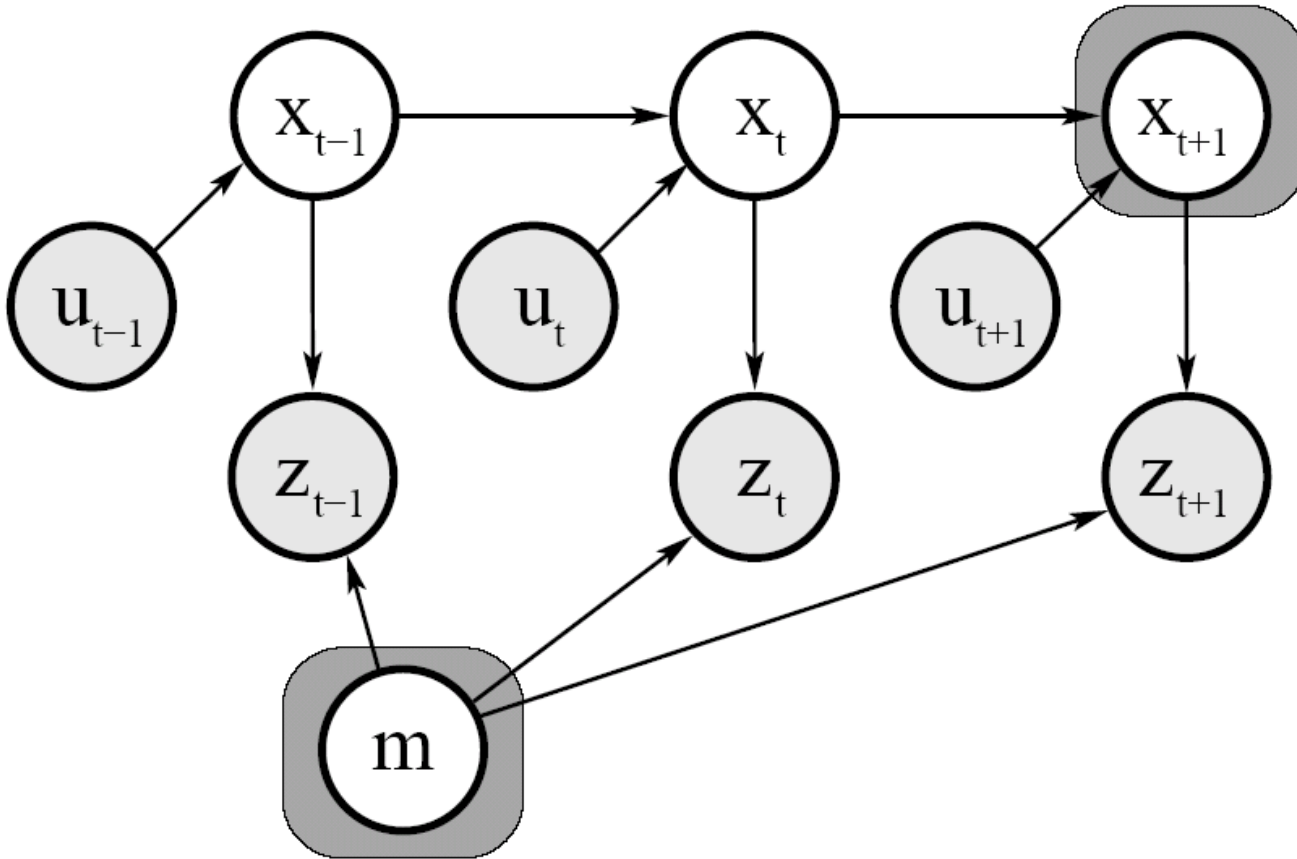

$$p(x_{t+1}, m \mid z_{1:t+1}, u_{1:t+1})$$


# Online SLAM

- Online SLAM means marginalizing out the previous poses

$$p(x_t, m \mid z_{1:t}, u_{1:t}) = \int_{x_0} \dots \int_{x_{t-1}} p(x_{0:t}, m \mid z_{1:t}, u_{1:t}) dx_{t-1} \dots dx_0$$

- Integrations are typically done recursively, one at a time


# Graphical Model of Online SLAM

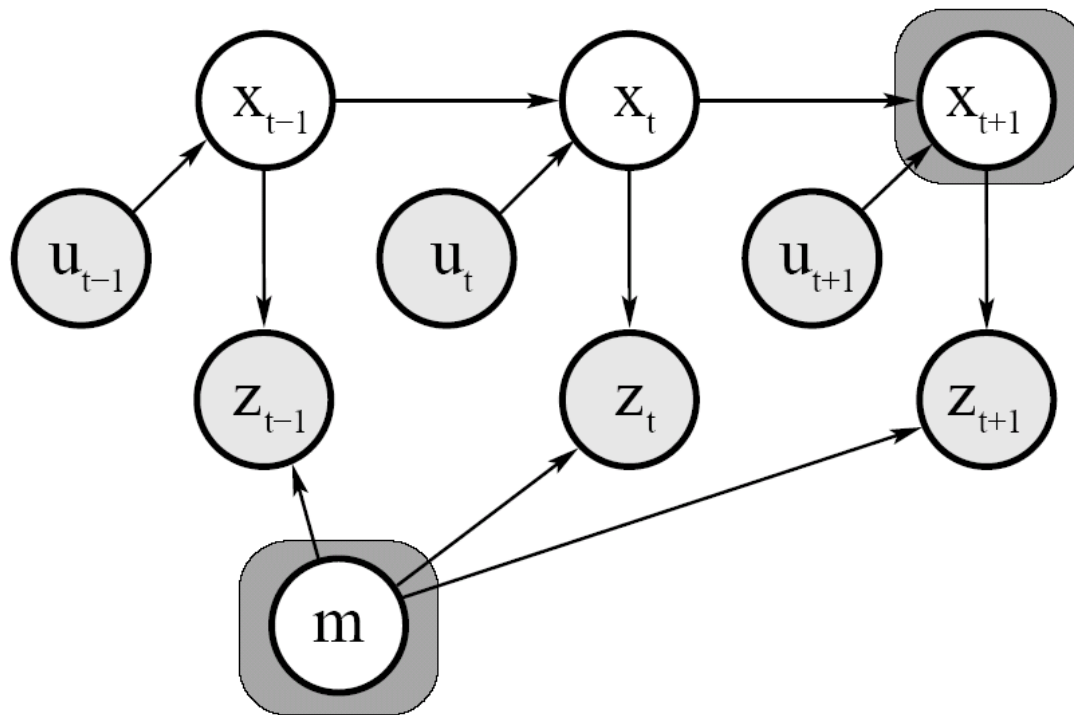

$$p(x_{t+1}, m \mid z_{1:t+1}, u_{1:t+1}) = \int_{x_0} \dots \int_{x_t} p(x_{0:t+1}, m \mid z_{1:t+1}, u_{1:t+1}) dx_t \dots dx_0$$

# Why is SLAM a hard problem?


1. Robot path and map are both **unknown**

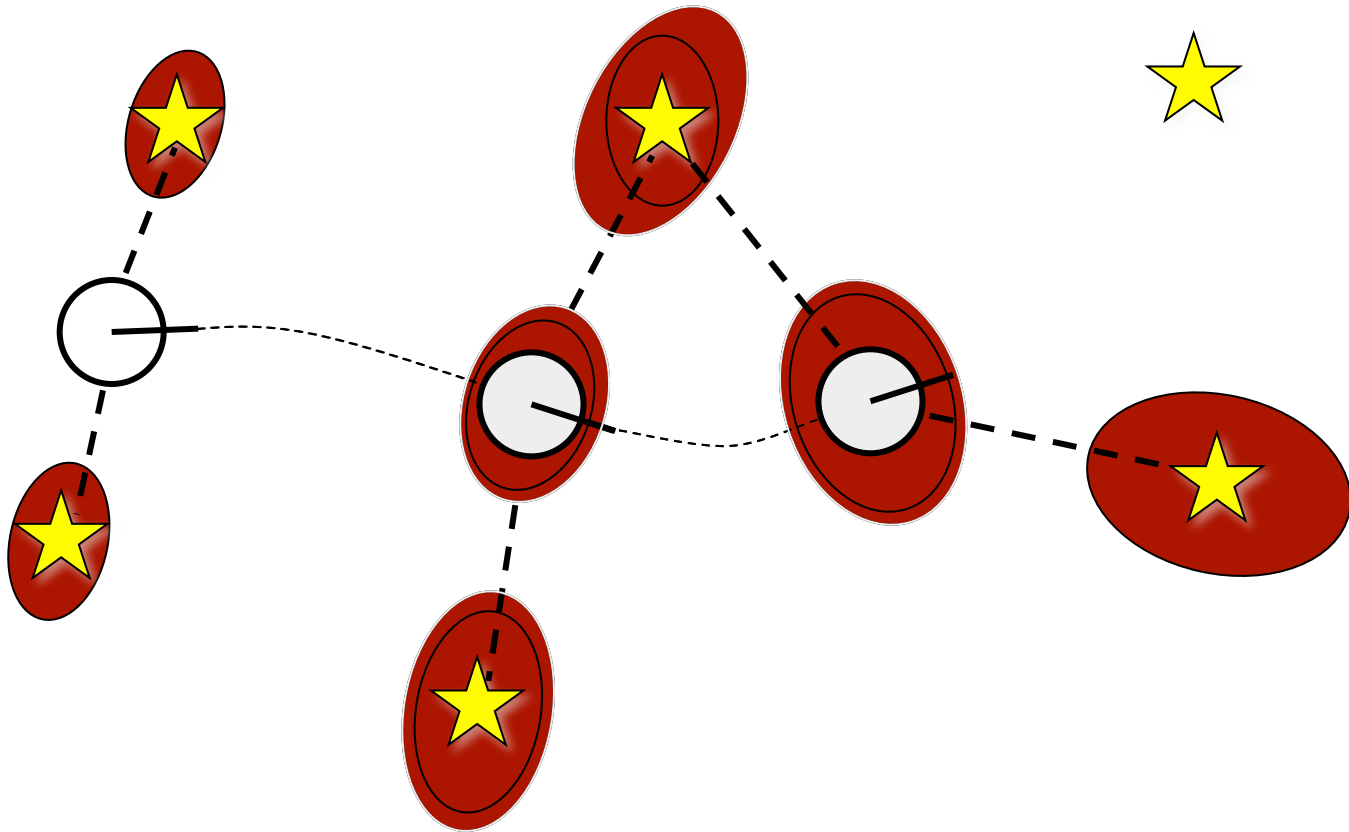

2. Map and pose estimates correlated

# Why is SLAM a hard problem?




- The **mapping between observations and the map is unknown**
- Picking **wrong** data associations can have **catastrophic** consequences (divergence)

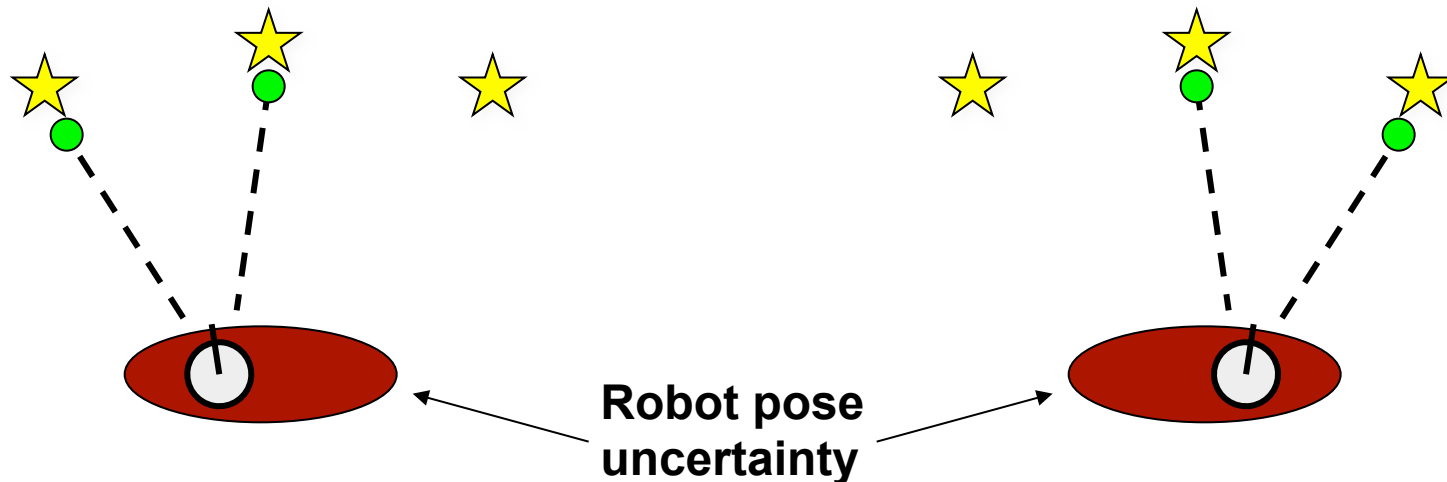



# Taxonomy of the SLAM Problem


## Volumetric vs. feature-based SLAM

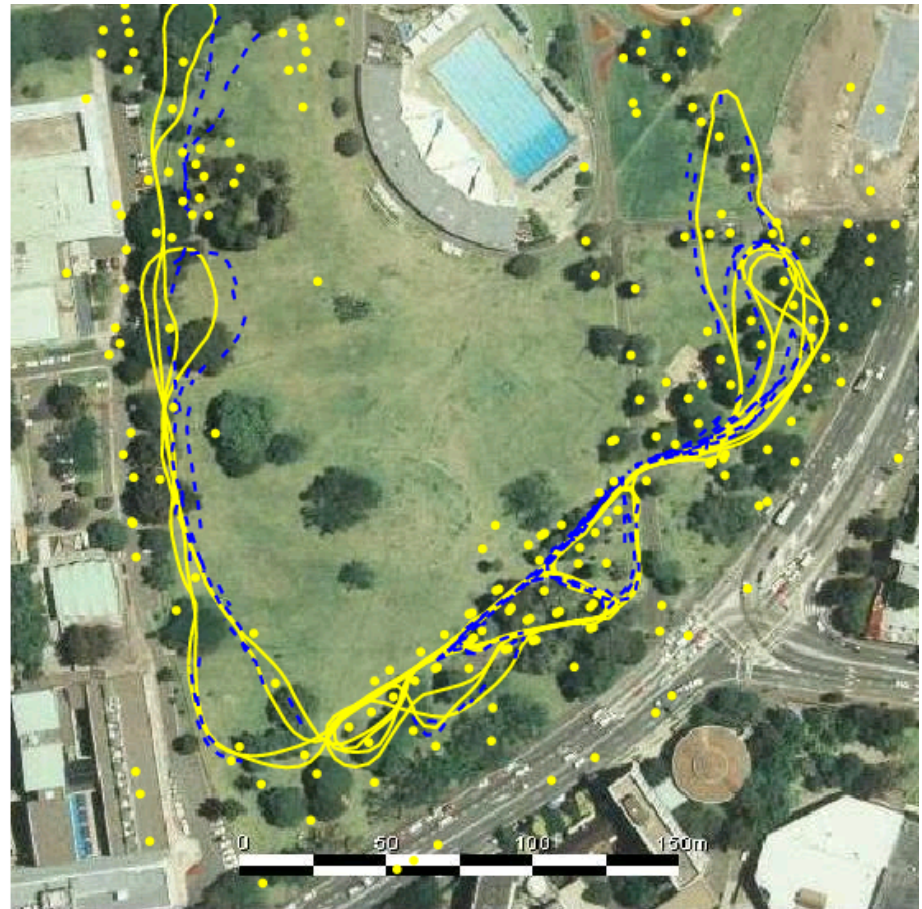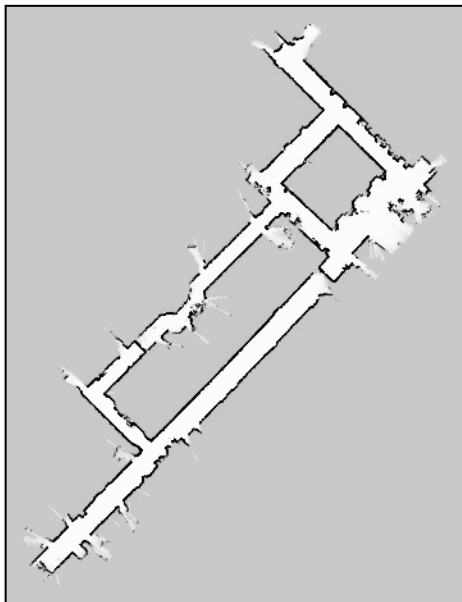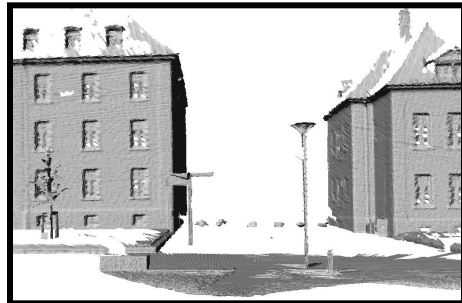

Courtesy by E. Nebot


# Taxonomy of the SLAM Problem

Topologic vs. geometric maps

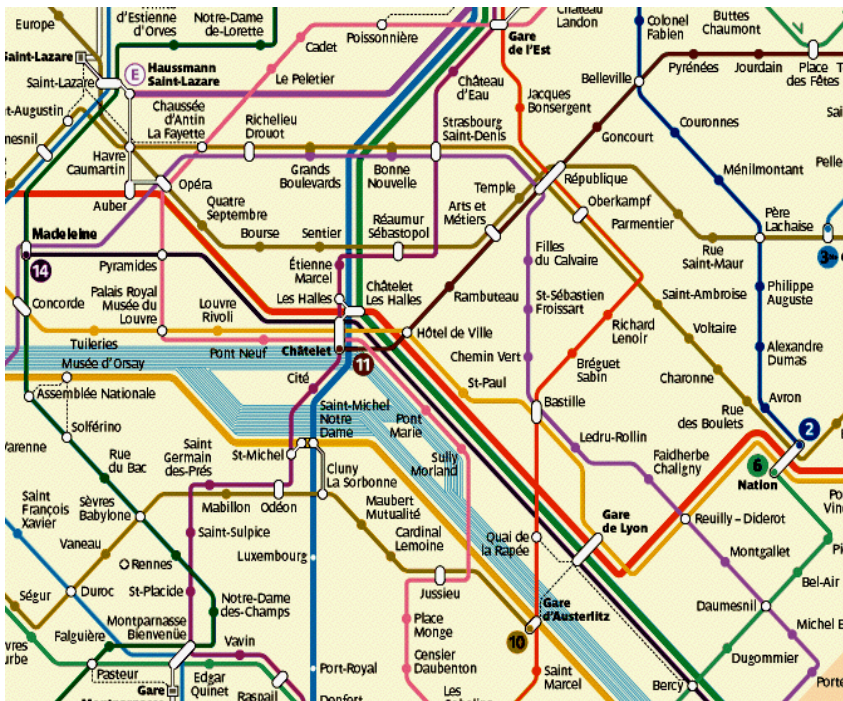

# Taxonomy of the SLAM Problem

Known vs. unknown correspondence

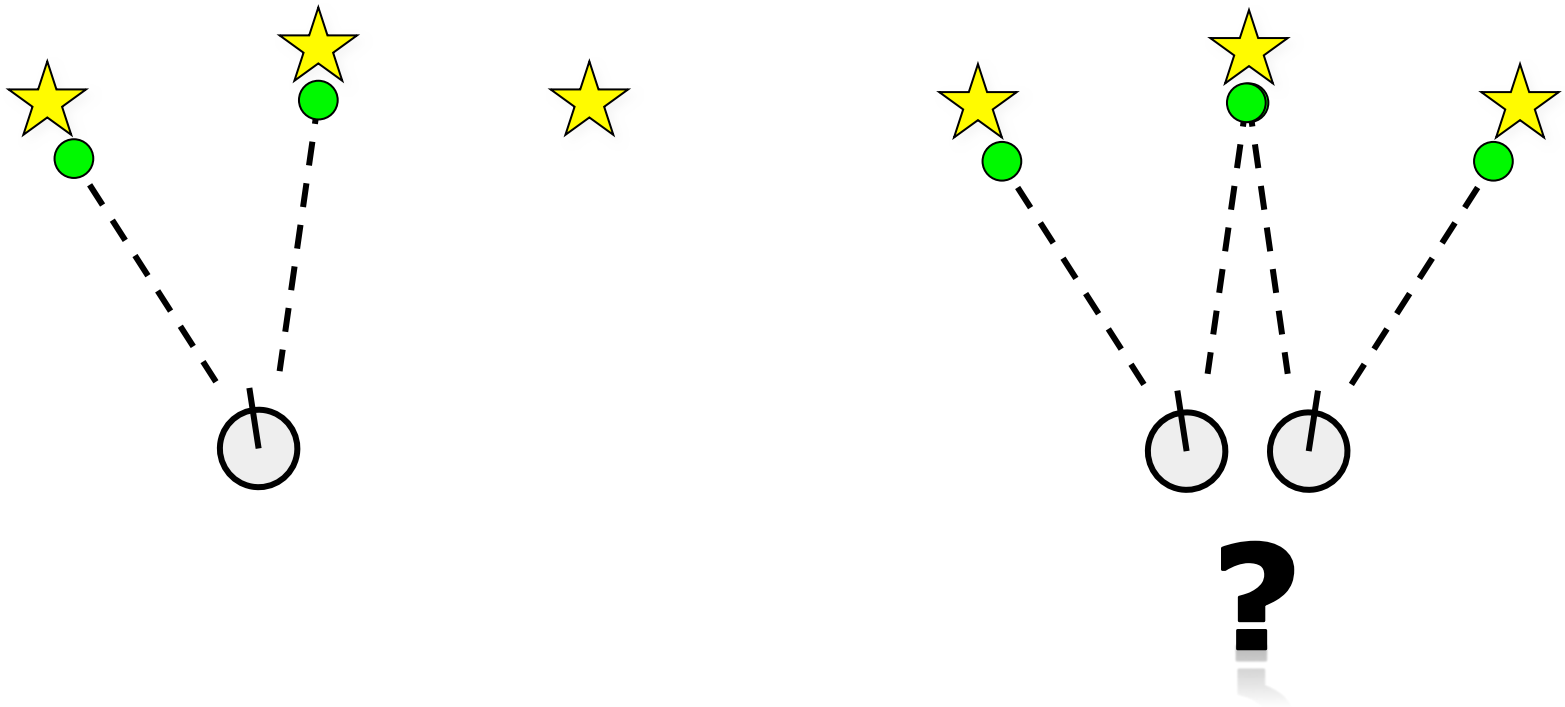



# Taxonomy of the SLAM Problem

Static vs. dynamic environments



# Taxonomy of the SLAM Problem

Small vs. large uncertainty

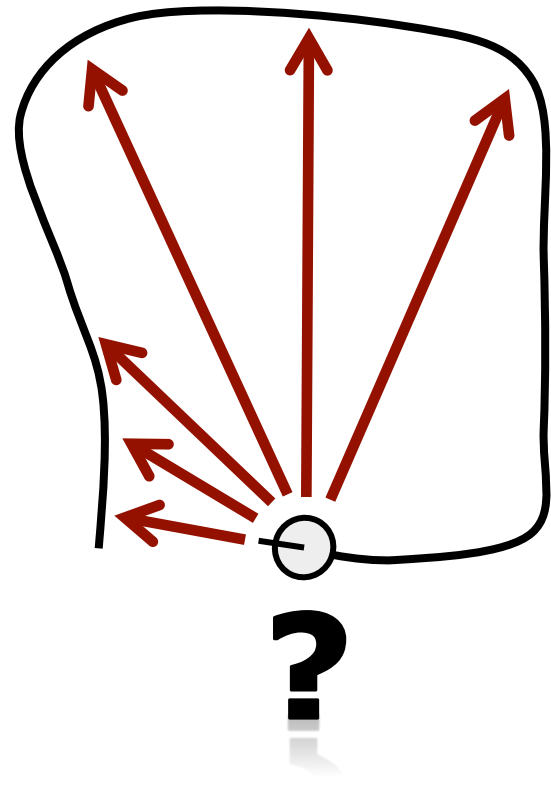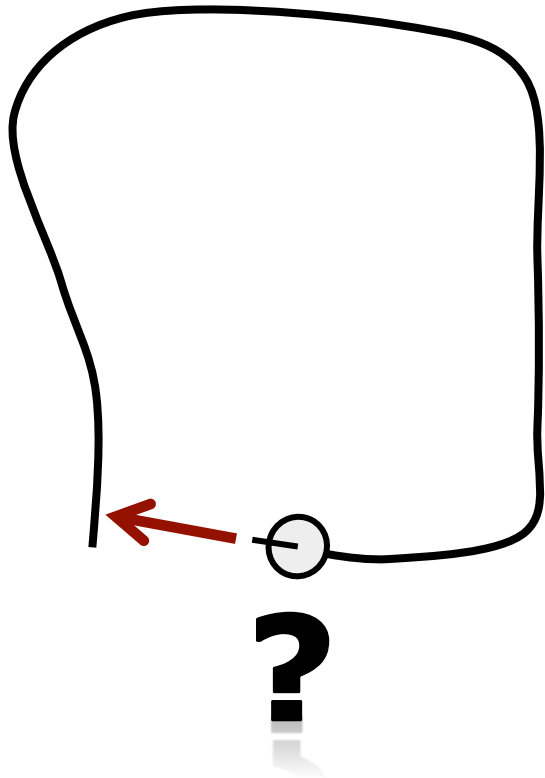

# Taxonomy of the SLAM Problem

## Active vs. passive SLAM

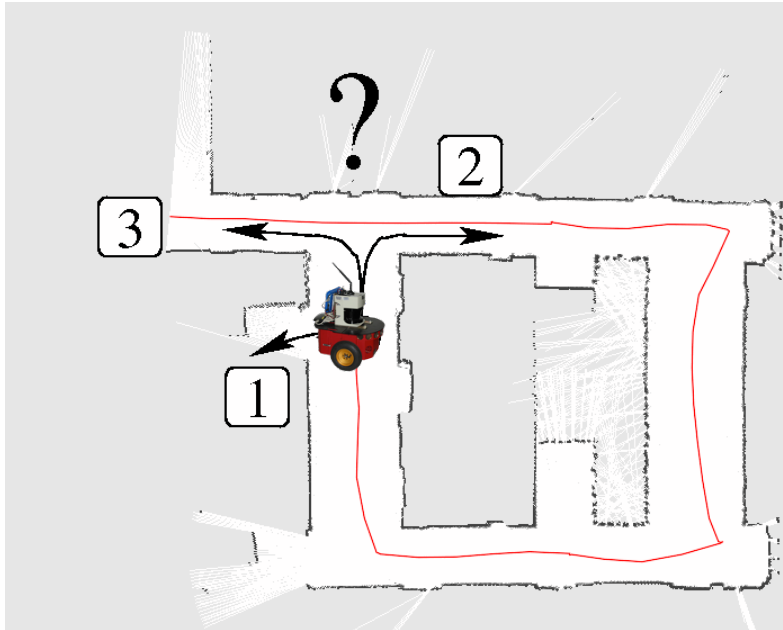


Image courtesy by Petter Duvander


# Taxonomy of the SLAM Problem

Any-time and any-space SLAM



# Taxonomy of the SLAM Problem

Single-robot vs. multi-robot SLAM

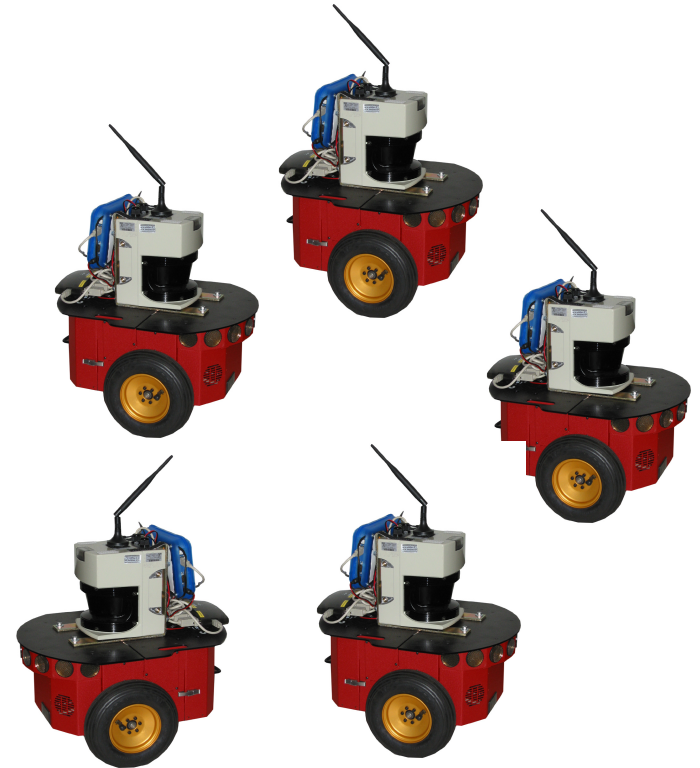



# Approaches to SLAM

- Large variety of different SLAM approaches have been proposed
- Most robotics conferences dedicate multiple tracks to SLAM
- The majority uses probabilistic concepts
- History of SLAM dates back to the mid-eighties

# SLAM History by Durrant-Whyte

- 1985/86: Smith et al. and Durrant-Whyte describe geometric uncertainty and relationships between features or landmarks
- 1986: Discussions at ICRA on how to solve the SLAM problem followed by the key paper by Smith, Self and Cheeseman
- 1990-95: Kalman-filter based approaches
- 1995: SLAM acronym coined at ISRR'95
- 1995-1999: Convergence proofs & first demonstrations of systems
- 2000: Wide interest in SLAM started


# Three Main Paradigms

Kalman  
filter

Particle  
filter


Graph-  
based

# Motion and Observation Model

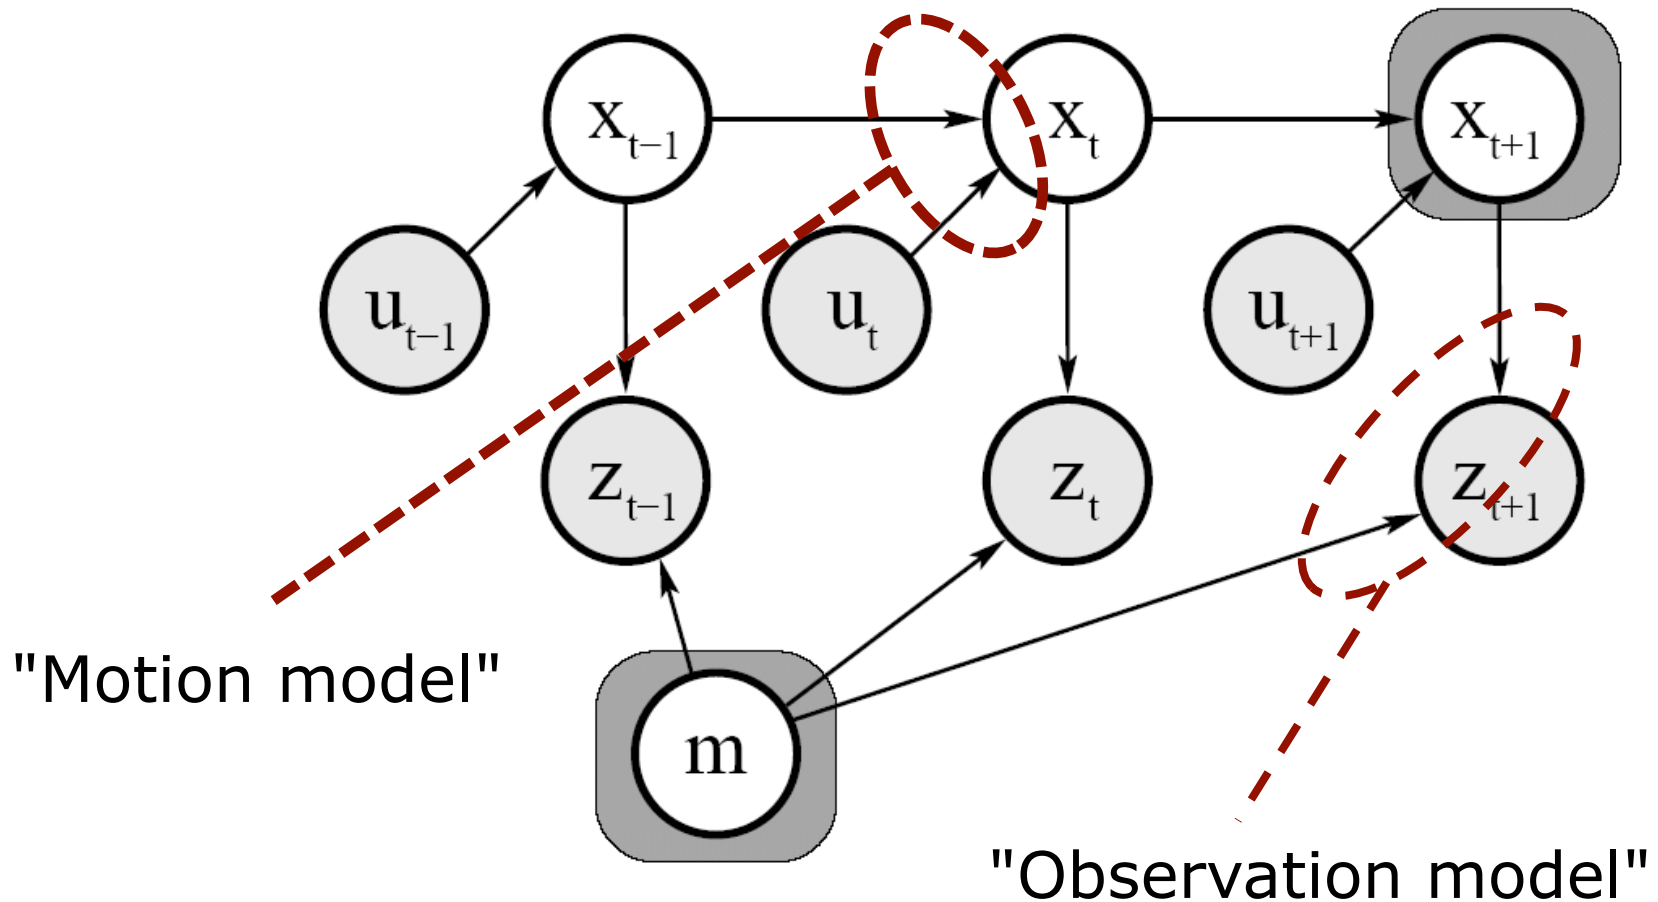


# Motion Model

- The motion model describes the relative motion of the robot

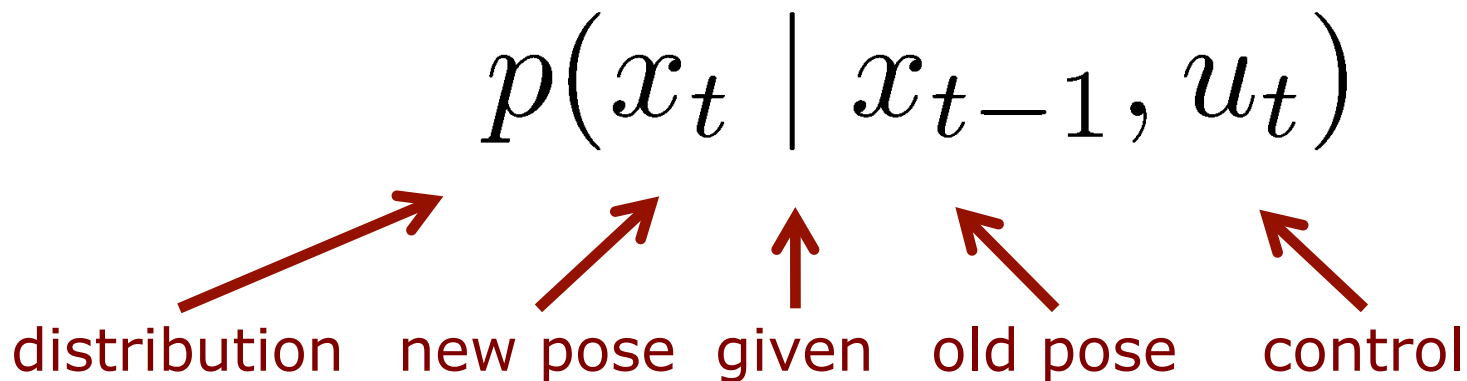

# Motion Model Examples

- Gaussian model

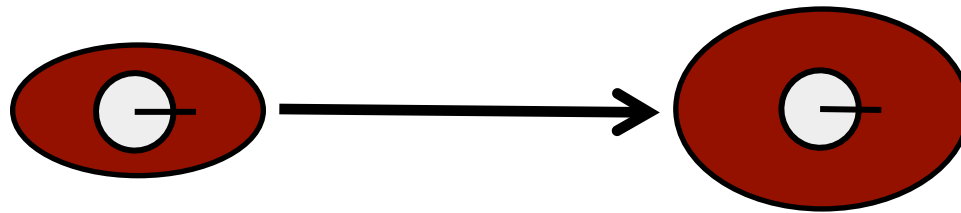

- Non-Gaussian model




# Standard Odometry Model

- Robot moves from  $(\bar{x}, \bar{y}, \bar{\theta})$  to  $(\bar{x}', \bar{y}', \bar{\theta}')$
- Odometry information  $u = (\delta_{rot1}, \delta_{trans}, \delta_{rot2})$

$$\delta_{trans} = \sqrt{(\bar{x}' - \bar{x})^2 + (\bar{y}' - \bar{y})^2}$$

$$\delta_{rot1} = \text{atan2}(\bar{y}' - \bar{y}, \bar{x}' - \bar{x}) - \bar{\theta}$$

$$\delta_{rot2} = \bar{\theta}' - \bar{\theta} - \delta_{rot1}$$

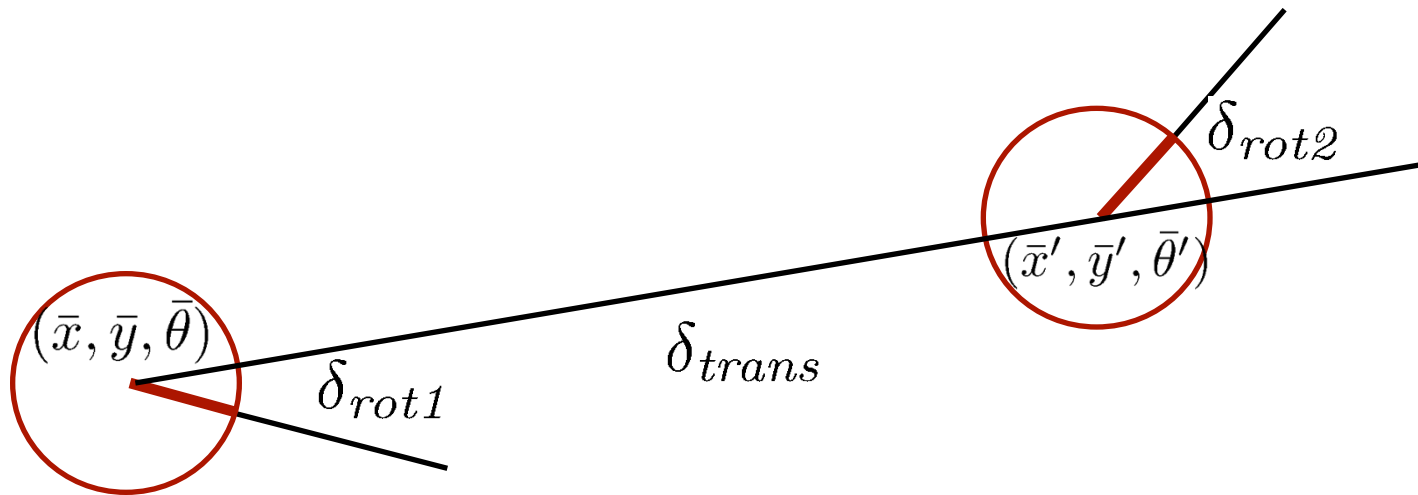


# More on Motion Models

- Course: Introduction to Mobile Robotics, Chapter 6
- Thrun et al. "Probabilistic Robotics", Chapter 5




# Observation Model

- The observation or sensor model relates measurements with the robot's pose

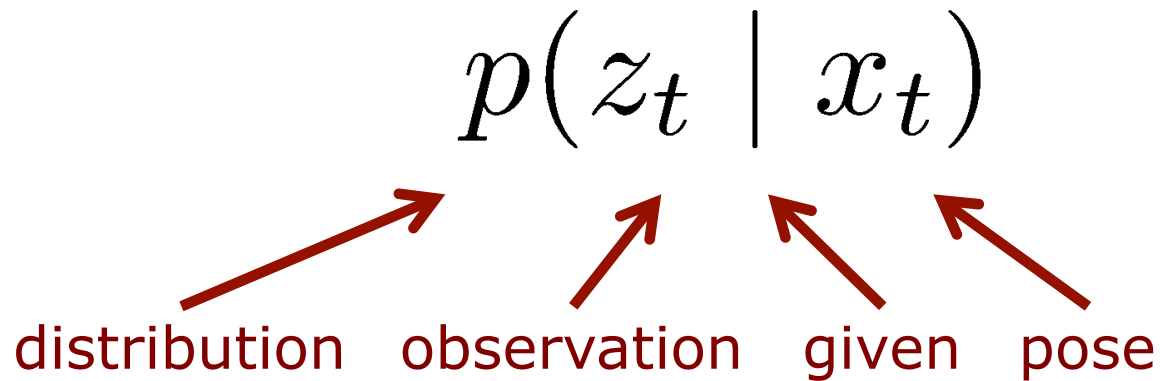


# Observation Model Examples

- Gaussian model



- Non-Gaussian model

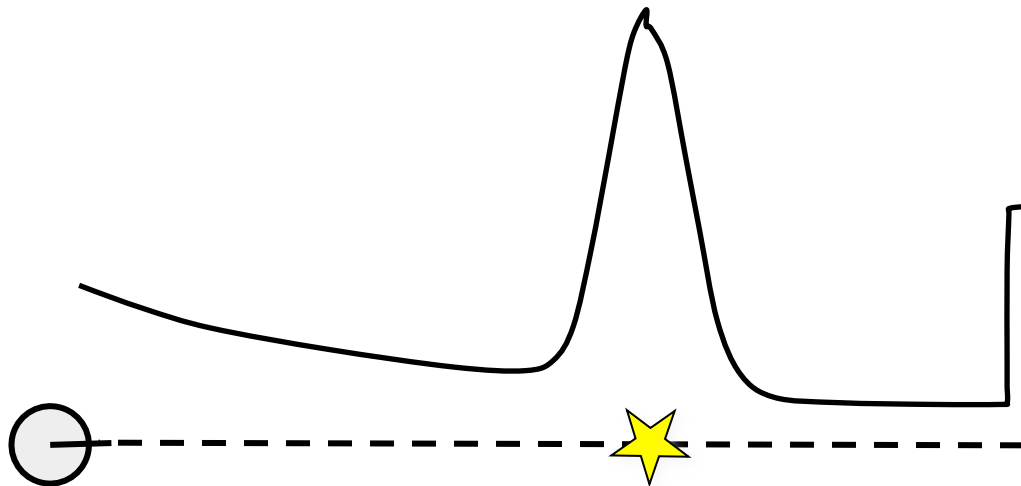

# More on Observation Models

- Course: Introduction to Mobile Robotics, Chapter 7
- Thrun et al. "Probabilistic Robotics", Chapter 6

# Summary

- Mapping is the task of modeling the environment
- Localization means estimating the robot's pose
- SLAM = simultaneous localization and mapping
- Full SLAM vs. Online SLAM
- Rich taxonomy of the SLAM problem

# Literature

## **SLAM Overview**

- Springer “Handbook on Robotics”, Chapter on Simultaneous Localization and Mapping (1<sup>st</sup> Ed: Chap. 37.1-37.2)

## **On motion and observation models**

- Thrun et al. “Probabilistic Robotics”, Chapters 5 & 6
- Course: Introduction to Mobile Robotics, Chapters 6 & 7