


# Introduction to Mobile Robotics

## **Mapping with Known Poses**

# Why Mapping?

- Learning maps is one of the fundamental problems in mobile robotics
- Maps allow robots to efficiently carry out their tasks, allow localization ...
- Successful robot systems rely on maps for localization, path planning, activity planning etc.

# The General Problem of Mapping

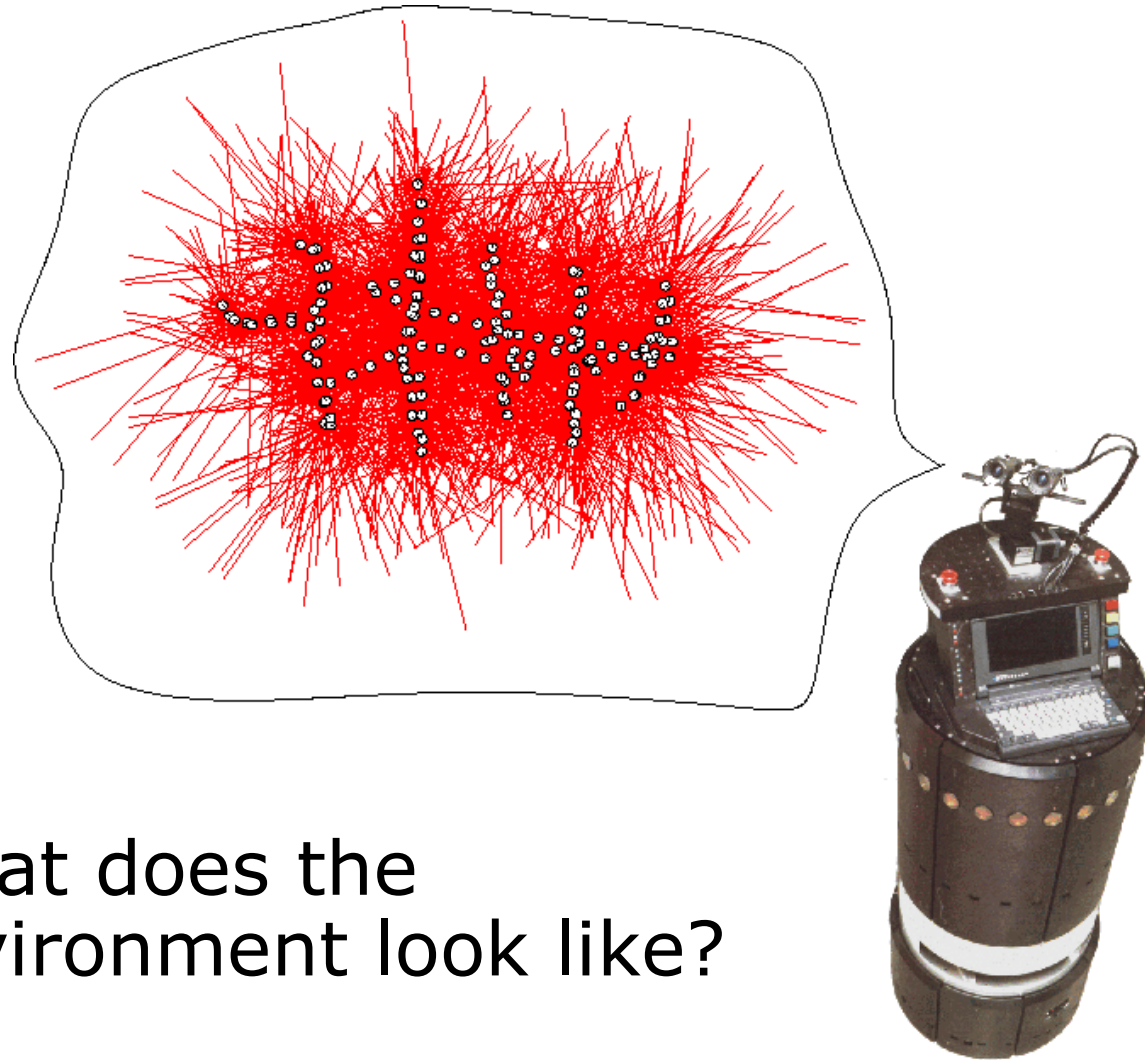

What does the environment look like?

# The General Problem of Mapping

- Formally, mapping involves, given the sensor data,

$$d = \{u_1, z_1, u_2, z_2, \dots, u_n, z_n\}$$

to calculate the most likely map




$$m^* = \arg \max_m P(m | d)$$

# Mapping as a Chicken and Egg Problem

- So far we learned how to estimate the pose of the vehicle given the data and the map.
- Mapping, however, involves to simultaneously estimate the pose of the vehicle and the map.
- The general problem is therefore denoted as the simultaneous localization and mapping problem (SLAM).
- Throughout this section we will describe how to calculate a map given we know the pose of the vehicle.




# Types of SLAM-Problems

- Grid maps or scans

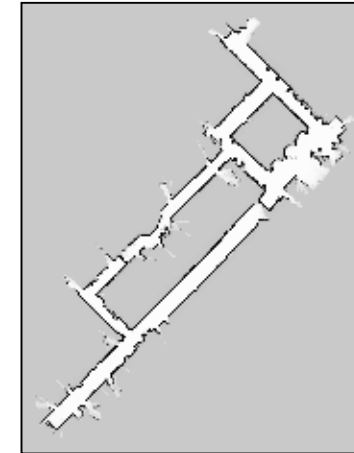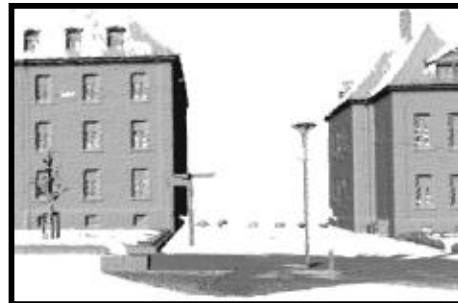

[Lu & Milios, 97; Gutmann, 98; Thrun 98; Burgard, 99; Konolige & Gutmann, 00; Thrun, 00; Arras, 99; Haehnel, 01;...]

- Landmark-based

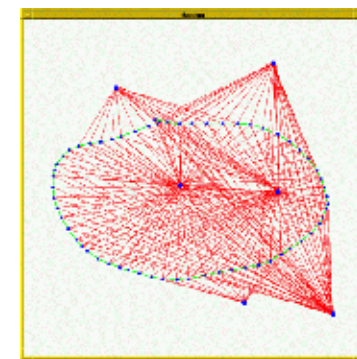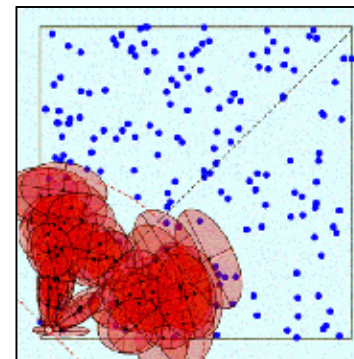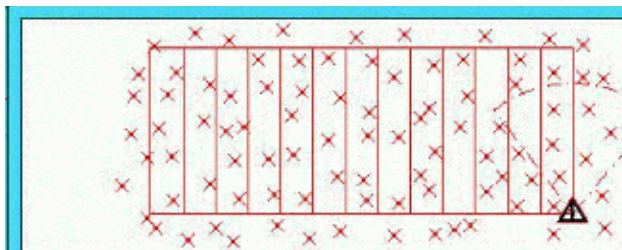

[Leonard et al., 98; Castelanos et al., 99; Dissanayake et al., 2001; Montemerlo et al., 2002;...]

# Problems in Mapping

- Sensor interpretation
  - How do we **extract relevant information** from raw sensor data?
  - How do we represent and **integrate** this information **over time**?
- Robot locations have to be estimated
  - How can we identify that we are at a **previously visited place**?
  - This problem is the so-called **data association problem**.

# Occupancy Grid Maps

- Introduced by Moravec and Elfes in 1985
- Represent environment by a grid.
- Estimate the probability that a location is occupied by an obstacle.
- **Key assumptions**
  - Occupancy of individual cells ( $m[xy]$ ) is independent

$$\begin{aligned} Bel(m_t) &= P(m_t \mid u_1, z_2 \dots, u_{t-1}, z_t) \\ &= \prod_{x,y} Bel(m_t^{[xy]}) \end{aligned}$$

- Robot positions are known!



# Updating Occupancy Grid Maps

- **Idea:** Update each individual cell using a **binary Bayes filter**.

$$Bel(m_t^{[xy]}) = \eta p(z_t | m_t^{[xy]}) \int p(m_t^{[xy]} | m_{t-1}^{[xy]}, u_{t-1}) Bel(m_{t-1}^{[xy]}) dm_{t-1}^{[xy]}$$

- **Additional assumption:** Map is static.

# Updating Occupancy Grid Maps

- Update the map cells using the **inverse sensor model**

$$Bel(m_t^{[xy]}) = 1 - \left( 1 + \frac{P(m_t^{[xy]} | z_t, u_{t-1})}{1 - P(m_t^{[xy]} | z_t, u_{t-1})} \cdot \frac{1 - P(m_t^{[xy]})}{P(m_t^{[xy]})} \cdot \frac{Bel(m_{t-1}^{[xy]})}{1 - Bel(m_{t-1}^{[xy]})} \right)^{-1}$$


- Or use the **log-odds representation**

$$\begin{aligned} \bar{B}(m_t^{[xy]}) &= \log odds(m_t^{[xy]} | z_t, u_{t-1}) \\ &\quad - \log odds(m_t^{[xy]}) \\ &\quad + \bar{B}(m_{t-1}^{[xy]}) \end{aligned}$$


$$\begin{aligned} \bar{B}(m_t^{[xy]}) &:= \log odds(m_t^{[xy]}) \\ odds(x) &:= \left( \frac{P(x)}{1 - P(x)} \right) \end{aligned}$$

# Typical Sensor Model for Occupancy Grid Maps


Combination of a linear function and a  
Gaussian:

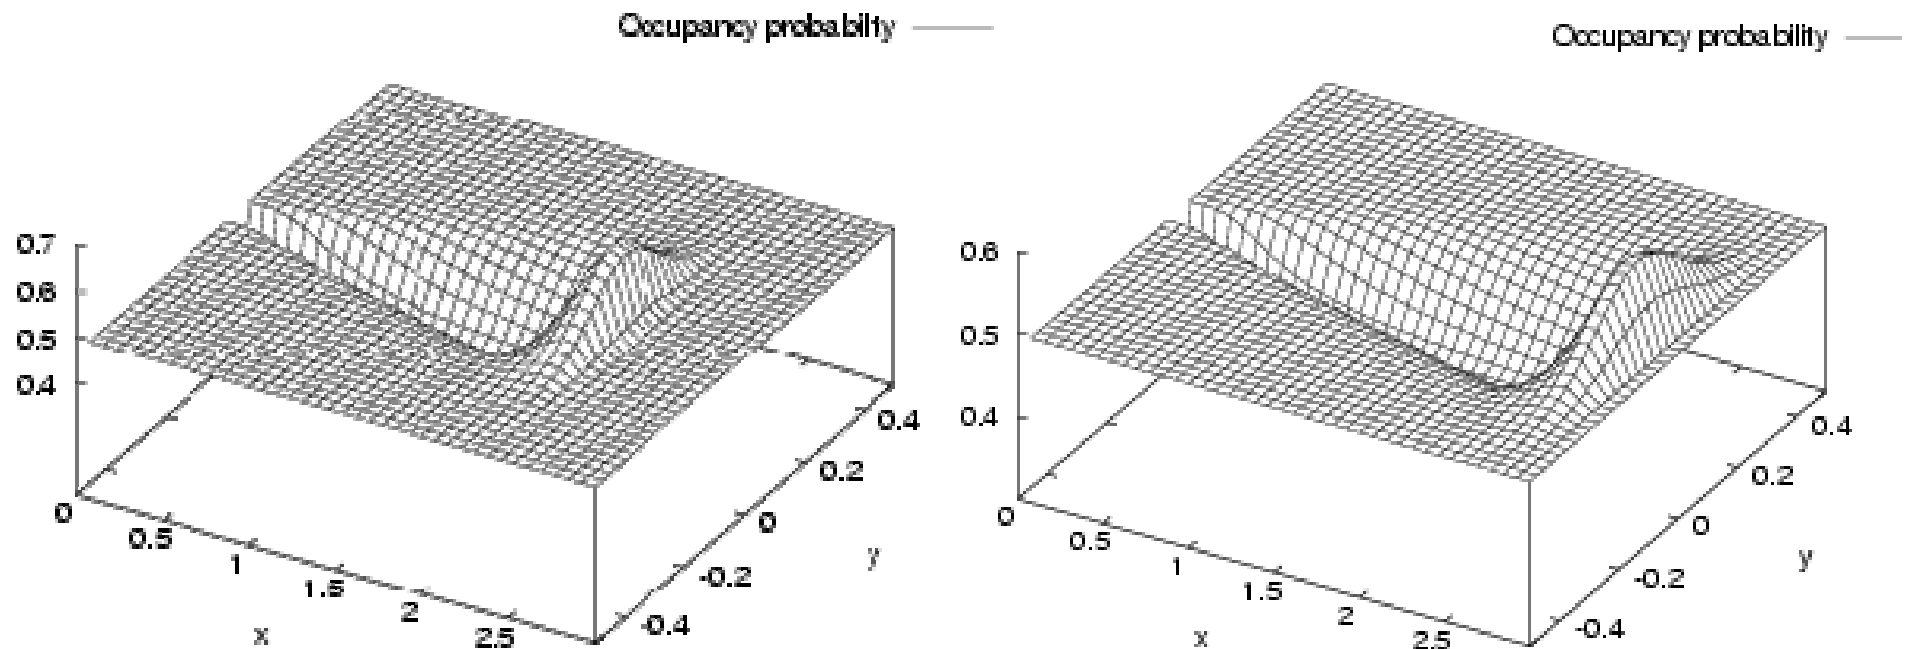

# Key Parameters of the Model

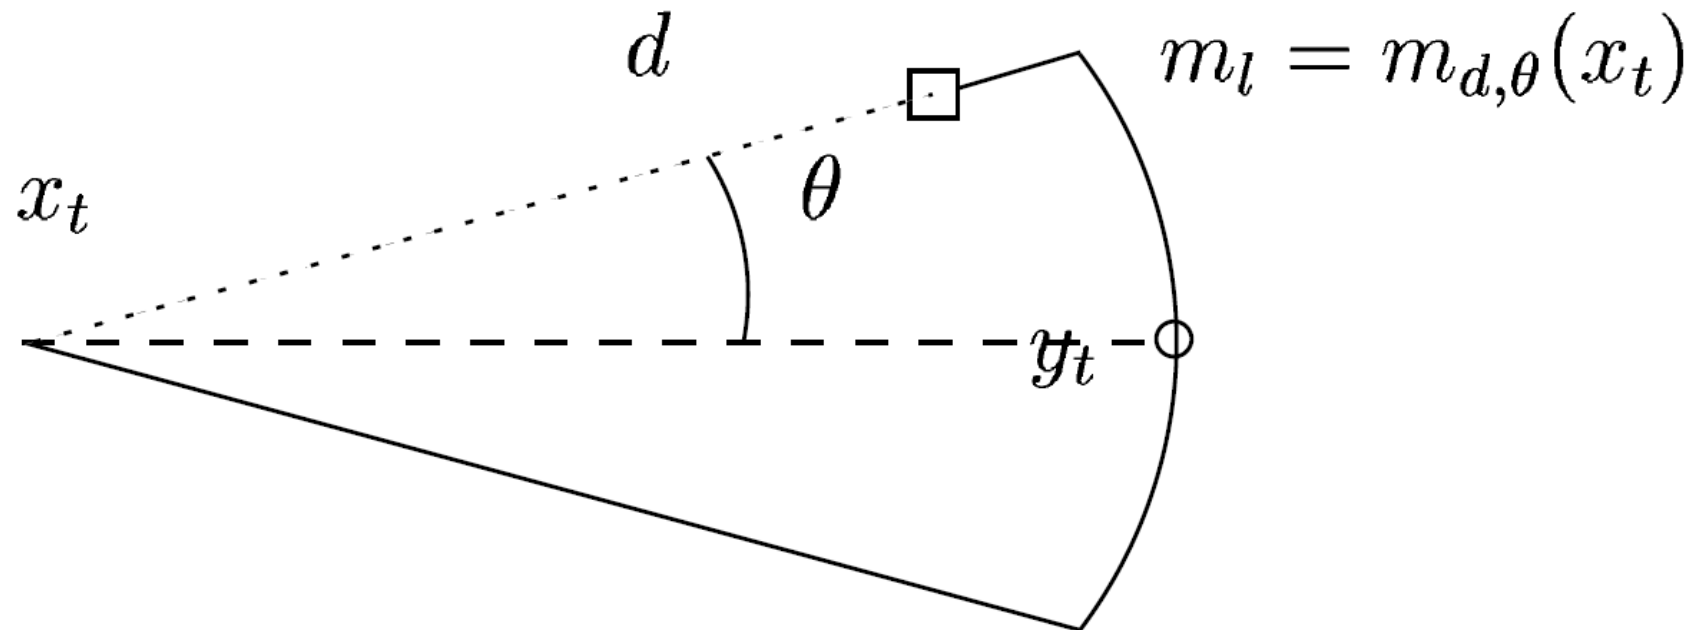


# Occupancy Value Depending on the Measured Distance

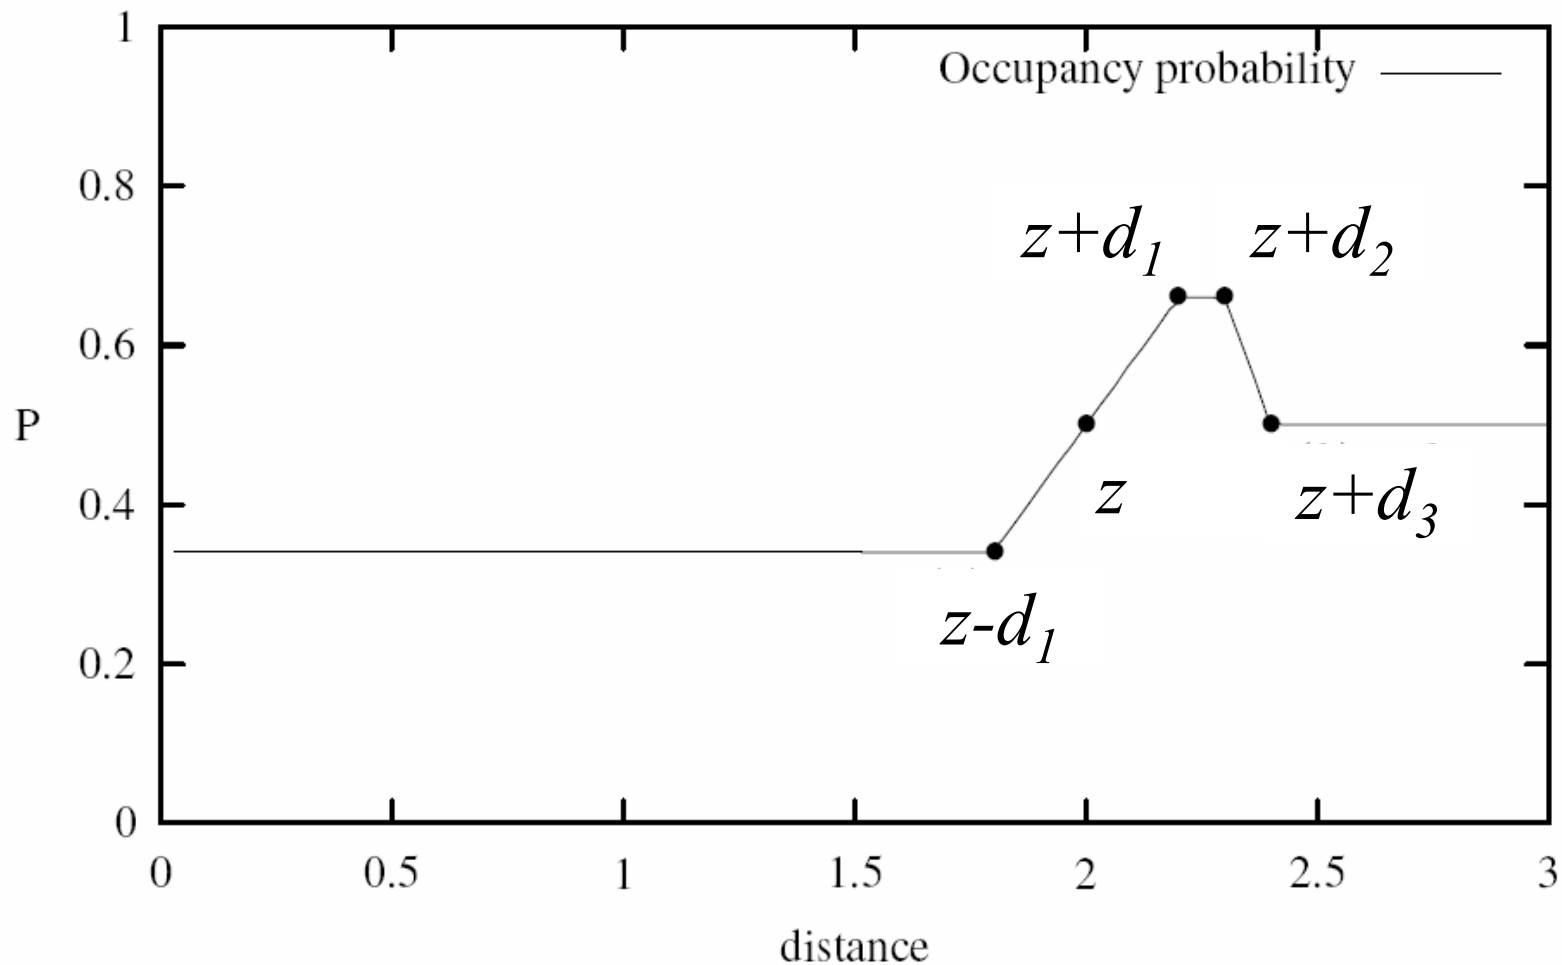

# Deviation from the Prior Belief (the sphere of influence of the sensors)

s ———

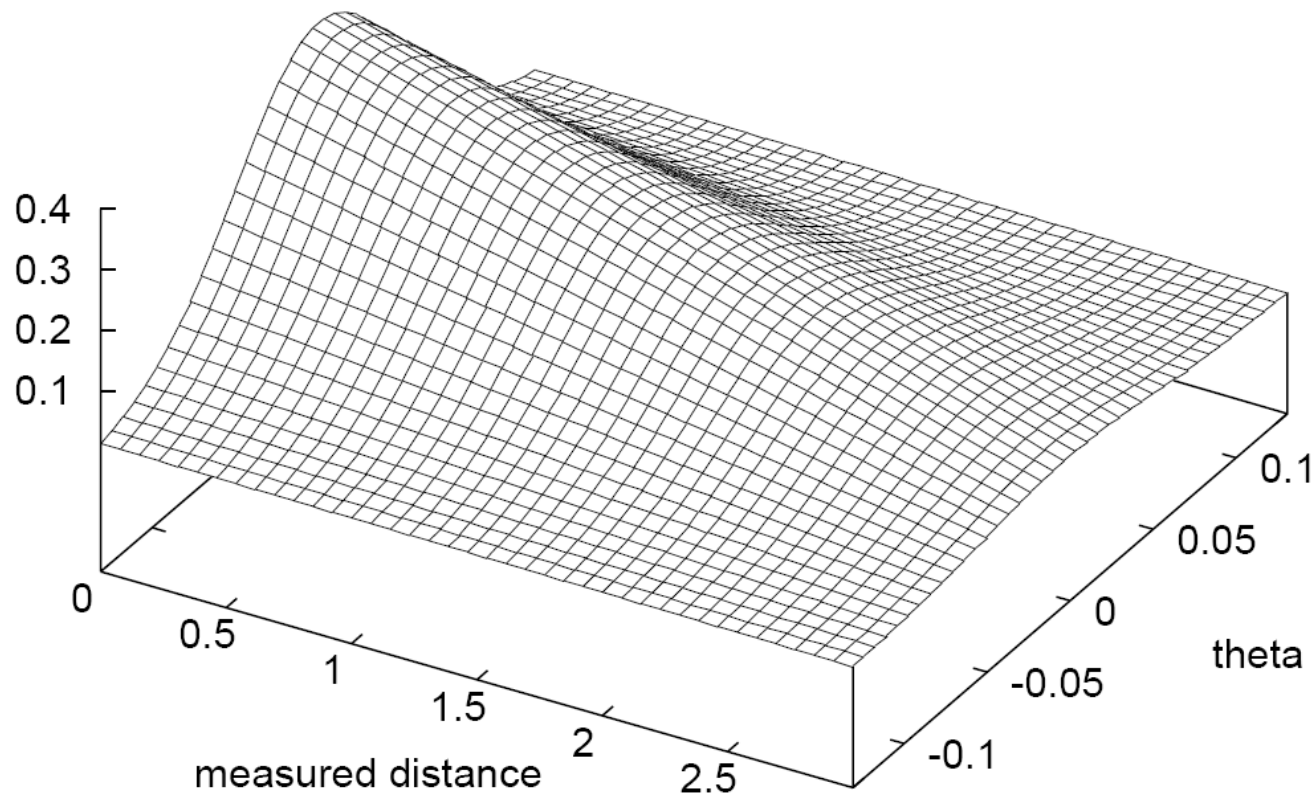


# Calculating the Occupancy Probability Based on Single Observations

$$P(m_{d,\theta}(x(k)) \mid y(k), x(k)) = P(m_{d,\theta}(x(k)))$$


$$+ \begin{cases} -s(y(k), \theta) & d < y(k) - d_1 \\ -s(y(k), \theta) + \frac{s(y(k), \theta)}{d_1} (d - y(k) + d_1) & d < y(k) + d_1 \\ s(y(k), \theta) & d < y(k) + d_2 \\ s(y(k), \theta) - \frac{s(y(k), \theta)}{d_3 - d_2} (d - y(k) - d_2) & d < y(k) + d_3 \\ 0 & \text{otherwise.} \end{cases}$$

# Incremental Updating of Occupancy Grids (Example)

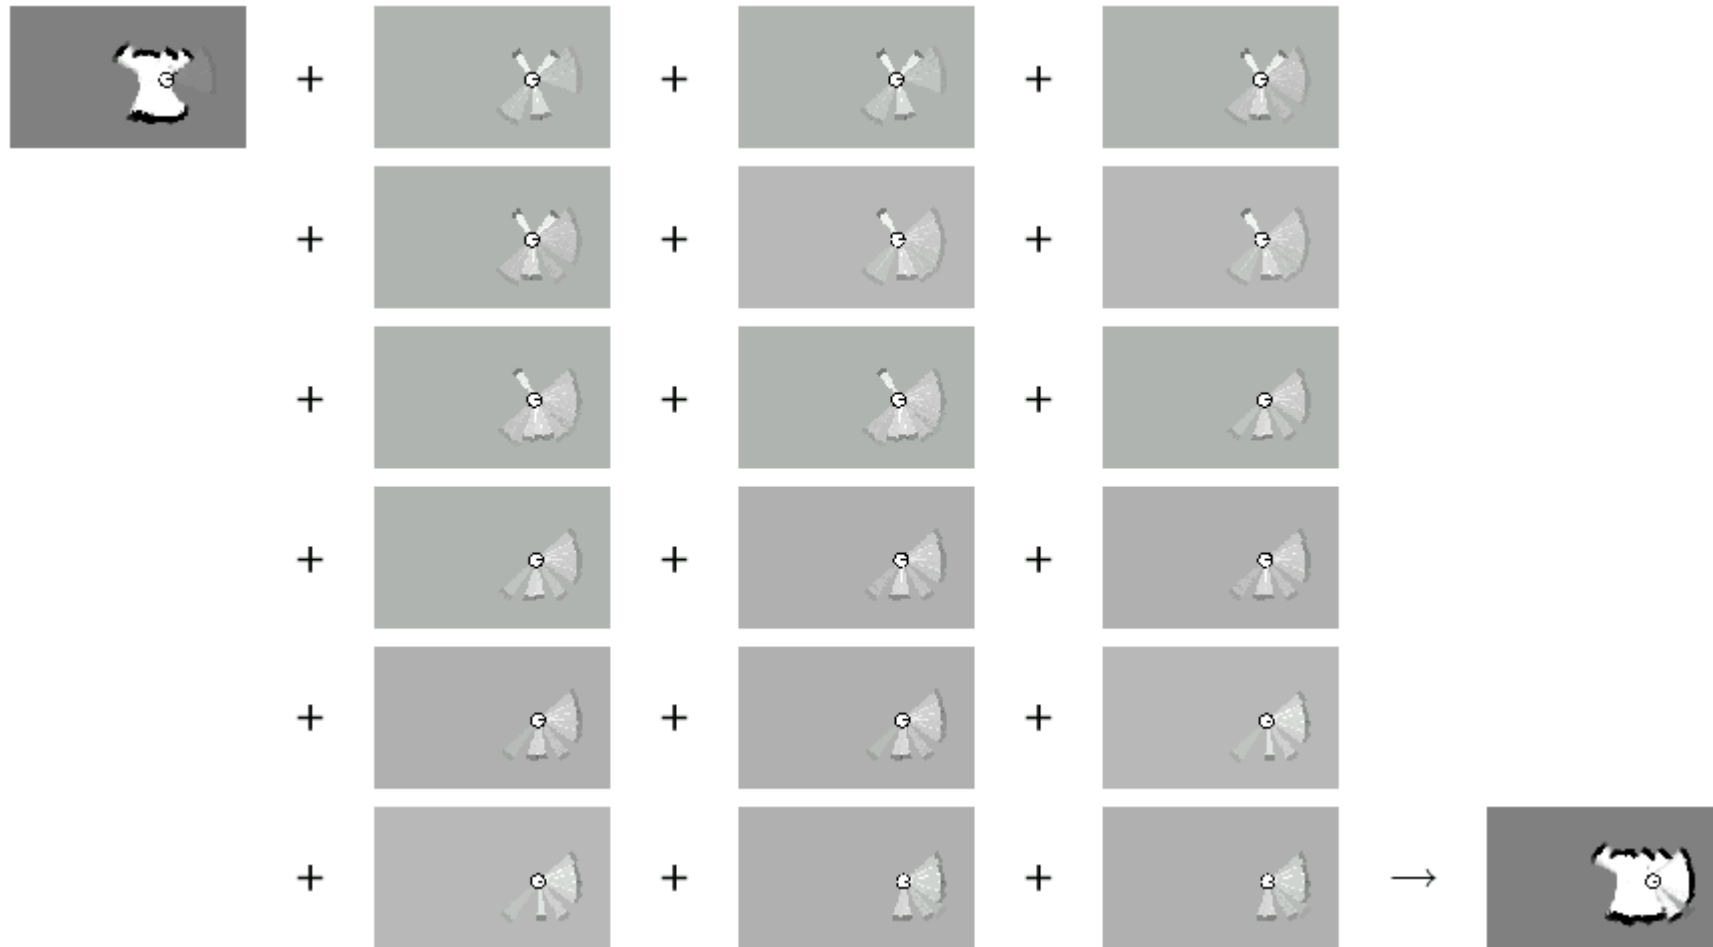




# Resulting Map Obtained with Ultrasound Sensors



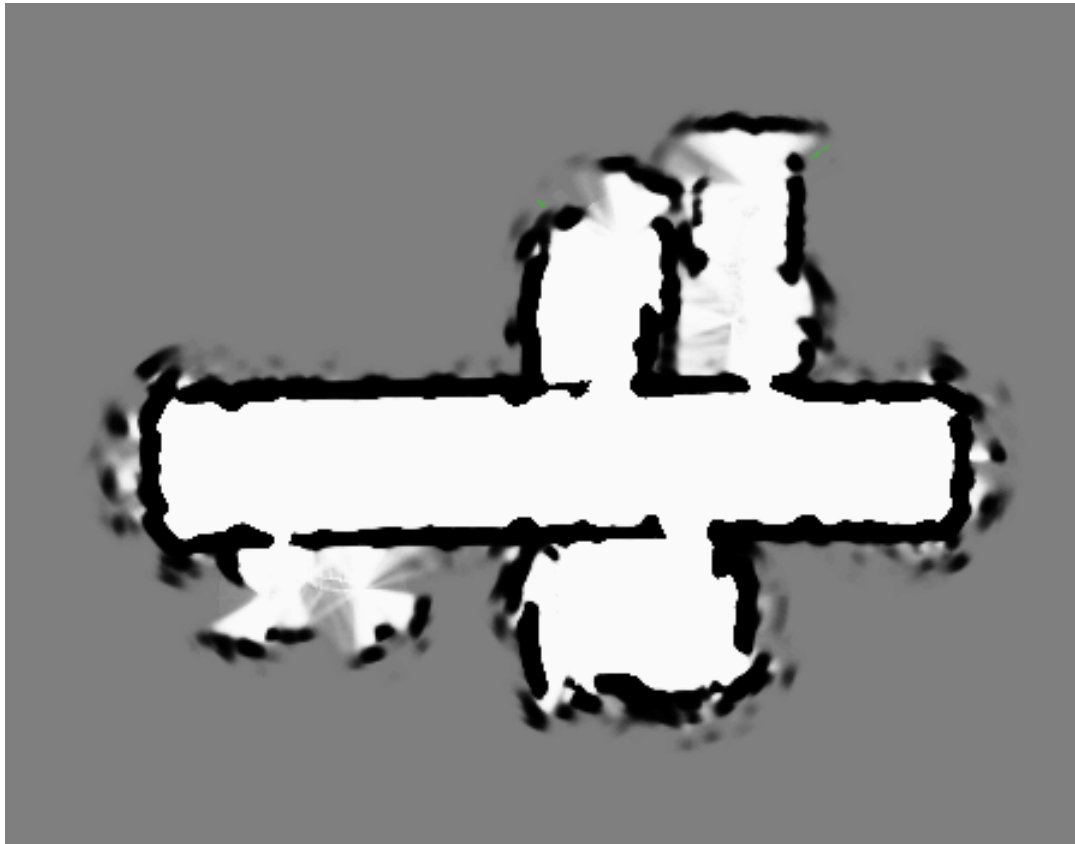


# Resulting Occupancy and Maximum Likelihood Map

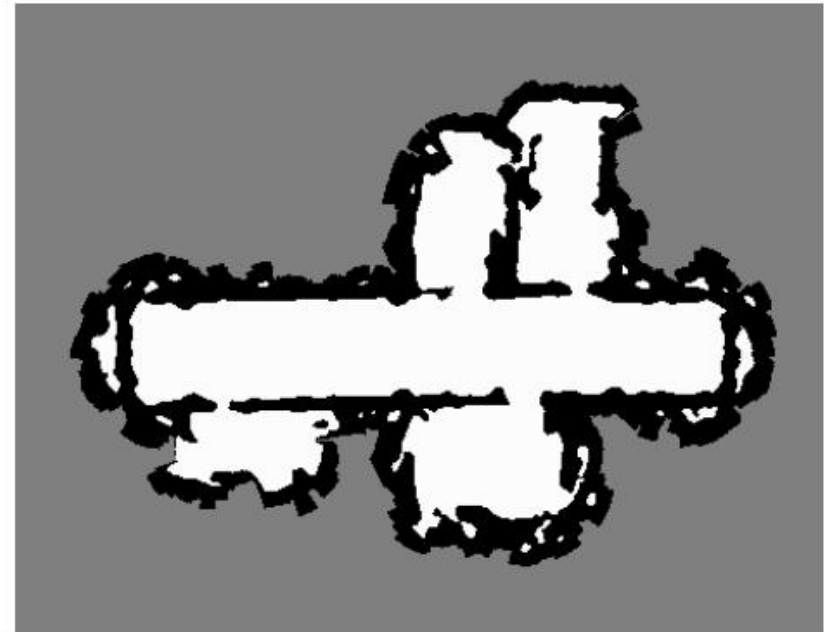


The maximum likelihood map is obtained by clipping the occupancy grid map at a threshold of 0.5


# Occupancy Grids: From scans to maps

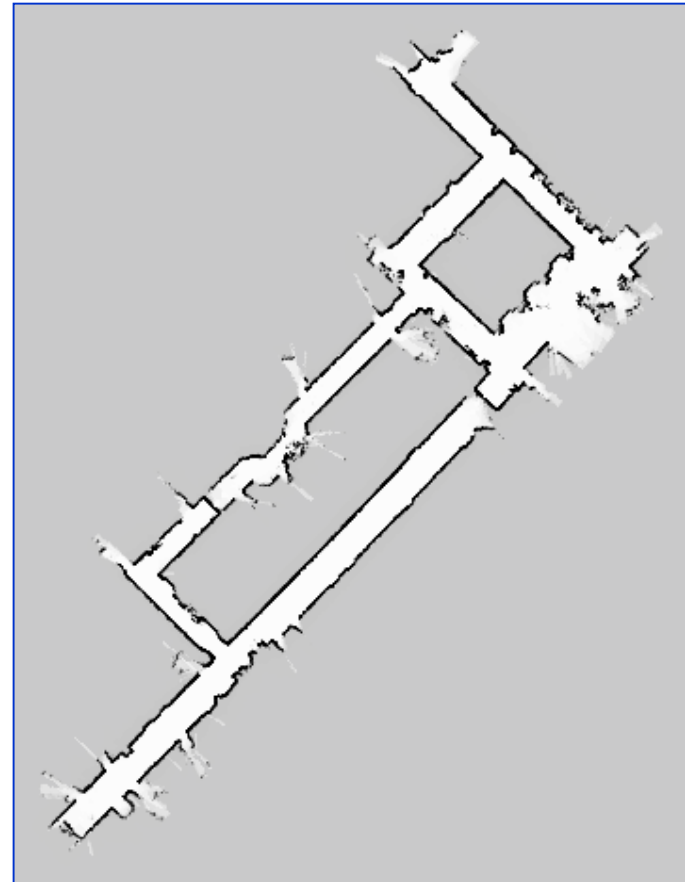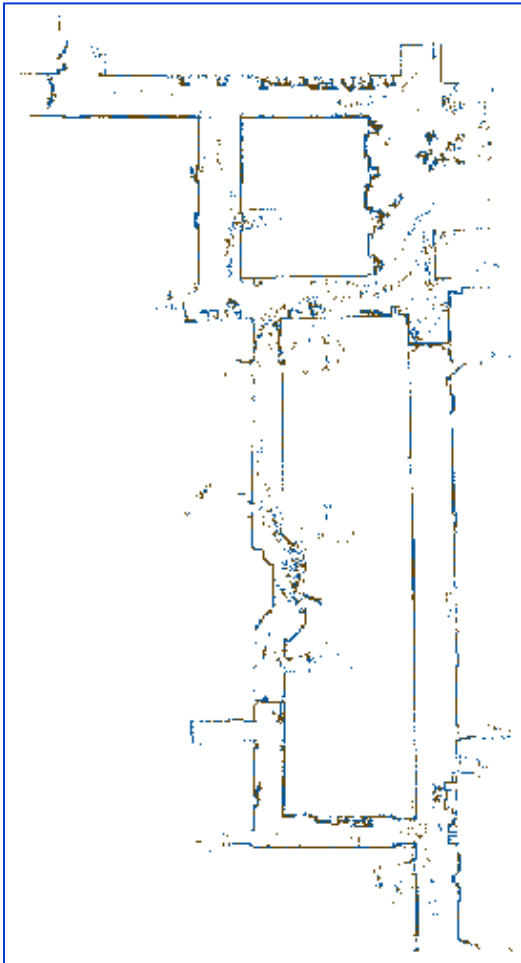

# Tech Museum, San Jose

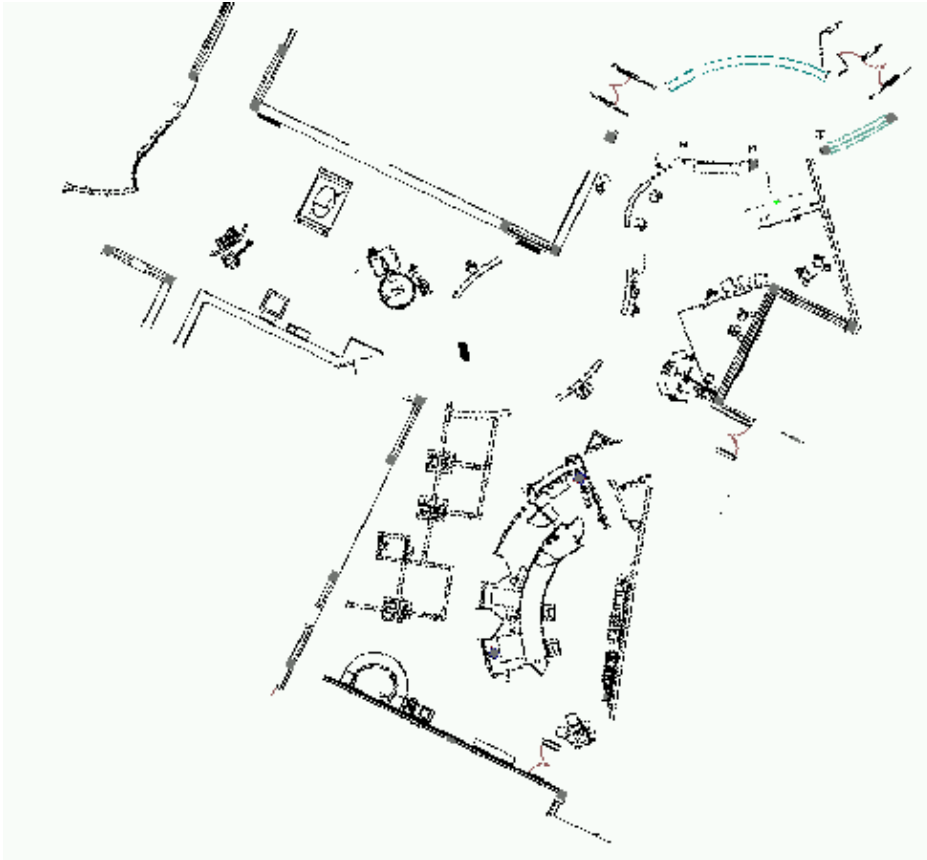

**CAD map**

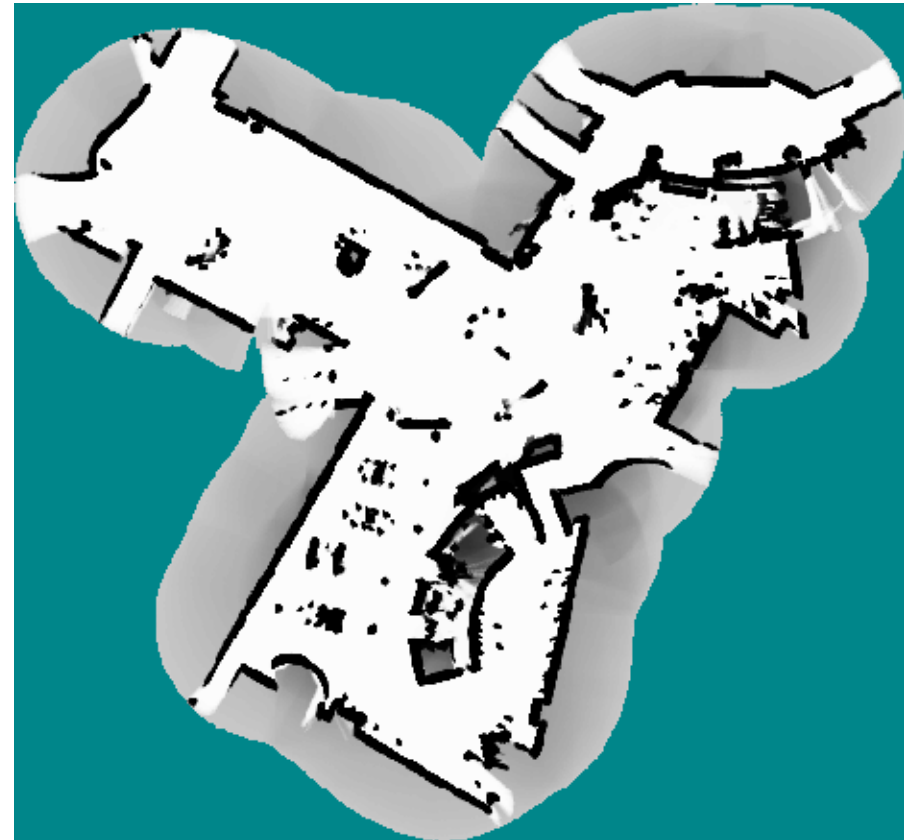

**occupancy grid map**

# Alternative: Simple Counting

- For every cell count
  - $hits(x,y)$ : number of cases where a beam ended at  $\langle x,y \rangle$
  - $misses(x,y)$ : number of cases where a beam passed through  $\langle x,y \rangle$

$$Bel(m^{[xy]}) = \frac{hits(x, y)}{hits(x, y) + misses(x, y)}$$

- Value of interest:  $P(reflects(x,y))$

# The Measurement Model


1. pose at time  $t$ :
2. beam  $n$  of scan  $t$ :
3. maximum range reading:
4. beam reflected by an object:

$x_t$

$z_{t,n}$

$\zeta_{t,n} = 1$

$\zeta_{t,n} = 0$

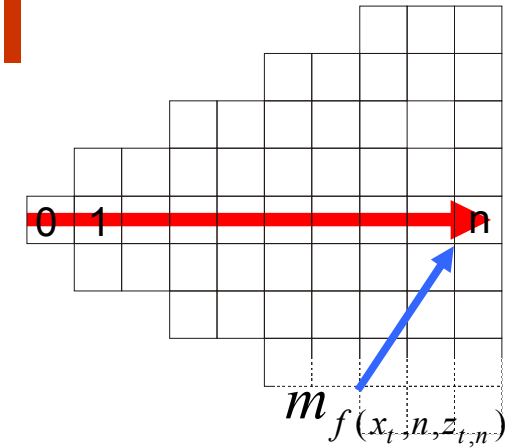

$$p(z_{t,n} | x_t, m) = \begin{cases} \prod_{k=0}^{z_{t,n}-1} (1 - m_{f(x_t, n, k)}) & \text{if } \zeta_{t,n} = 1 \\ m_{f(x_t, n, z_{t,n})} \prod_{k=0}^{z_{t,n}-1} (1 - m_{f(x_t, n, k)}) & \text{if } \zeta_{t,n} = 0 \end{cases}$$

# Computing the Most Likely Map

- Compute values for  $m$  that maximize

$$m^* = \arg \max_m P(m \mid z_1, \dots, z_t, x_1, \dots, x_t)$$

- Assuming a uniform prior probability for  $p(m)$ , this is equivalent to maximizing (applic. of Bayes rule)

$$m^* = \arg \max_m P(z_1, \dots, z_t \mid m, x_1, \dots, x_t)$$

$$= \arg \max_m \prod_{t=1}^T P(z_t \mid m, x_t)$$

$$= \arg \max_m \sum_{t=1}^T \ln P(z_t \mid m, x_t)$$

# Computing the Most Likely Map

$$m^* = \arg \max_m \left[ \sum_{j=1}^J \sum_{t=1}^T \sum_{n=1}^N \left( I(f(x_t, n, z_{t,n}) = j) \cdot (1 - \zeta_{t,n}) \cdot \ln m_j \right. \right. \\ \left. \left. + \sum_{k=0}^{z_{t,n}-1} I(f(x_t, n, k) = j) \cdot \ln (1 - m_j) \right) \right]$$

Suppose

$$\alpha_j = \sum_{t=1}^T \sum_{n=1}^N I(f(x_t, n, z_{t,n}) = j) \cdot (1 - \zeta_{t,n})$$

$$\beta_j = \sum_{t=1}^T \sum_{n=1}^N \left[ \sum_{k=0}^{z_{t,n}-1} I(f(x_t, n, k) = j) \right]$$



# Meaning of $\alpha_j$ and $\beta_j$

$$\alpha_j = \sum_{t=1}^T \sum_{n=1}^N I(f(x_t, n, z_{t,n}) = j) \cdot (1 - \zeta_{t,n})$$

corresponds to the number of times a beam that is not a maximum range beam ended in cell  $j$  (*hits(j)*)

$$\beta_j = \sum_{t=1}^T \sum_{n=1}^N \left[ \sum_{k=0}^{z_{t,n}-1} I(f(x_t, n, k) = j) \right]$$

corresponds to the number of times a beam intercepted cell  $j$  without ending in it (*misses(j)*).

# Computing the Most Likely Map

We assume that all cells  $m_j$  are independent:

$$m^* = \arg \max_m \left( \sum_{j=1}^J \alpha_j \ln m_j + \beta_j \ln(1 - m_j) \right)$$

If we set

we obtain

$$\frac{\partial m}{\partial m_j} = \frac{\alpha_j}{m_j} - \frac{\beta_j}{1 - m_j} = 0$$

$$m_j = \frac{\alpha_j}{\alpha_j + \beta_j}$$

Computing the most likely map amounts to counting how often a cell has reflected a measurement and how often it was intercepted.

# Difference between Occupancy Grid Maps and Counting

- The counting model determines how often a cell reflects a beam.
- The occupancy model represents whether or not a cell is occupied by an object.
- Although a cell might be occupied by an object, the reflection probability of this object might be very small.

# Example Occupancy Map



# Example Reflection Map

glass panes



# Example

- Out of 1000 beams only 60% are reflected from a cell and 40% intercept it without ending in it.
- Accordingly, the reflection probability will be 0.6.
- Suppose  $p(occ | z) = 0.55$  when a beam ends in a cell and  $p(occ | z) = 0.45$  when a cell is intercepted by a beam that does not end in it.
- Accordingly, after  $n$  measurements we will have

$$\left(\frac{0.55}{0.45}\right)^{n*0.6} * \left(\frac{0.45}{0.55}\right)^{n*0.4} = \left(\frac{11}{9}\right)^{n*0.6} * \left(\frac{11}{9}\right)^{-n*0.4} = \left(\frac{11}{9}\right)^{n*0.2}$$

- Whereas the reflection map yields a value of 0.6, the occupancy grid value converges to 1.

# Summary

- Occupancy grid maps are a popular approach to represent the environment of a mobile robot given known poses.
- In this approach each cell is considered independently from all others.
- It stores the posterior probability that the corresponding area in the environment is occupied.
- Occupancy grid maps can be learned efficiently using a probabilistic approach.
- Reflection maps are an alternative representation.
- They store in each cell the probability that a beam is reflected by this cell.
- We provided a sensor model for computing the likelihood of measurements and showed that the counting procedure underlying reflection maps yield the optimal map.