

# **Introduction to Mobile Robotics**

## **Bayes Filter – Extended Kalman Filter**

Wolfram Burgard, Michael Ruhnke, Bastian  
Steder



# Bayes Filter Reminder

$$bel(x_t) = \eta p(z_t | x_t) \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Prediction

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Correction

$$bel(x_t) = \eta p(z_t | x_t) \overline{bel}(x_t)$$

# Discrete Kalman Filter

Estimates the state  $x$  of a discrete-time controlled process

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

with a measurement

$$z_t = C_t x_t + \delta_t$$

# Components of a Kalman Filter

$A_t$

Matrix ( $n \times n$ ) that describes how the state evolves from  $t-1$  to  $t$  without controls or noise.

$B_t$

Matrix ( $n \times l$ ) that describes how the control  $u_t$  changes the state from  $t-1$  to  $t$ .

$C_t$




Matrix ( $k \times n$ ) that describes how to map the state  $x_t$  to an observation  $z_t$ .

$\varepsilon_t$

Random variables representing the process and measurement noise that are assumed to be independent and normally distributed with covariance  $Q_t$  and  $R_t$ , respectively.





$\delta_t$

# Kalman Filter Update Example

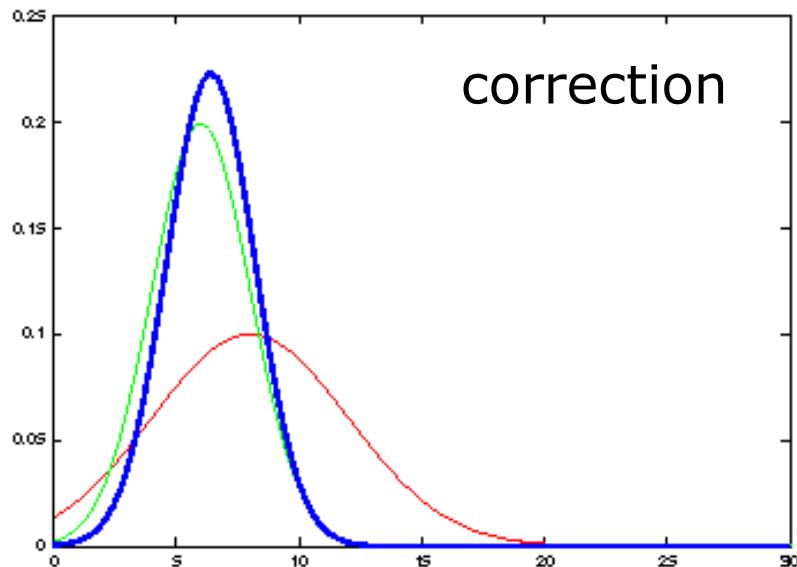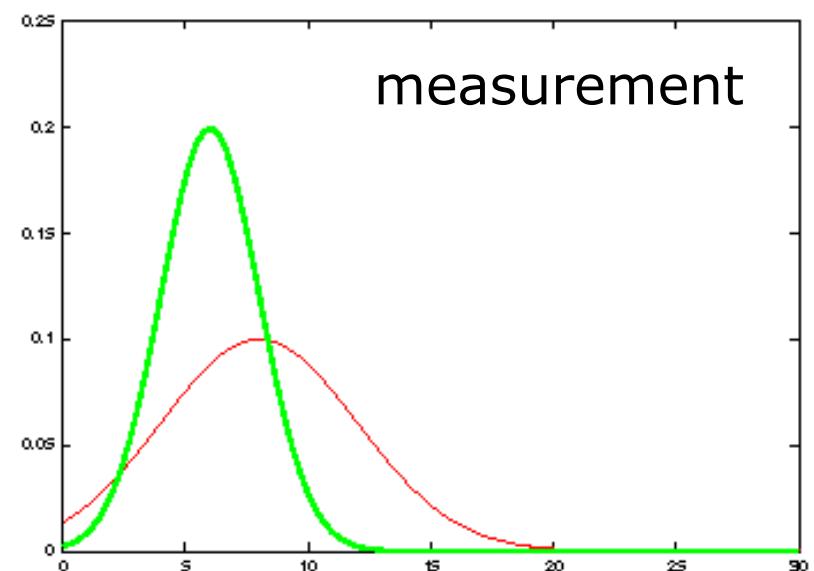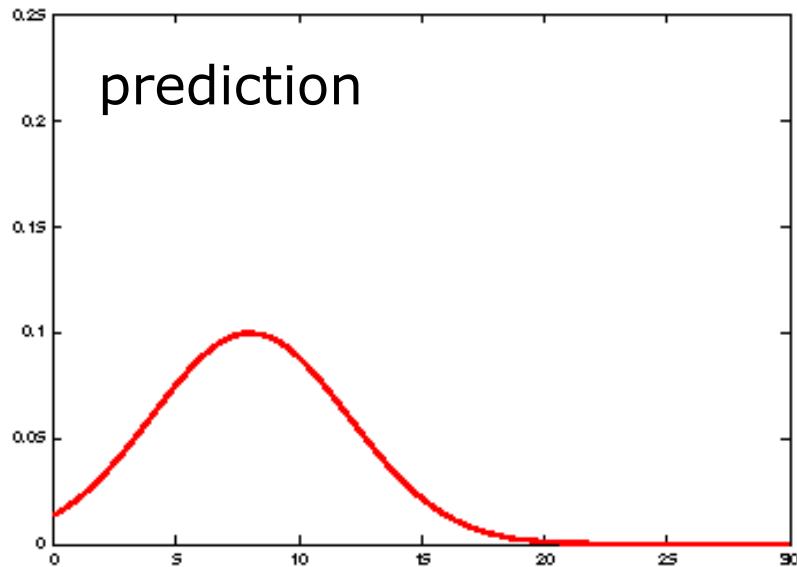

It's a weighted mean!

# Kalman Filter Update Example

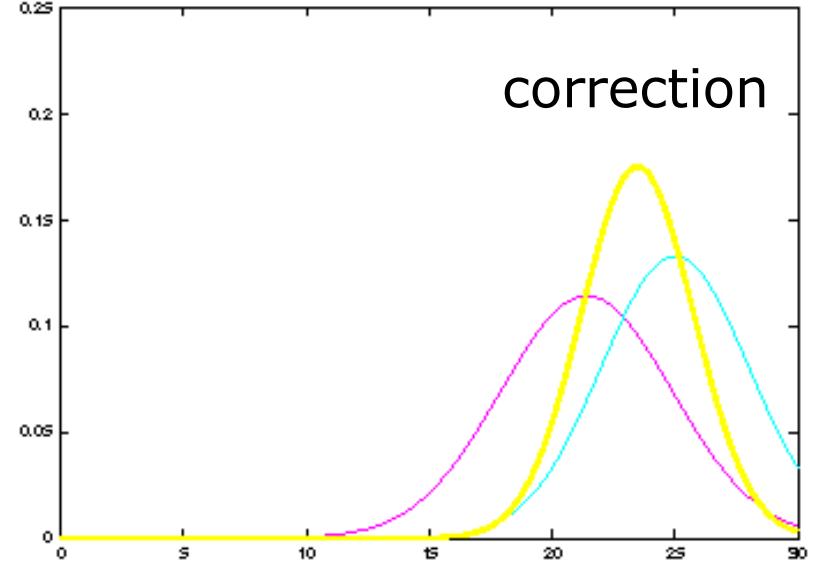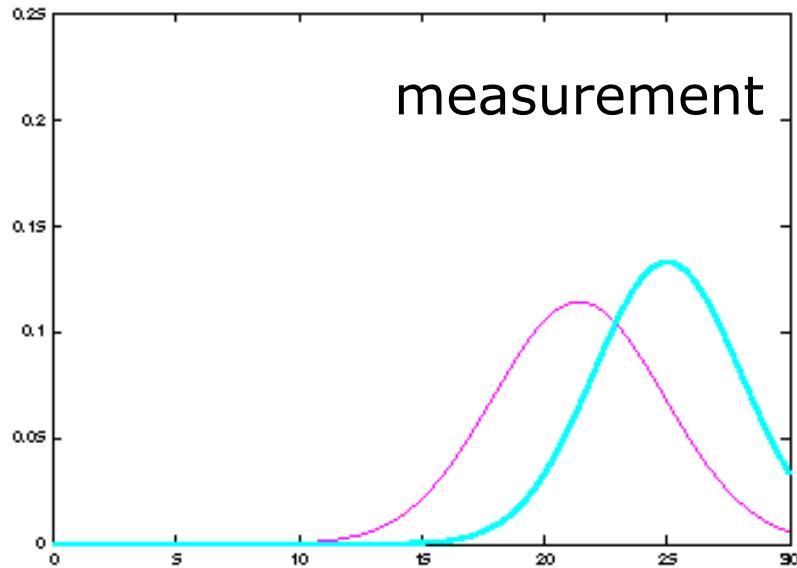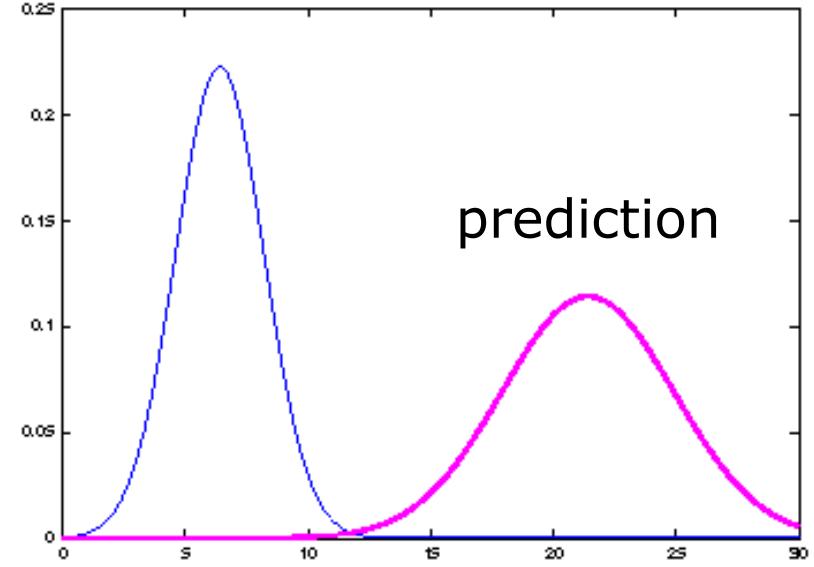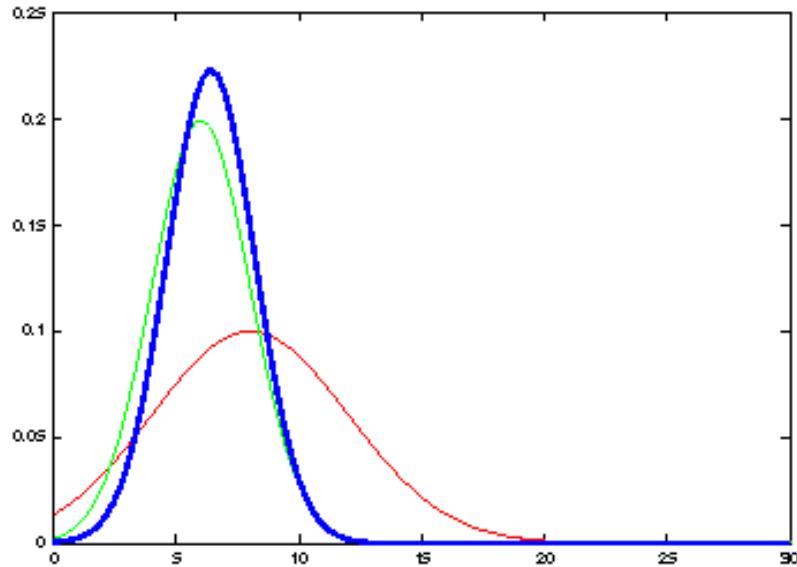

# Kalman Filter Algorithm

1. Algorithm **Kalman\_filter**(  $\underline{\mu}_{t-1}$ ,  $\Sigma_{t-1}$ ,  $u_t$ ,  $z_t$ ):

2. Prediction:

$$3. \quad \underline{\mu}_t = \underline{A}_t \underline{\mu}_{t-1} + \underline{B}_t u_t$$

$$4. \quad \Sigma_t = \underline{A}_t \Sigma_{t-1} \underline{A}_t^T + \underline{Q}_t$$

5. Correction:

$$6. \quad K_t = \underline{\Sigma}_t \underline{C}_t^T (\underline{C}_t \underline{\Sigma}_t \underline{C}_t^T + \underline{R}_t)^{-1}$$

$$7. \quad \mu_t = \underline{\mu}_t + K_t (z_t - \underline{C}_t \underline{\mu}_t)$$

$$8. \quad \Sigma_t = (I - K_t \underline{C}_t) \Sigma_t$$

9. Return  $\mu_t$ ,  $\Sigma_t$

# Nonlinear Dynamic Systems

- Most realistic robotic problems involve nonlinear functions

$$\cancel{x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t}$$




$$\cancel{z_t = C_t x_t + \delta_t}$$






$$x_t = g(u_t, x_{t-1})$$

$$z_t = h(x_t)$$

# Linearity Assumption Revisited

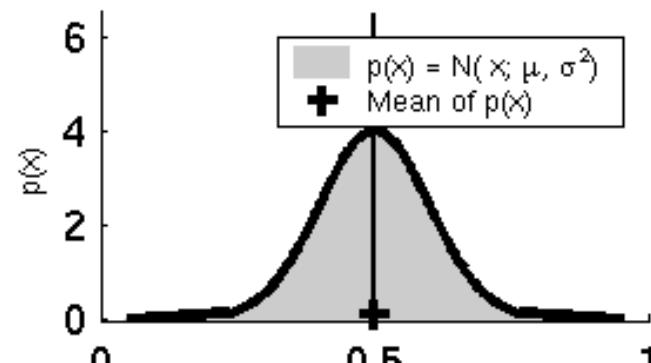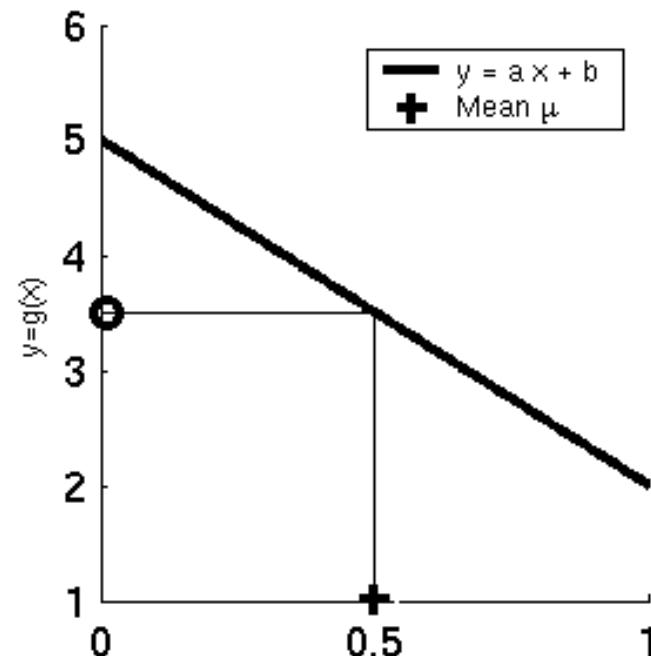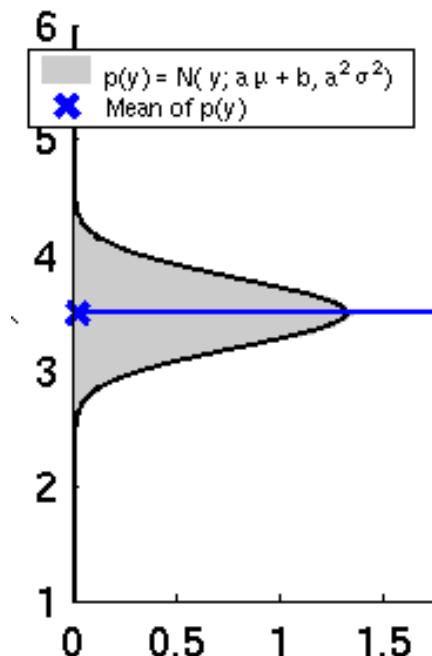

# Non-Linear Function

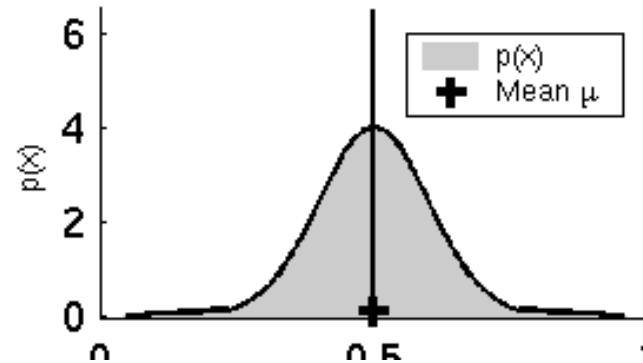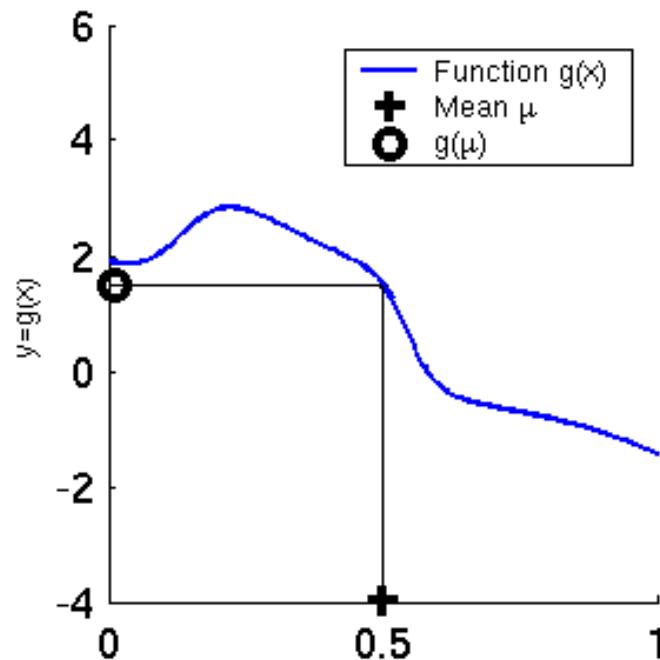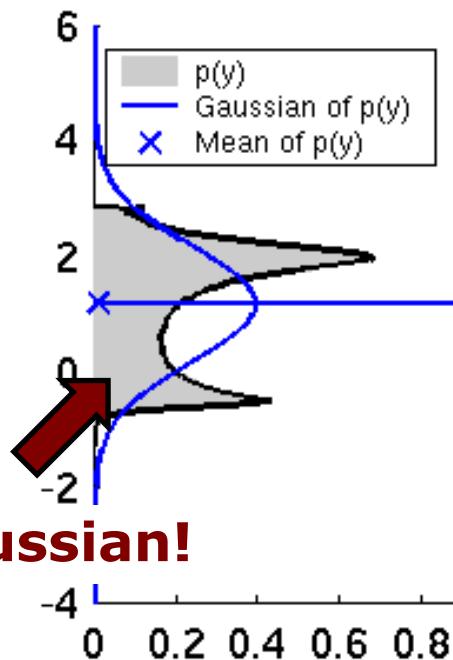

# Non-Gaussian Distributions

- The non-linear functions lead to non-Gaussian distributions
- Kalman filter is not applicable anymore!

**What can be done to resolve this?**

# **Non-Gaussian Distributions**

- The non-linear functions lead to non-Gaussian distributions
- Kalman filter is not applicable anymore!

**What can be done to resolve this?**

**Local linearization!**

# EKF Linearization: First Order Taylor Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$

- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$

$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

Jacobian matrices

# Reminder: Jacobian Matrix

- It is a **non-square matrix**  $n \times m$  in general
- Given a vector-valued function



$$f(\mathbf{x}) = \begin{bmatrix} f_1(\mathbf{x}) \\ f_2(\mathbf{x}) \\ \vdots \\ f_m(\mathbf{x}) \end{bmatrix}$$

- The **Jacobian matrix** is defined as

$$\mathbf{F}_{\mathbf{x}} = \begin{bmatrix} \frac{\partial f_1}{\partial x_1} & \frac{\partial f_1}{\partial x_2} & \cdots & \frac{\partial f_1}{\partial x_n} \\ \frac{\partial f_2}{\partial x_1} & \frac{\partial f_2}{\partial x_2} & \cdots & \frac{\partial f_2}{\partial x_n} \\ \vdots & \vdots & \ddots & \vdots \\ \frac{\partial f_m}{\partial x_1} & \frac{\partial f_m}{\partial x_2} & \cdots & \frac{\partial f_m}{\partial x_n} \end{bmatrix}$$

# Reminder: Jacobian Matrix

- It is the orientation of the tangent plane to the vector-valued function at a given point

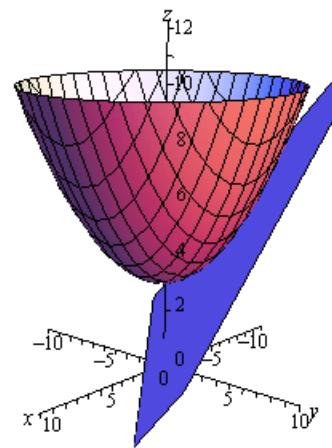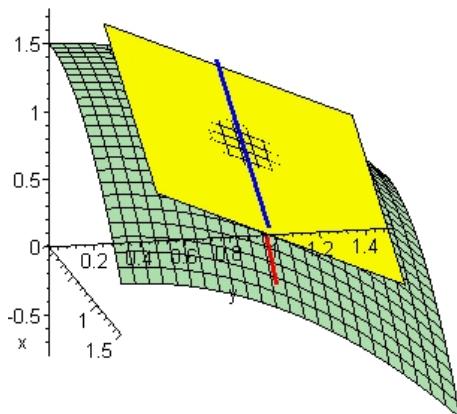

- Generalizes the gradient of a scalar valued function

# EKF Linearization: First Order Taylor Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$




- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$




$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

Linear function!




# Linearity Assumption Revisited

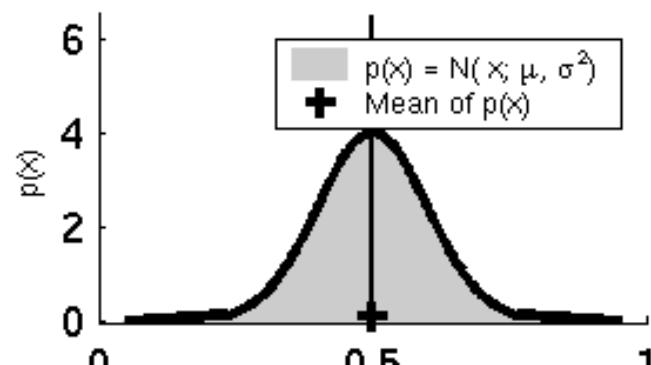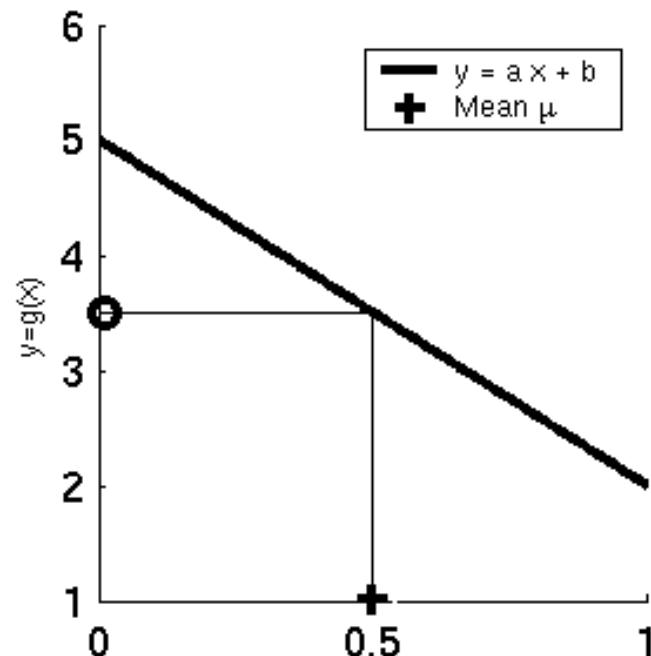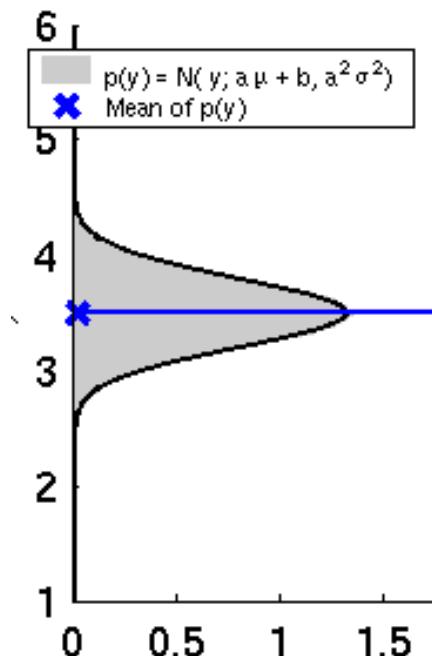




# Non-Linear Function

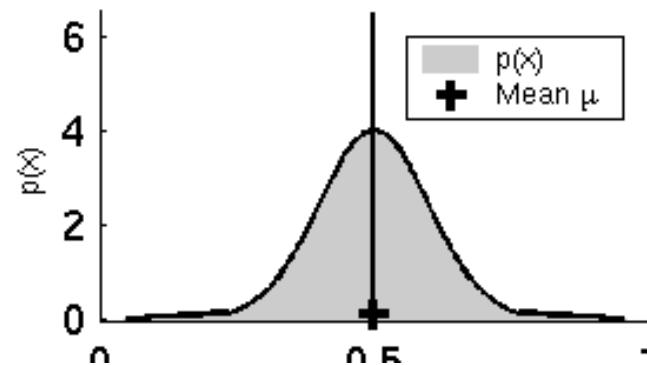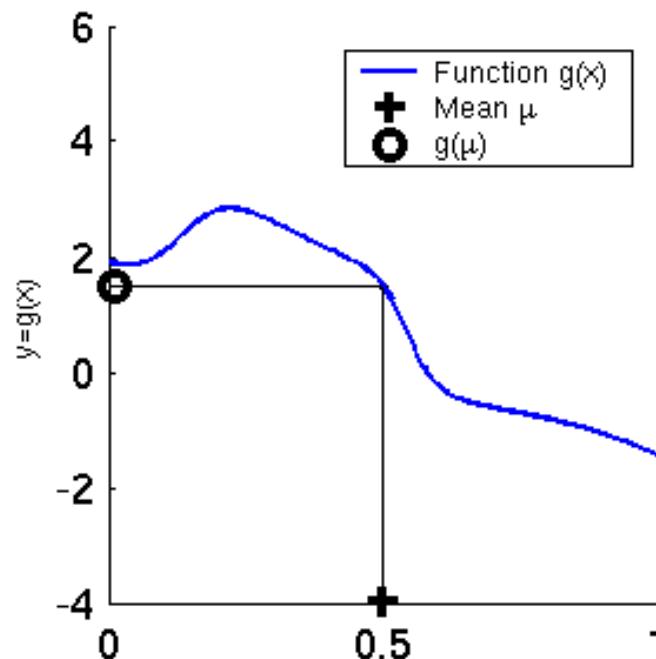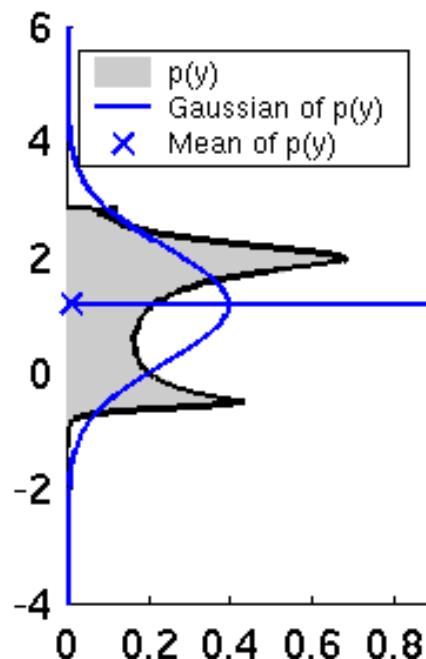




# EKF Linearization (1)

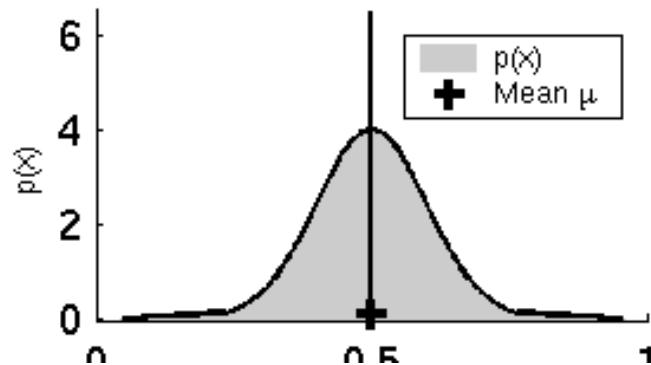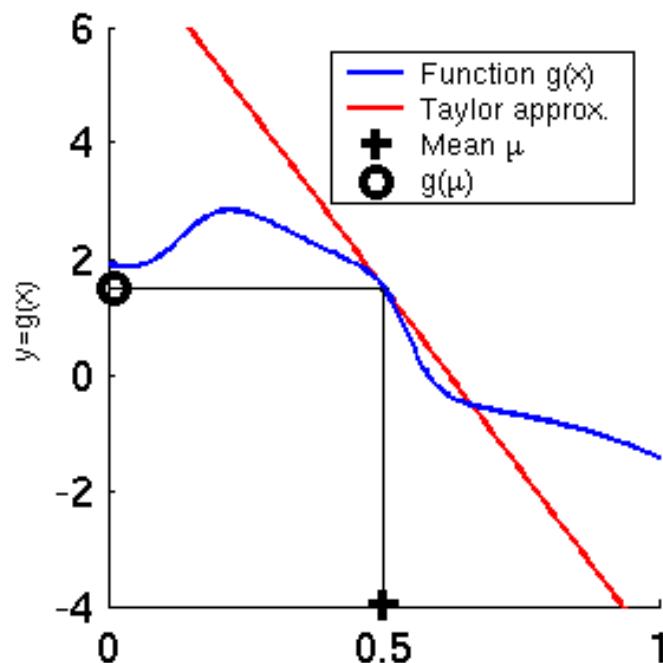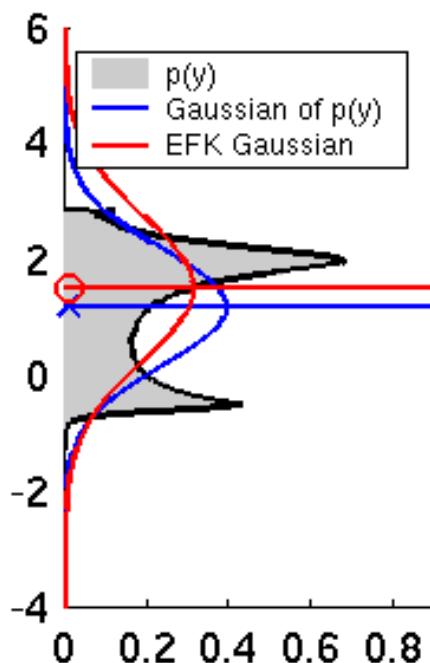

# EKF Linearization (2)

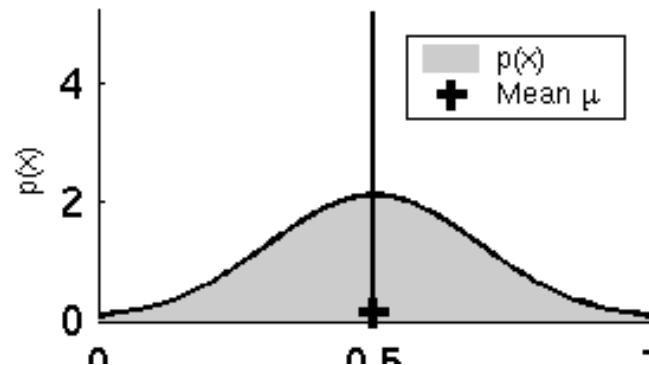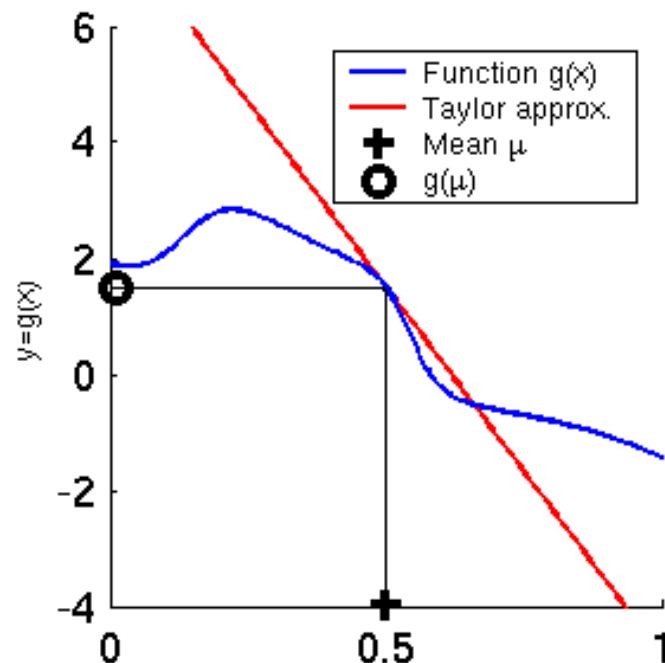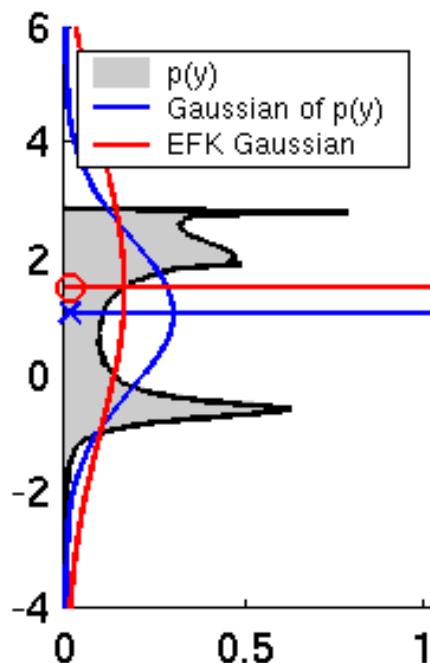

# EKF Linearization (3)

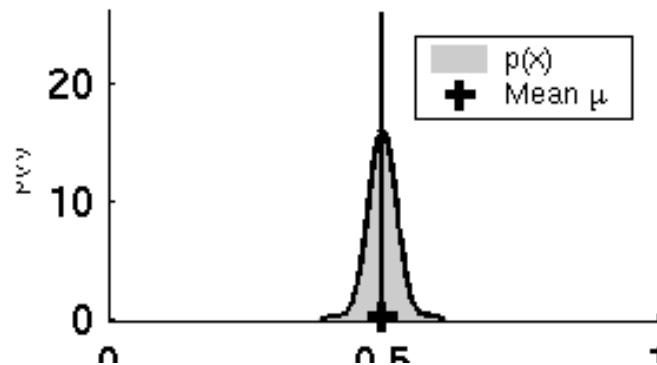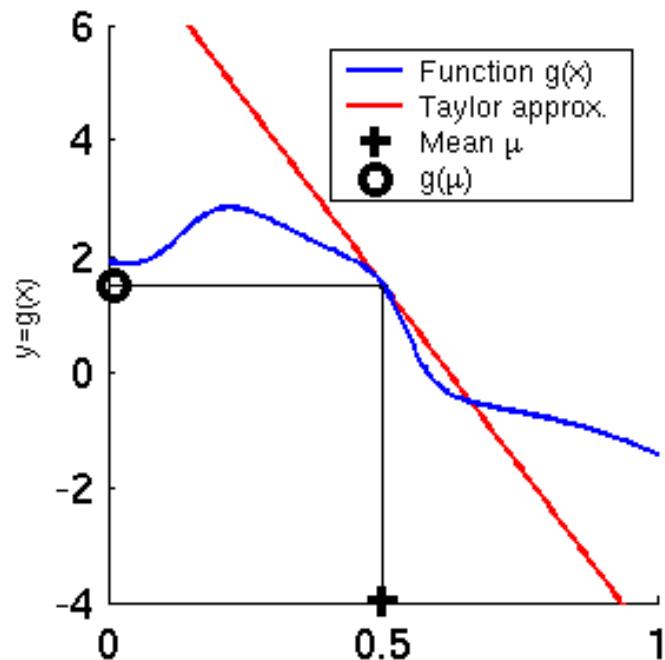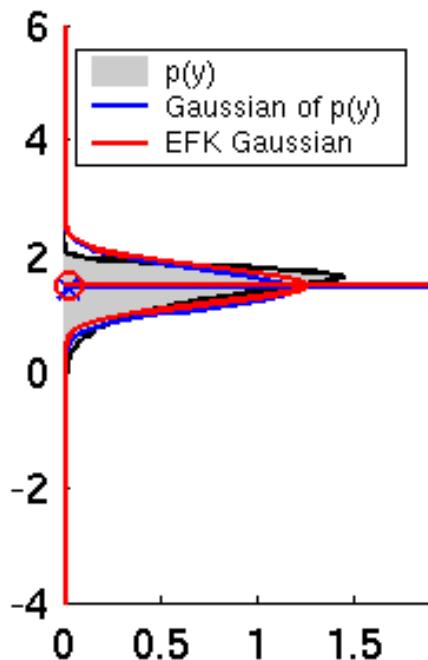

# EKF Algorithm

1. **Extended\_Kalman\_filter**(  $\mu_{t-1}$ ,  $\Sigma_{t-1}$ ,  $u_t$ ,  $z_t$ ):

2. Prediction:

$$3. \bar{\mu}_t = g(u_t, \mu_{t-1})$$

$$\bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$$

$$4. \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + Q_t$$

$$\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + Q_t$$

5. Correction:

$$6. K_t = \bar{\Sigma}_t H_t^T (H_t \bar{\Sigma}_t H_t^T + R_t)^{-1}$$

$$K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + R_t)^{-1}$$

$$7. \mu_t = \bar{\mu}_t + K_t (z_t - h(\bar{\mu}_t))$$

$$\mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t)$$

$$8. \bar{\Sigma}_t = (I - K_t H_t) \bar{\Sigma}_t$$

$$\bar{\Sigma}_t = (I - K_t C_t) \bar{\Sigma}_t$$

9. Return  $\mu_t$ ,  $\Sigma_t$

$$H_t = \frac{\partial h(\bar{\mu}_t)}{\partial x_t}$$

$$G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}}$$

# Example: EKF Localization

- EKF localization with landmarks (point features)



# 1. EKF\_localization ( $\mu_{t-1}$ , $\Sigma_{t-1}$ , $u_t$ , $z_t$ , $m$ ):

**Prediction:**

$$3. \quad G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial \mu_{t-1}} = \begin{pmatrix} \frac{\partial x'}{\partial \mu_{t-1,x}} & \frac{\partial x'}{\partial \mu_{t-1,y}} & \frac{\partial x'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial y'}{\partial \mu_{t-1,x}} & \frac{\partial y'}{\partial \mu_{t-1,y}} & \frac{\partial y'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial \theta'}{\partial \mu_{t-1,x}} & \frac{\partial \theta'}{\partial \mu_{t-1,y}} & \frac{\partial \theta'}{\partial \mu_{t-1,\theta}} \end{pmatrix}$$

Jacobian of  $g$  w.r.t location

$$5. \quad V_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial u_t} = \begin{pmatrix} \frac{\partial x'}{\partial v_t} & \frac{\partial x'}{\partial \omega_t} \\ \frac{\partial y'}{\partial v_t} & \frac{\partial y'}{\partial \omega_t} \\ \frac{\partial \theta'}{\partial v_t} & \frac{\partial \theta'}{\partial \omega_t} \end{pmatrix}$$

Jacobian of  $g$  w.r.t control

$$1. \quad Q_t = \begin{pmatrix} (\alpha_1 |v_t| + \alpha_2 |\omega_t|)^2 & 0 \\ 0 & (\alpha_3 |v_t| + \alpha_4 |\omega_t|)^2 \end{pmatrix}$$

Motion noise

$$2. \quad \bar{\mu}_t = g(u_t, \mu_{t-1})$$

Predicted mean

$$3. \quad \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t Q_t V_t^T$$

Predicted covariance ( $V$  maps  $Q$  into state space)

# 1. EKF\_localization ( $\mu_{t-1}$ , $\Sigma_{t-1}$ , $u_t$ , $z_t$ , $m$ ):

## Correction:

$$3. \hat{z}_t = \begin{pmatrix} \sqrt{(m_x - \bar{\mu}_{t,x})^2 + (m_y - \bar{\mu}_{t,y})^2} \\ \text{atan } 2(m_y - \bar{\mu}_{t,y}, m_x - \bar{\mu}_{t,x}) - \bar{\mu}_{t,\theta} \end{pmatrix}$$

Predicted measurement mean  
(depends on observation type)

$$5. H_t = \frac{\partial h(\bar{\mu}_t, m)}{\partial x_t} = \begin{pmatrix} \frac{\partial r_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,\theta}} \end{pmatrix}$$

Jacobian of  $h$  w.r.t location

$$6. R_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_r^2 \end{pmatrix}$$

$$7. S_t = H_t \bar{\Sigma}_t H_t^T + R_t$$

Innovation covariance

$$8. K_t = \bar{\Sigma}_t H_t^T S_t^{-1}$$

Kalman gain





$$9. \mu_t = \bar{\mu}_t + K_t (z_t - \hat{z}_t)$$

Updated mean





$$10. \Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$$

Updated covariance





# EKF Prediction Step Examples

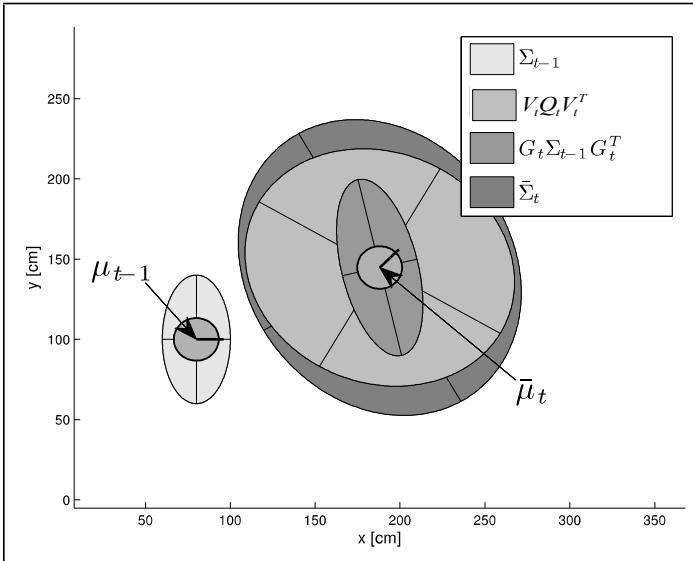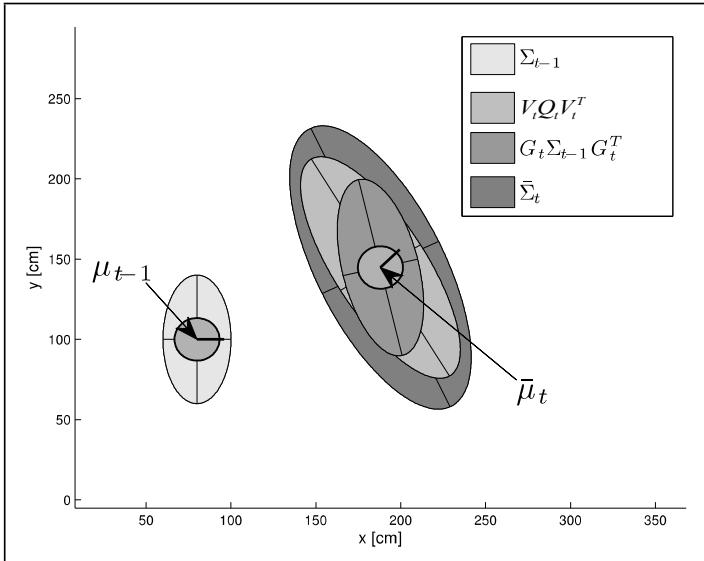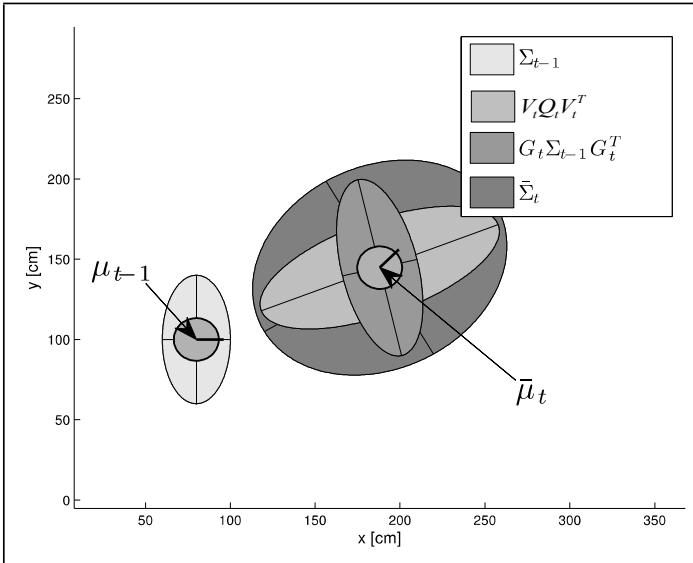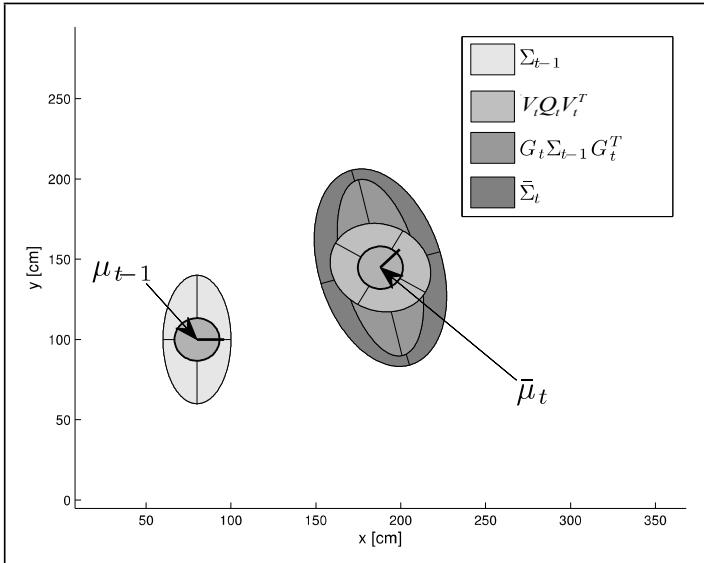



# EKF Observation Prediction Step

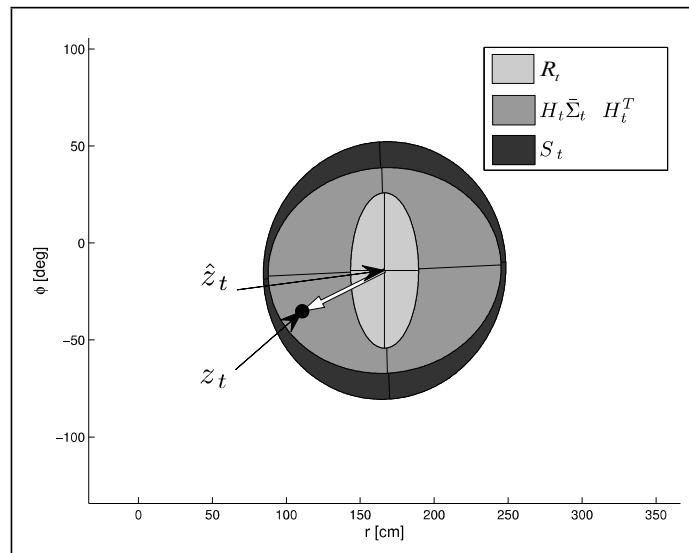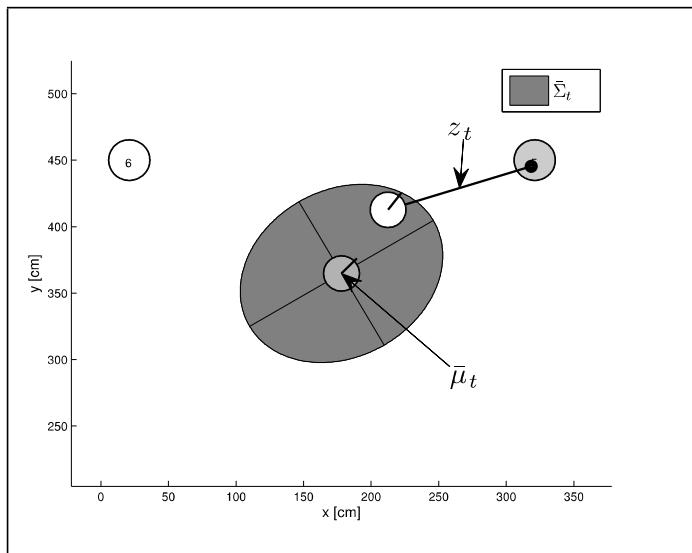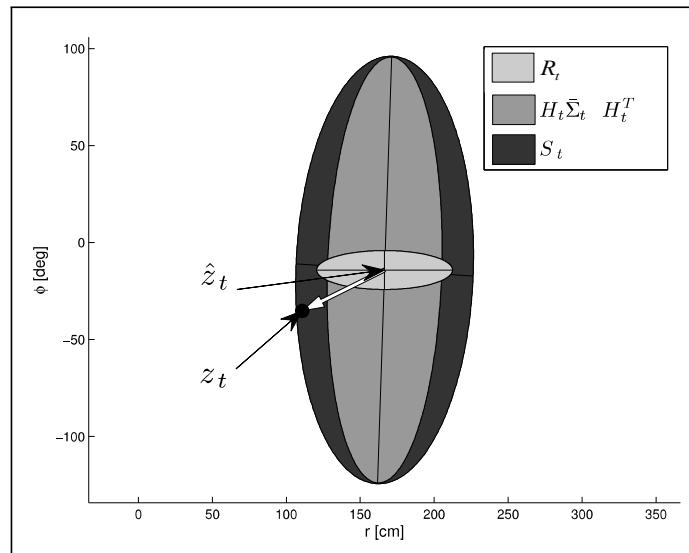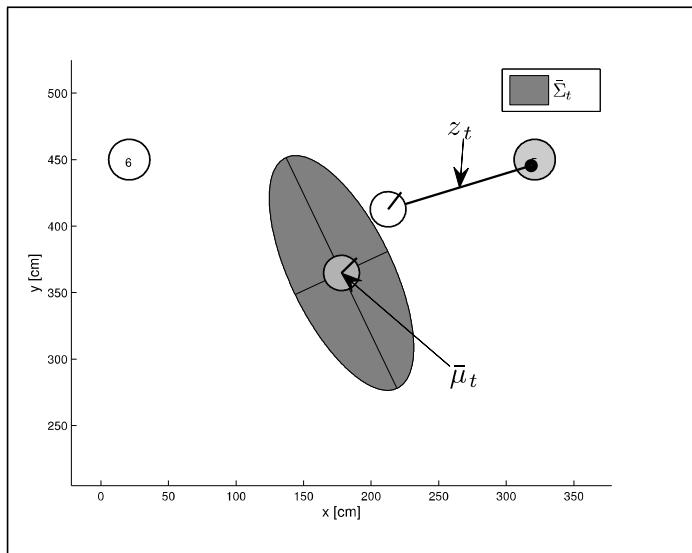



# EKF Correction Step

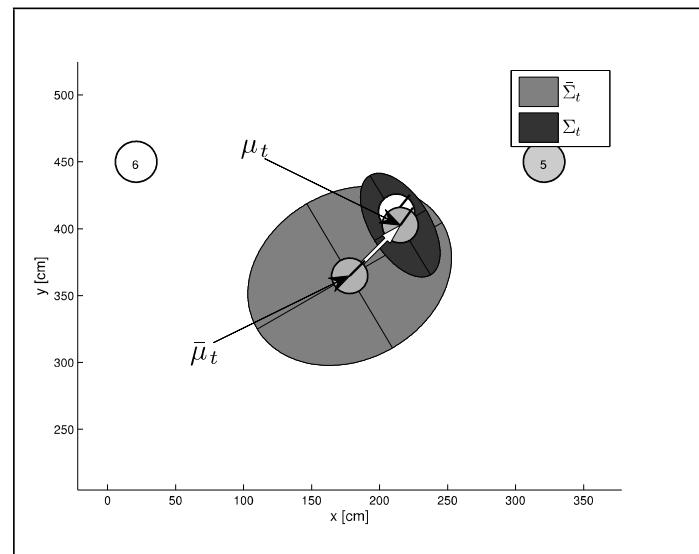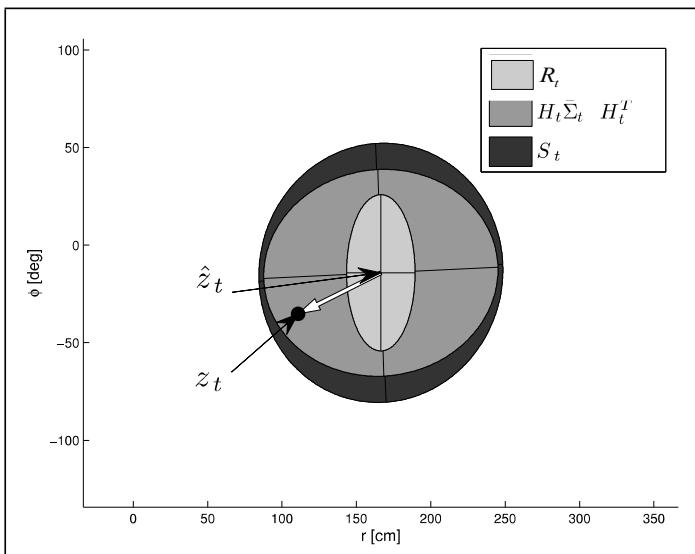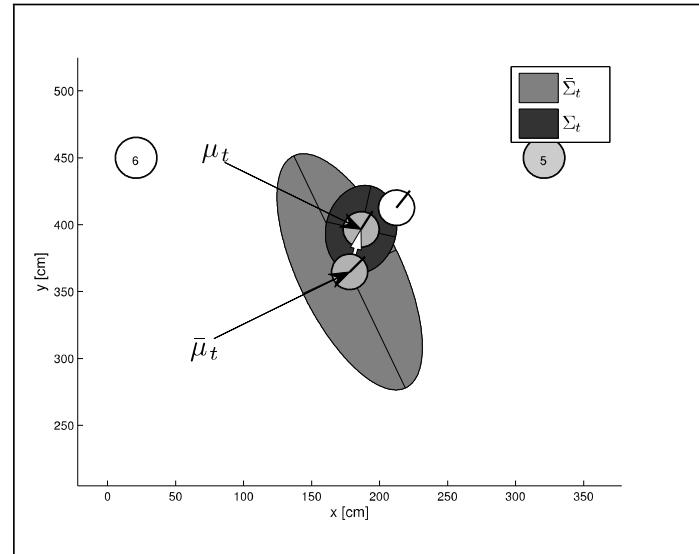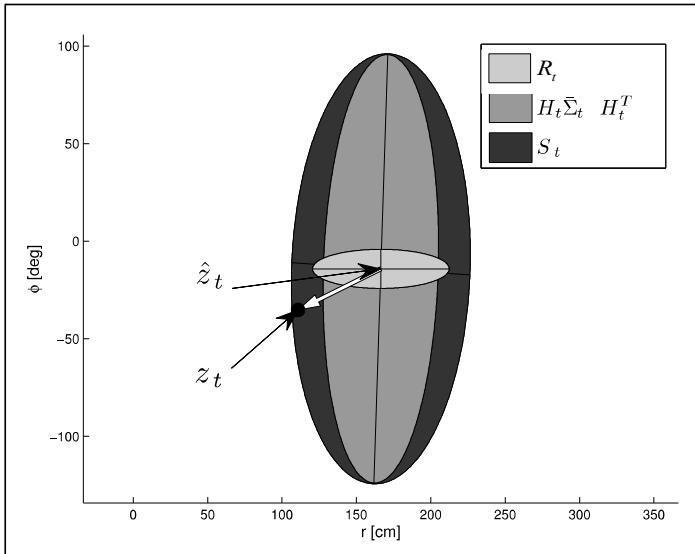

# Estimation Sequence (1)

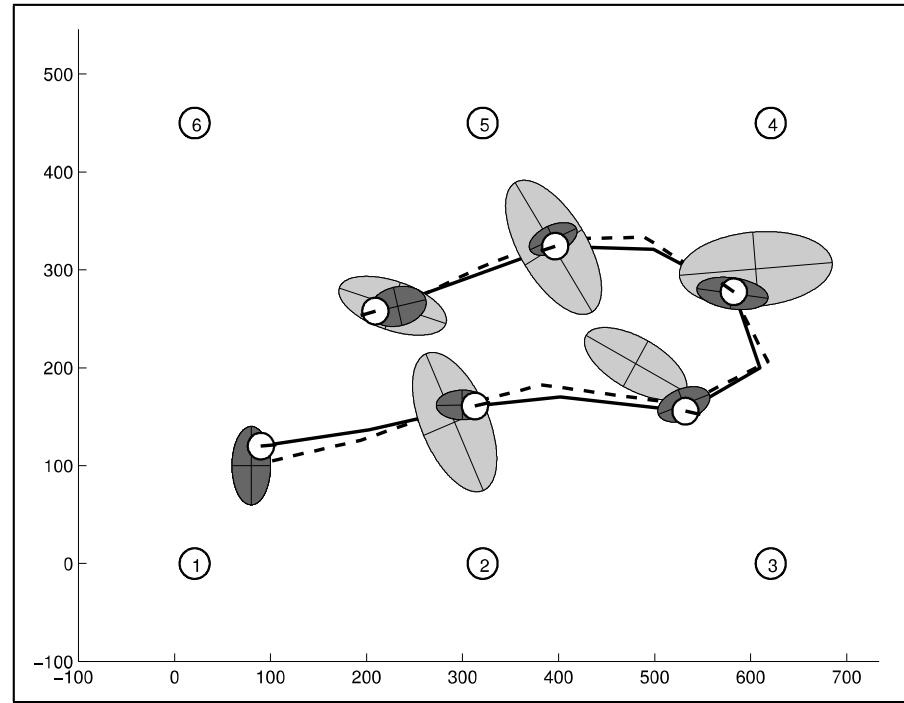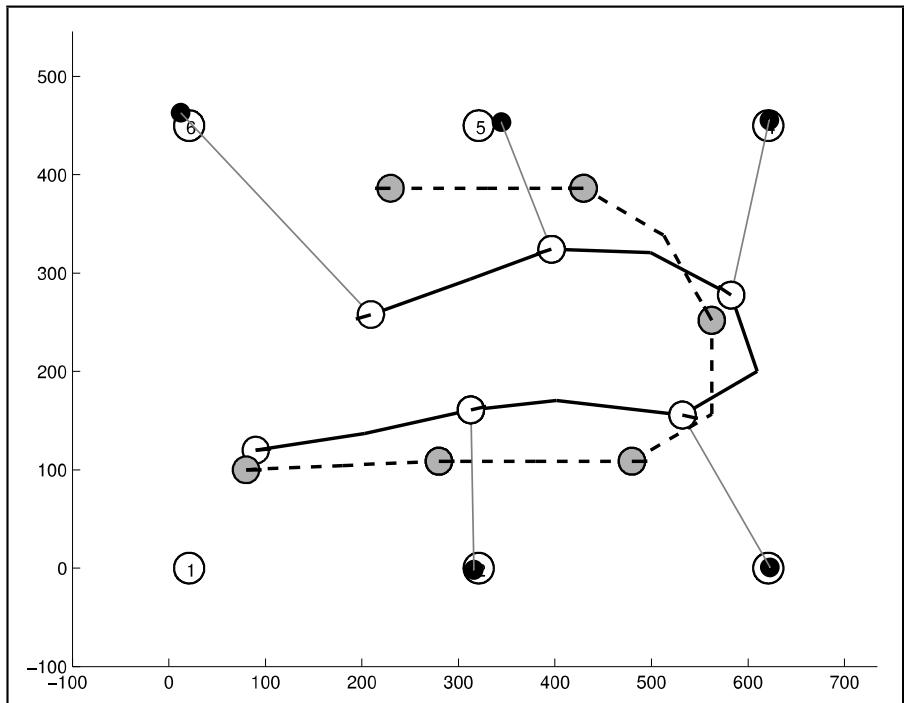

# Estimation Sequence (2)

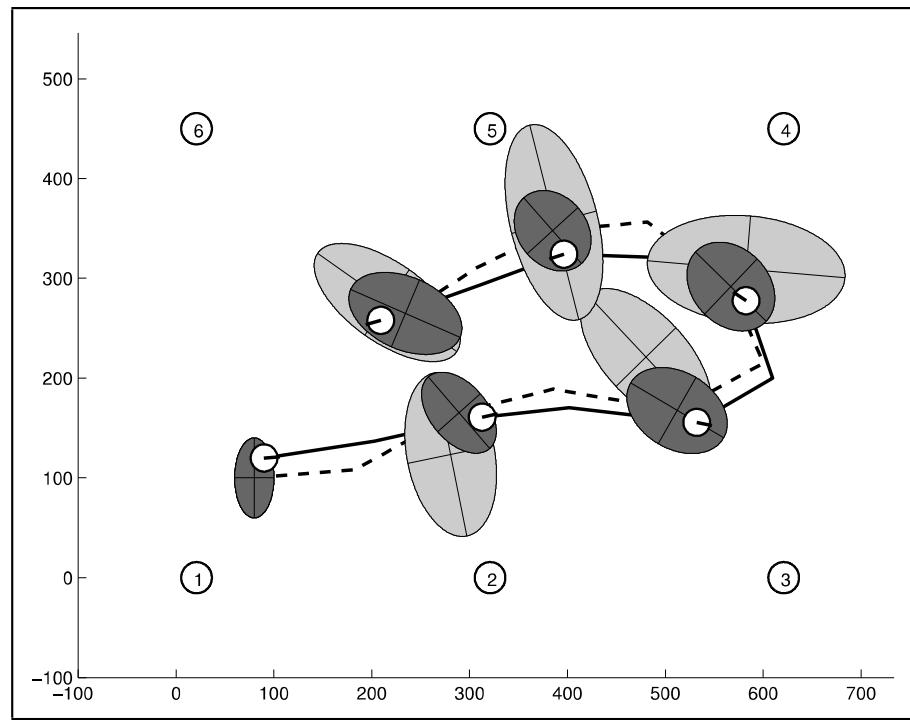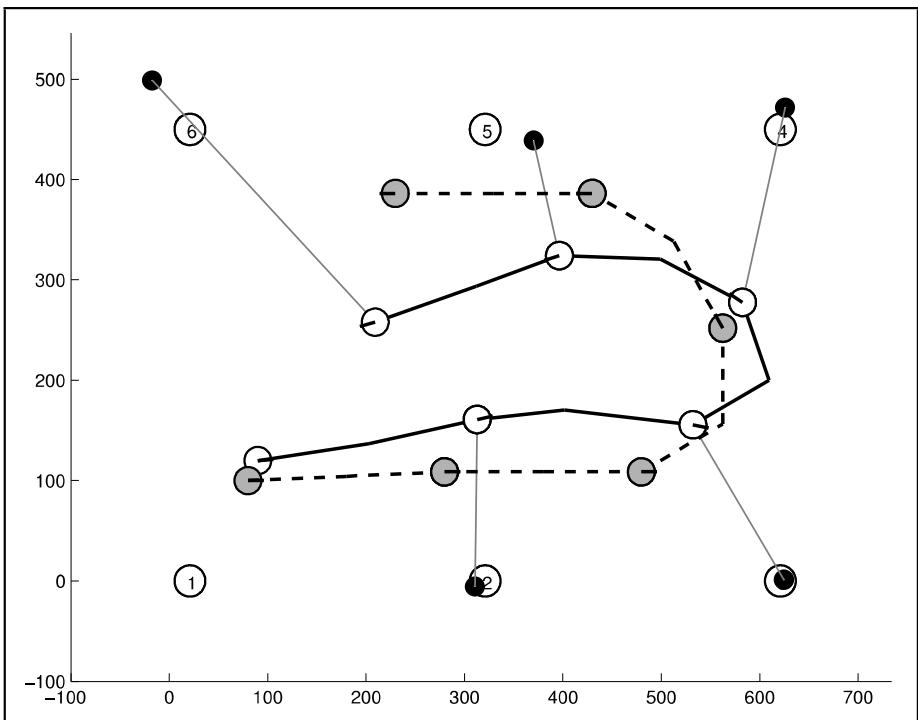

# Extended Kalman Filter Summary

- Ad-hoc solution to deal with non-linearities
- Performs local linearization in each step
- Works well in practice for moderate non-linearities
- Example: landmark localization
- There exist better ways for dealing with non-linearities such as the unscented Kalman filter called UKF