

Introduction to Mobile Robotics

Bayes Filter – Extended Kalman Filter

Wolfram Burgard, Maren Bennewitz,
Diego Tipaldi, Luciano Spinello



Bayes Filter Reminder

$$bel(x_t) = \eta p(z_t | x_t) \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Prediction

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Correction

$$bel(x_t) = \eta p(z_t | x_t) \overline{bel}(x_t)$$

Discrete Kalman Filter

Estimates the state x of a discrete-time controlled process

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

with a measurement

$$z_t = C_t x_t + \delta_t$$

Components of a Kalman Filter

A_t

Matrix ($n \times n$) that describes how the state evolves from $t-1$ to t without controls or noise.

B_t

Matrix ($n \times l$) that describes how the control u_t changes the state from $t-1$ to t .

C_t




Matrix ($k \times n$) that describes how to map the state x_t to an observation z_t .

ε_t

Random variables representing the process and measurement noise that are assumed to be independent and normally distributed with covariance Q_t and R_t respectively.





δ_t

Kalman Filter Update Example

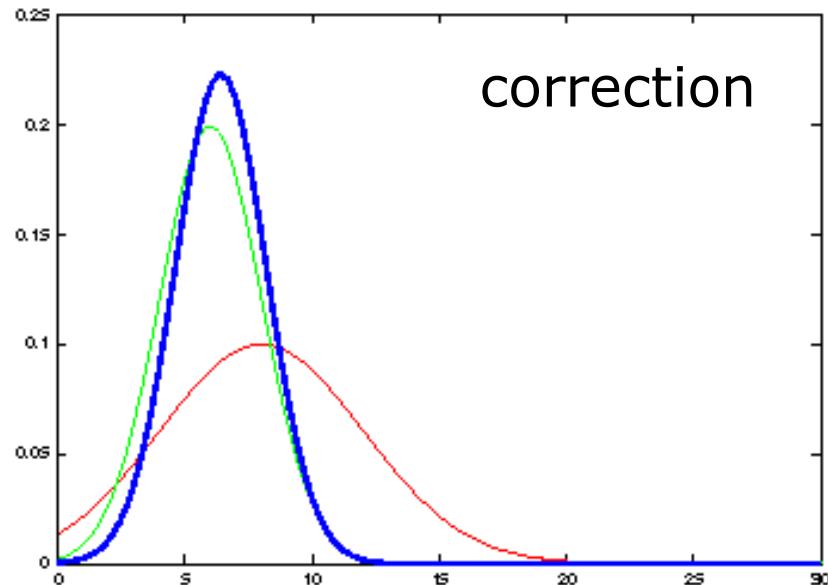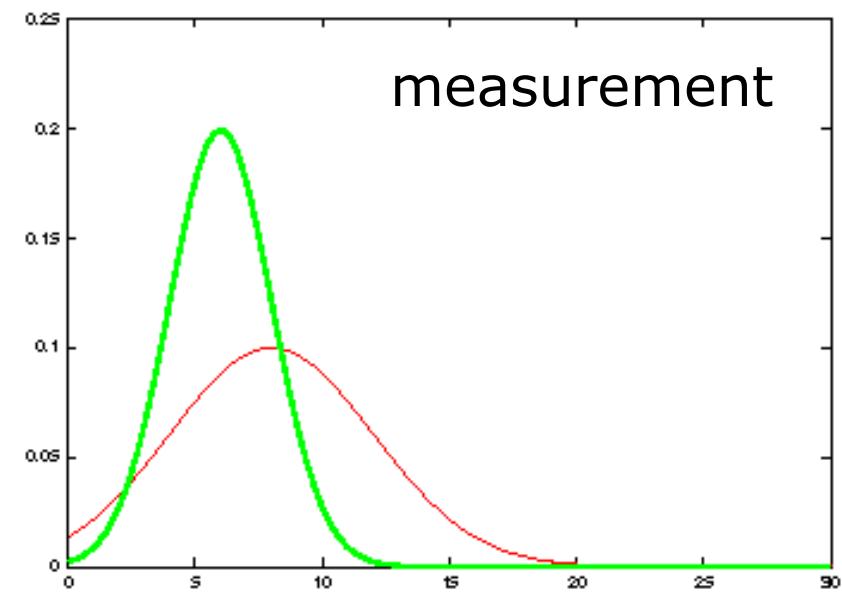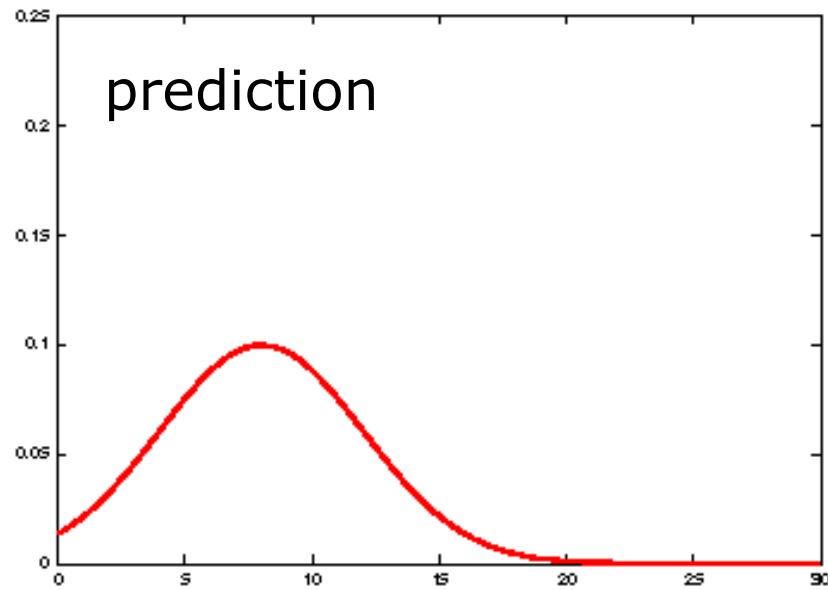

It's a weighted mean!

Kalman Filter Update Example

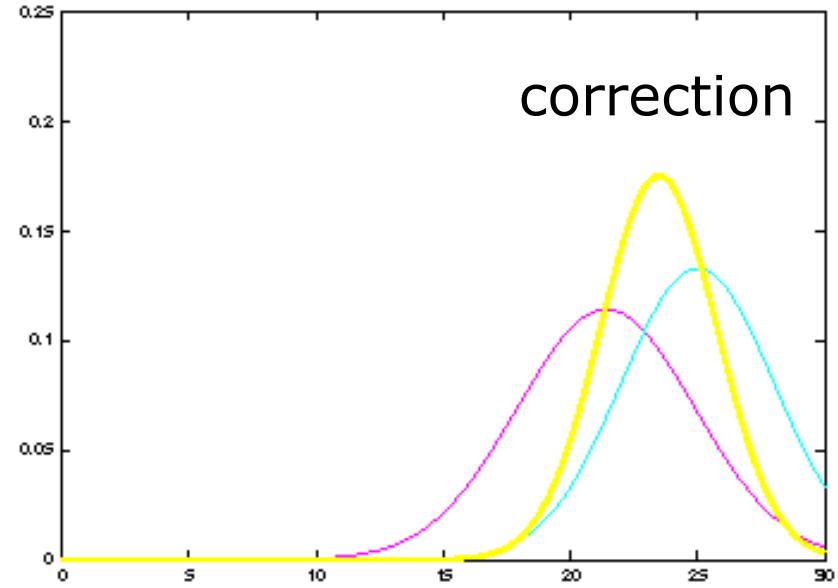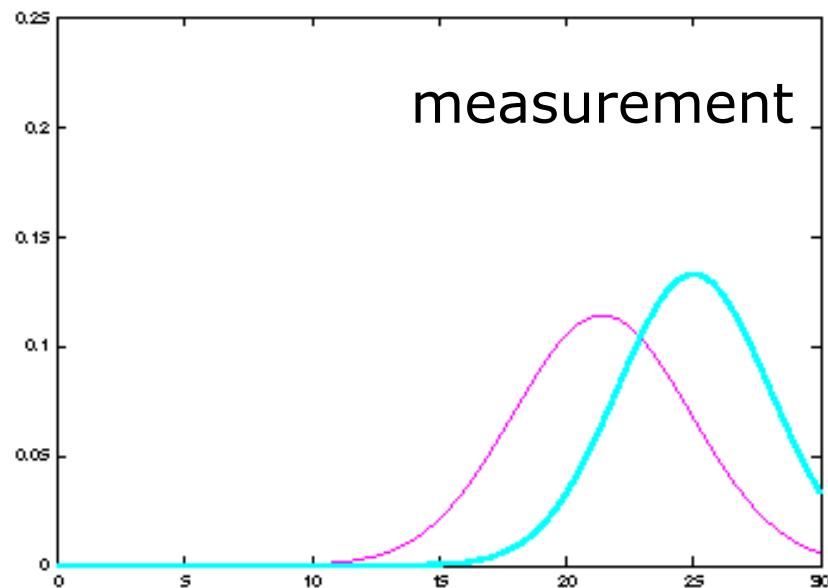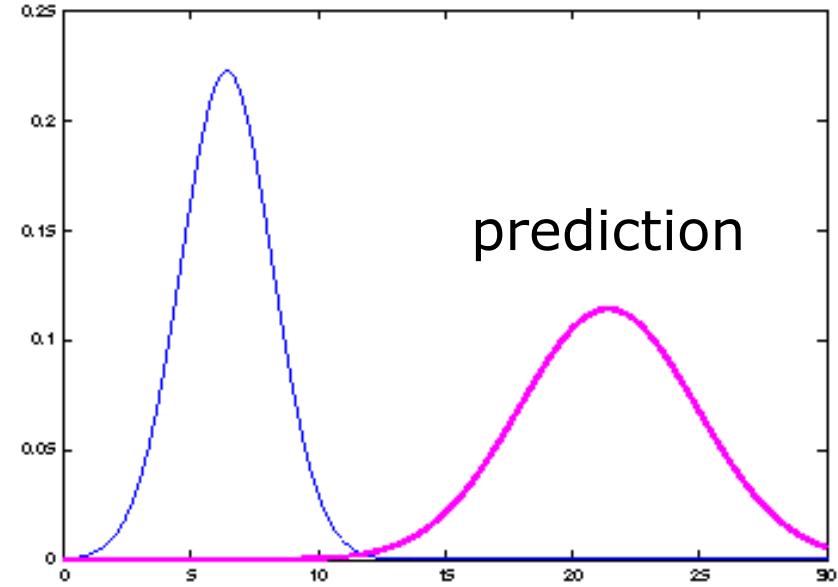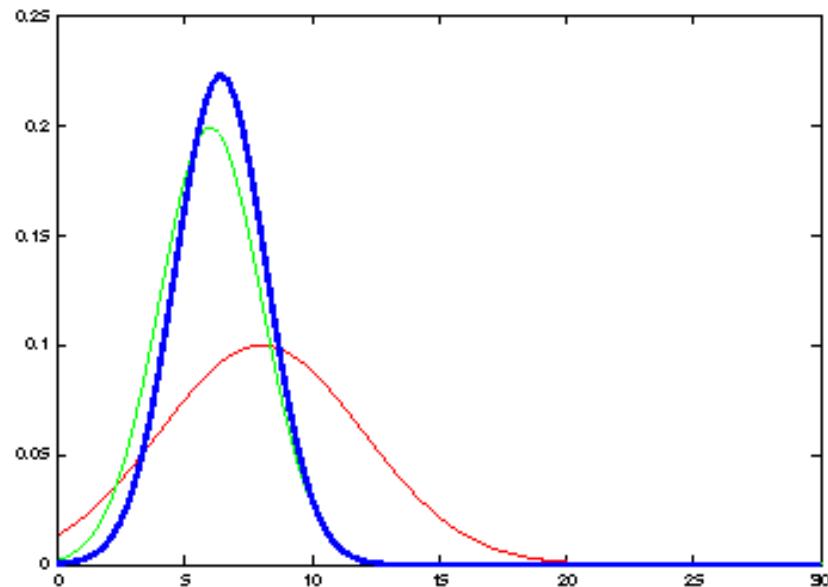

Kalman Filter Algorithm

1. Algorithm **Kalman_filter**(μ_{t-1} , Σ_{t-1} , u_t , z_t):
2. Prediction:
3. $\underline{\mu}_t = A_t \mu_{t-1} + B_t u_t$
4. $\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + Q_t$
5. Correction:
6. $K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + R_t)^{-1}$
7. $\mu_t = \underline{\mu}_t + K_t (z_t - C_t \underline{\mu}_t)$
8. $\Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$
9. Return μ_t , Σ_t

Nonlinear Dynamic Systems

- Most realistic robotic problems involve nonlinear functions

$$\cancel{x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t}$$




$$\cancel{z_t = C_t x_t + \delta_t}$$




$$x_t = g(u_t, x_{t-1})$$

$$z_t = h(x_t)$$



Linearity Assumption Revisited

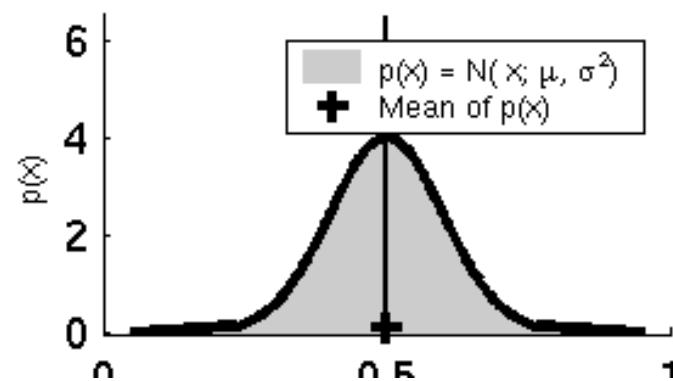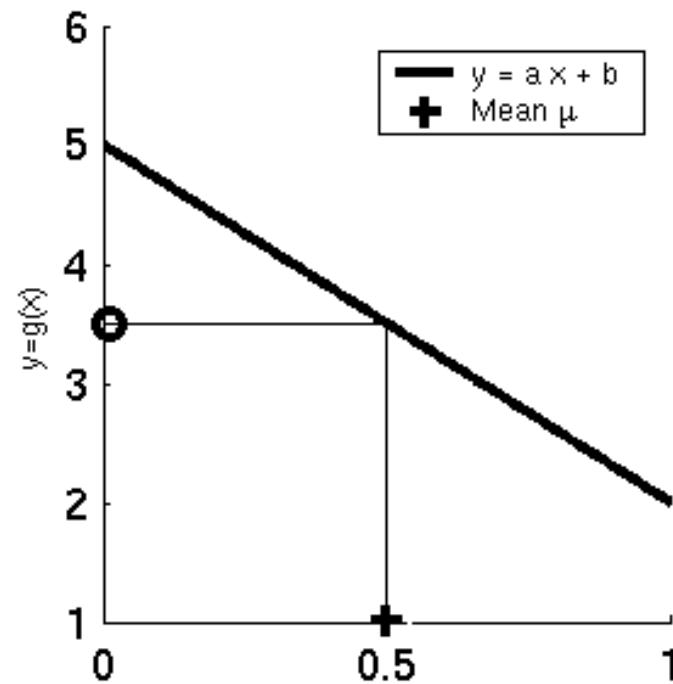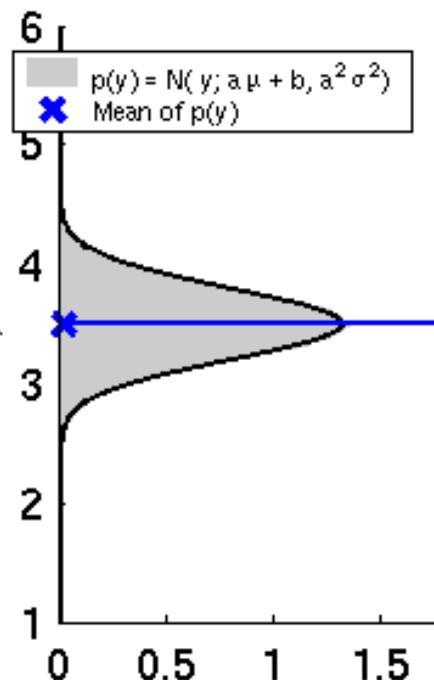

Non-Linear Function

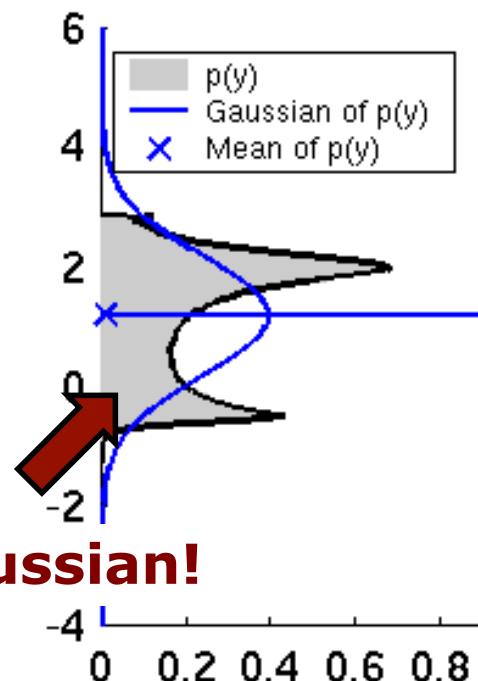

Non-Gaussian!

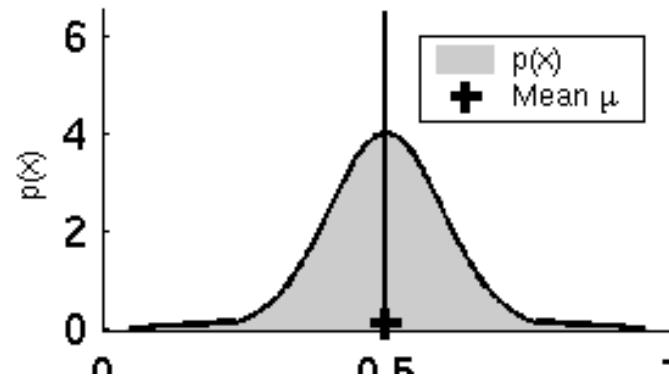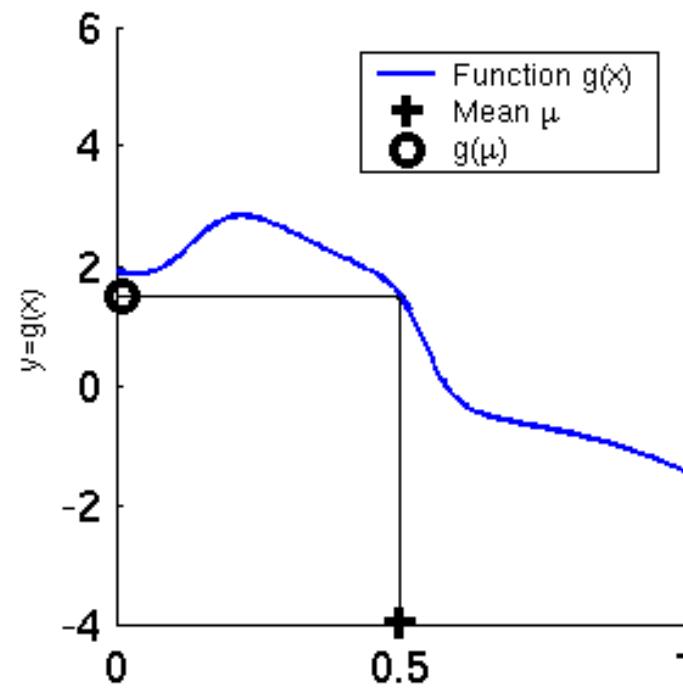

Non-Gaussian Distributions

- The non-linear functions lead to non-Gaussian distributions
- Kalman filter is not applicable anymore!

What can be done to resolve this?

Non-Gaussian Distributions

- The non-linear functions lead to non-Gaussian distributions
- Kalman filter is not applicable anymore!

What can be done to resolve this?

Local linearization!

EKF Linearization: First Order Taylor Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$

- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$

$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

Jacobian matrices

Reminder: Jacobian Matrix

- It is a **non-square matrix** $n \times m$ in general
- Given a vector-valued function



$$f(\mathbf{x}) = \begin{bmatrix} f_1(\mathbf{x}) \\ f_2(\mathbf{x}) \\ \vdots \\ f_m(\mathbf{x}) \end{bmatrix}$$

- The **Jacobian matrix** is defined as

$$\mathbf{F}_{\mathbf{x}} = \begin{bmatrix} \frac{\partial f_1}{\partial x_1} & \frac{\partial f_1}{\partial x_2} & \cdots & \frac{\partial f_1}{\partial x_n} \\ \frac{\partial f_2}{\partial x_1} & \frac{\partial f_2}{\partial x_2} & \cdots & \frac{\partial f_2}{\partial x_n} \\ \vdots & \vdots & \ddots & \vdots \\ \frac{\partial f_m}{\partial x_1} & \frac{\partial f_m}{\partial x_2} & \cdots & \frac{\partial f_m}{\partial x_n} \end{bmatrix}$$

Reminder: Jacobian Matrix

- It is the orientation of the tangent plane to the vector-valued function at a given point

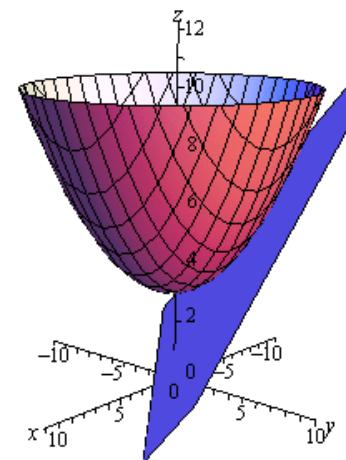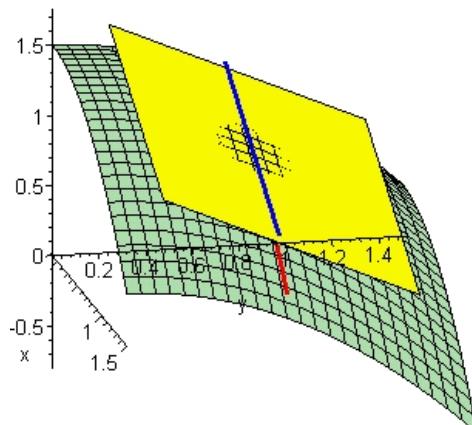

- Generalizes the gradient of a scalar valued function

EKF Linearization: First Order Taylor Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$




- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$




$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

Linear function!




Linearity Assumption Revisited

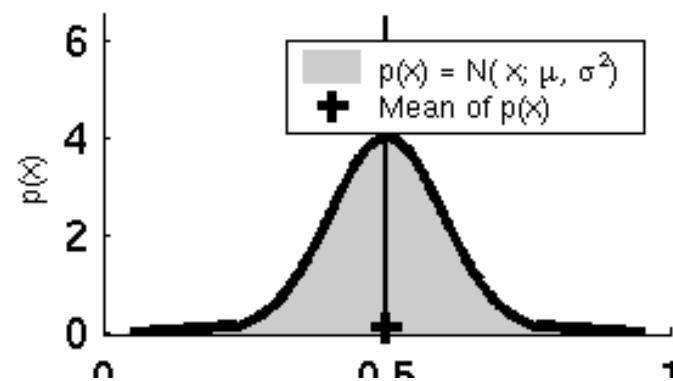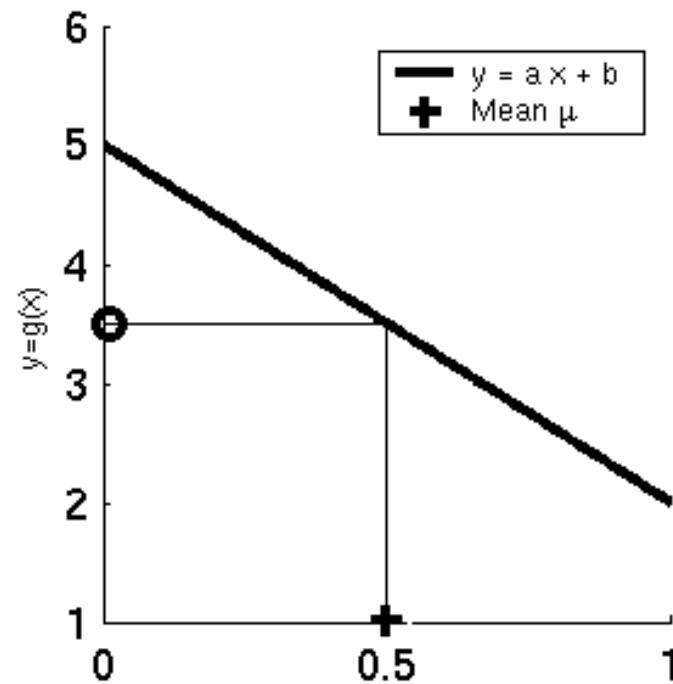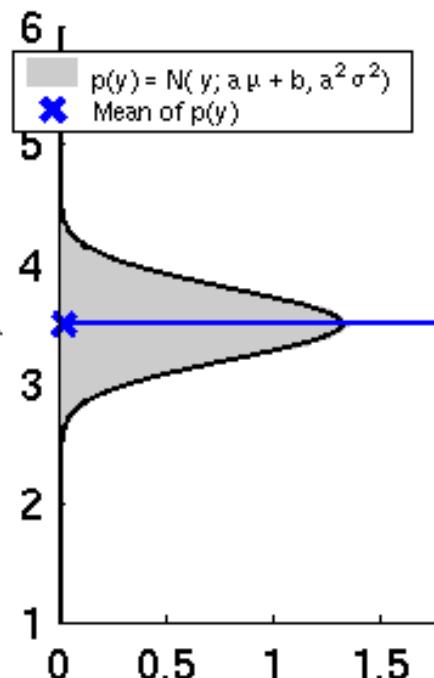




Non-Linear Function

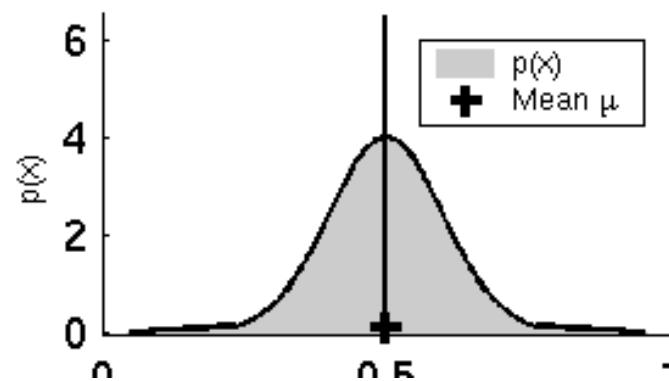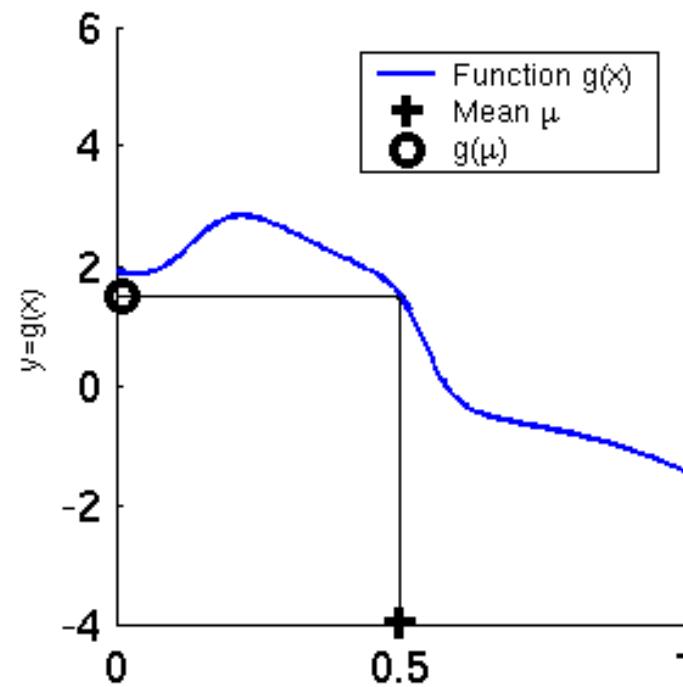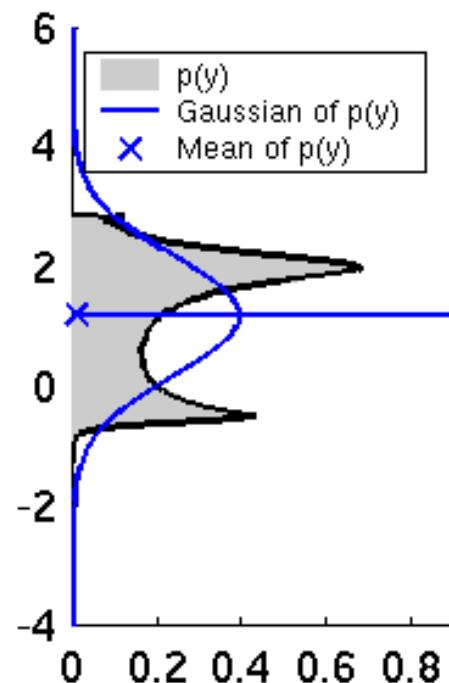




EKF Linearization (1)

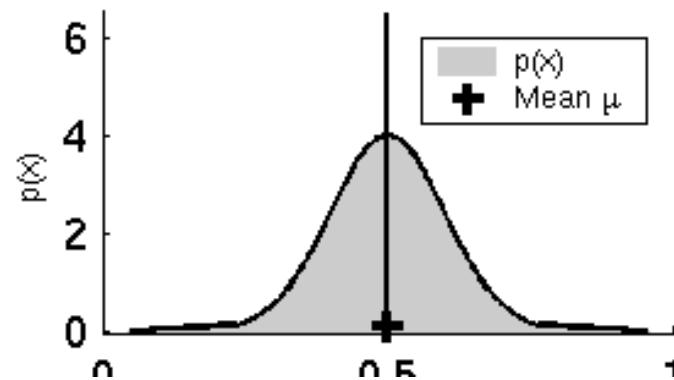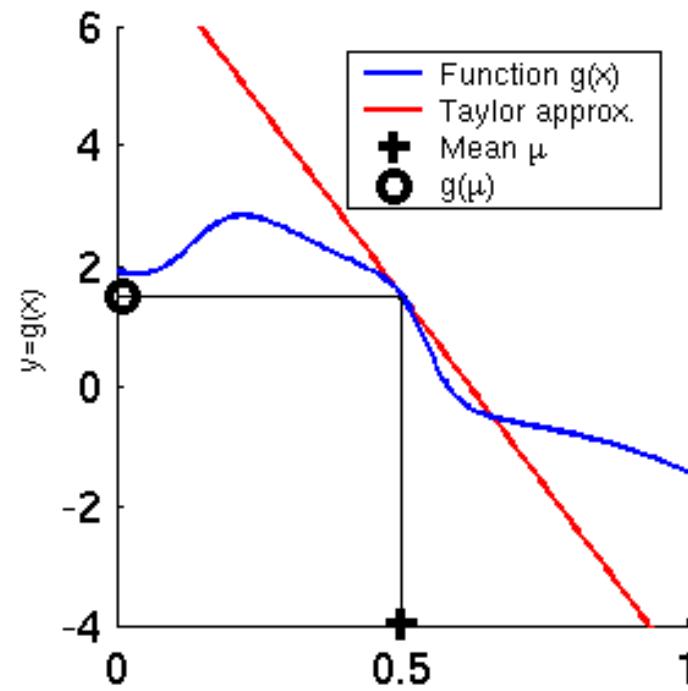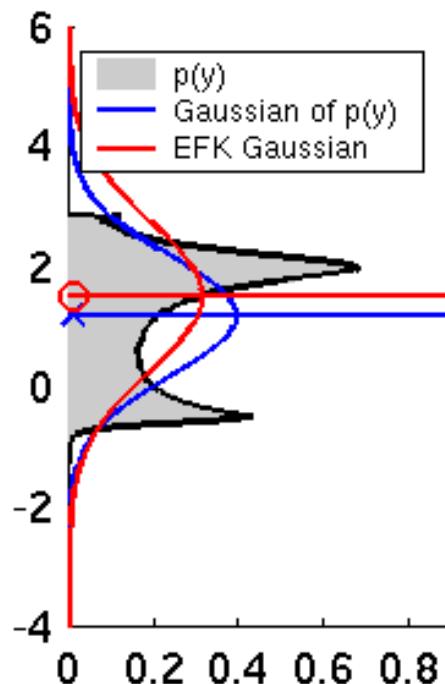

EKF Linearization (2)

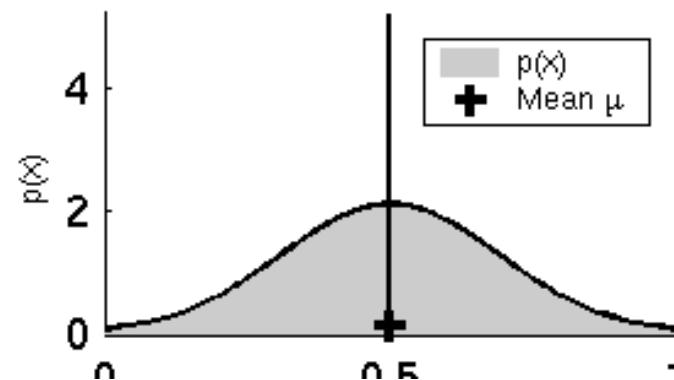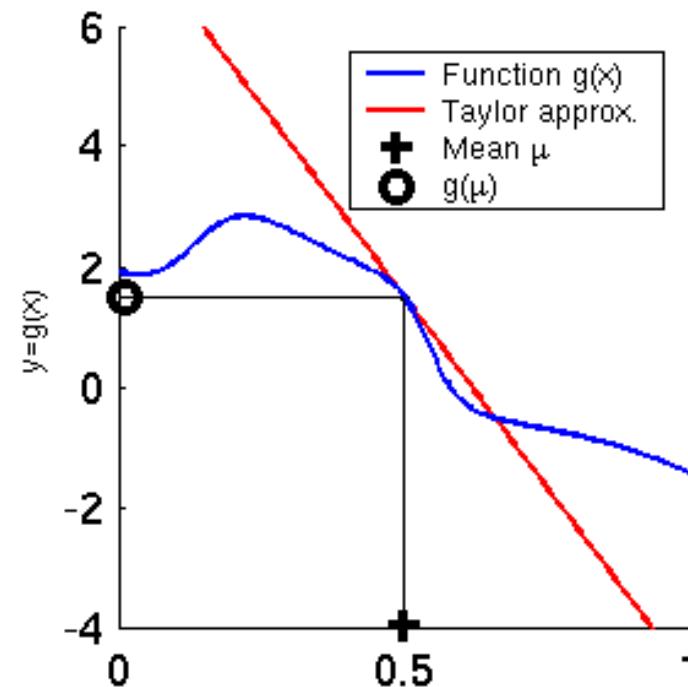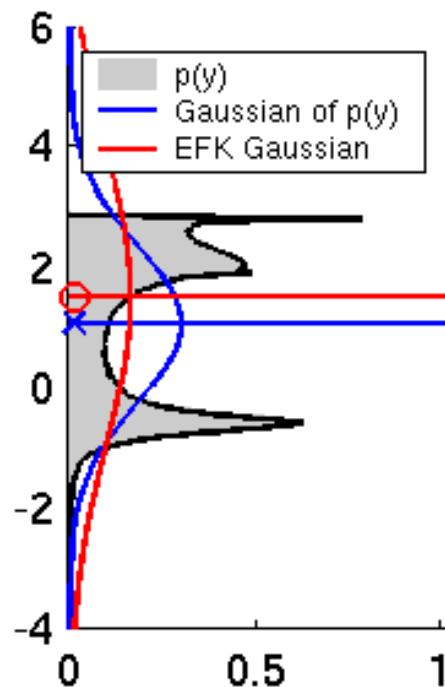

EKF Linearization (3)

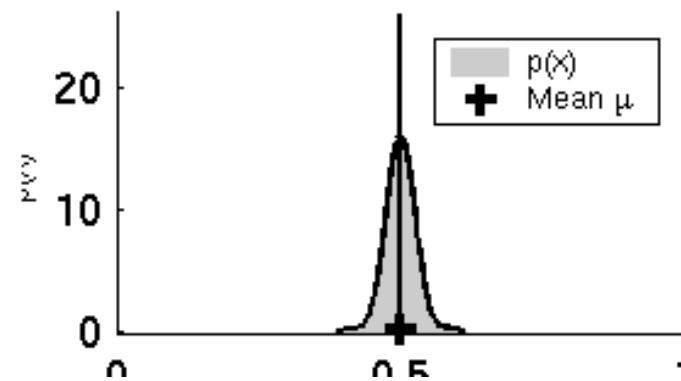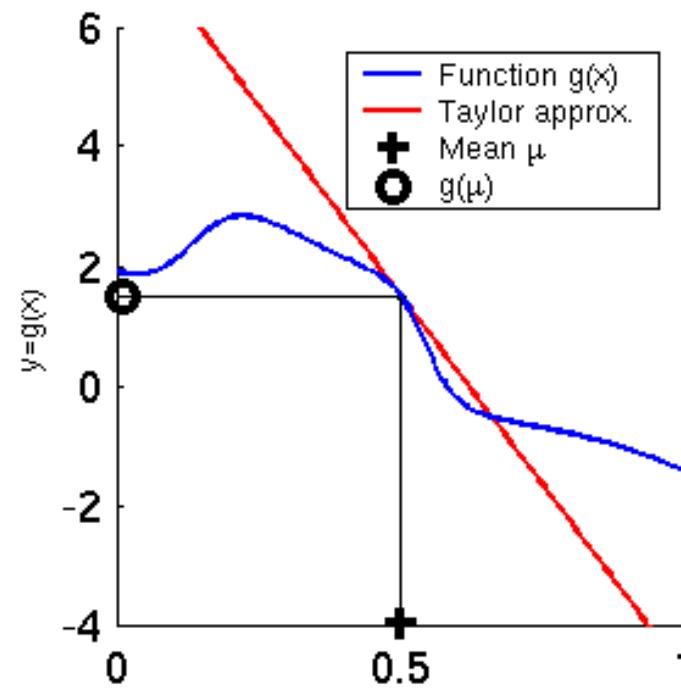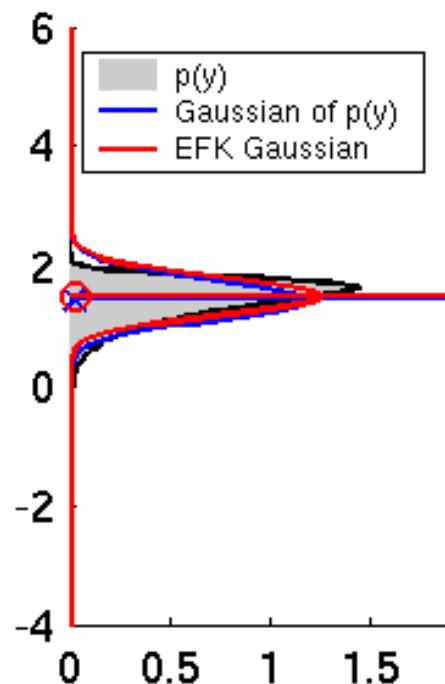

EKF Algorithm

1. **Extended_Kalman_filter**(μ_{t-1} , Σ_{t-1} , u_t , z_t):

2. Prediction:

$$\begin{array}{ll} 3. \quad \bar{\mu}_t = g(u_t, \mu_{t-1}) & \longleftarrow \quad \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ 4. \quad \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + Q_t & \longleftarrow \quad \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + Q_t \end{array}$$

5. Correction:

$$\begin{array}{ll} 6. \quad K_t = \bar{\Sigma}_t H_t^T (H_t \bar{\Sigma}_t H_t^T + R_t)^{-1} & \longleftarrow \quad K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + R_t)^{-1} \\ 7. \quad \mu_t = \bar{\mu}_t + K_t (z_t - h(\bar{\mu}_t)) & \longleftarrow \quad \mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t) \\ 8. \quad \Sigma_t = (I - K_t H_t) \bar{\Sigma}_t & \longleftarrow \quad \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{array}$$

9. Return μ_t , Σ_t

$$H_t = \frac{\partial h(\bar{\mu}_t)}{\partial x_t} \qquad G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}}$$

Example: EKF Localization

- EKF localization with landmarks (point features)



1. EKF_localization (μ_{t-1} , Σ_{t-1} , u_t , z_t , m):

Prediction:

$$2. \quad G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial \mu_{t-1}} = \begin{pmatrix} \frac{\partial x'}{\partial \mu_{t-1,x}} & \frac{\partial x'}{\partial \mu_{t-1,y}} & \frac{\partial x'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial y'}{\partial \mu_{t-1,x}} & \frac{\partial y'}{\partial \mu_{t-1,y}} & \frac{\partial y'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial \theta'}{\partial \mu_{t-1,x}} & \frac{\partial \theta'}{\partial \mu_{t-1,y}} & \frac{\partial \theta'}{\partial \mu_{t-1,\theta}} \end{pmatrix} \quad \text{Jacobian of } g \text{ w.r.t location}$$

$$3. \quad V_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial u_t} = \begin{pmatrix} \frac{\partial x'}{\partial v_t} & \frac{\partial x'}{\partial \omega_t} \\ \frac{\partial y'}{\partial v_t} & \frac{\partial y'}{\partial \omega_t} \\ \frac{\partial \theta'}{\partial v_t} & \frac{\partial \theta'}{\partial \omega_t} \end{pmatrix} \quad \text{Jacobian of } g \text{ w.r.t control}$$

$$4. \quad Q_t = \begin{pmatrix} (\alpha_1 |v_t| + \alpha_2 |\omega_t|)^2 & 0 \\ 0 & (\alpha_3 |v_t| + \alpha_4 |\omega_t|)^2 \end{pmatrix} \quad \text{Motion noise}$$

$$5. \quad \bar{\mu}_t = g(u_t, \mu_{t-1}) \quad \text{Predicted mean}$$

$$6. \quad \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t Q_t V_t^T \quad \text{Predicted covariance } (V \text{ maps } Q \text{ into state space})$$

1. EKF_localization (μ_{t-1} , Σ_{t-1} , u_t , z_t , m):

Correction:

2. $\hat{z}_t = \begin{pmatrix} \sqrt{(m_x - \bar{\mu}_{t,x})^2 + (m_y - \bar{\mu}_{t,y})^2} \\ \text{atan} 2(m_y - \bar{\mu}_{t,y}, m_x - \bar{\mu}_{t,x}) - \bar{\mu}_{t,\theta} \end{pmatrix}$ Predicted measurement mean
(depends on observation type)

3. $H_t = \frac{\partial h(\bar{\mu}_t, m)}{\partial x_t} = \begin{pmatrix} \frac{\partial r_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \phi_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial \phi_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial \phi_t}{\partial \bar{\mu}_{t,\theta}} \end{pmatrix}$ Jacobian of h w.r.t location

4. $R_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_r^2 \end{pmatrix}$





5. $S_t = H_t \bar{\Sigma}_t H_t^T + R_t$ Innovation covariance

6. $K_t = \bar{\Sigma}_t H_t^T S_t^{-1}$ Kalman gain





7. $\mu_t = \bar{\mu}_t + K_t(z_t - \hat{z}_t)$ Updated mean

8. $\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$ Updated covariance





EKF Prediction Step Examples

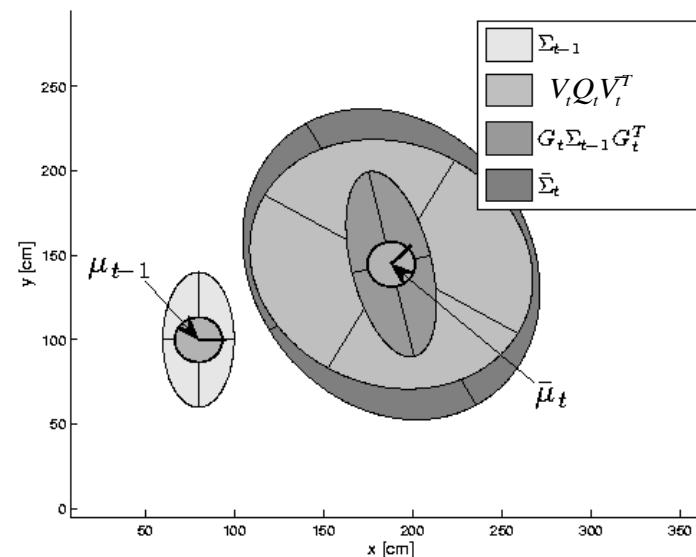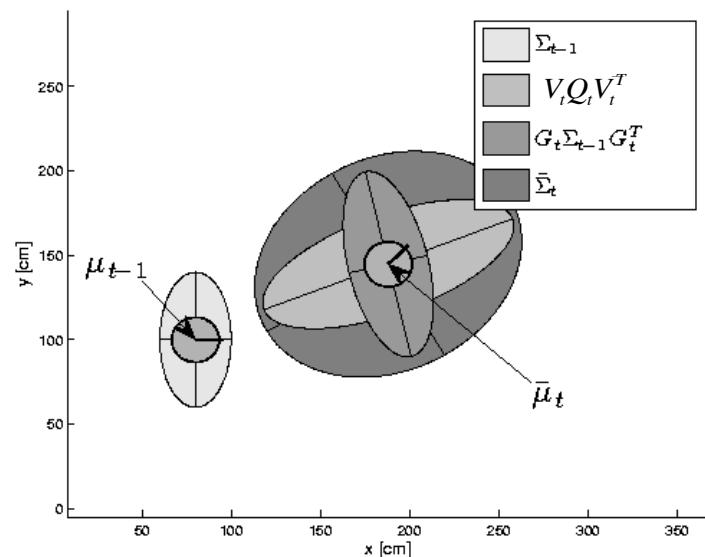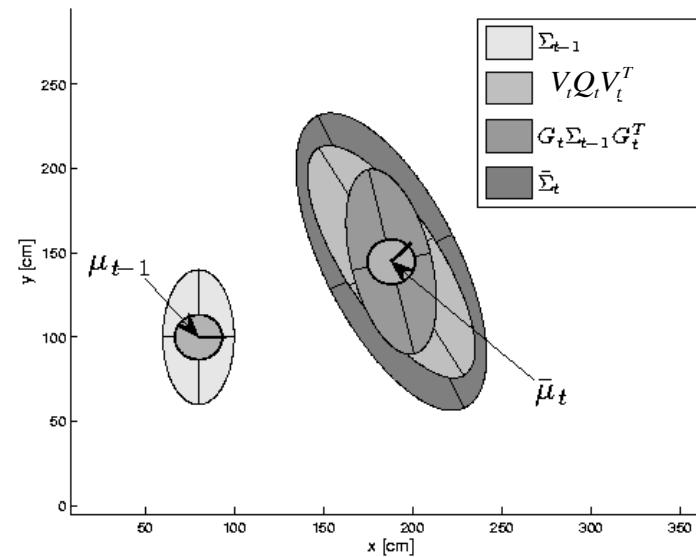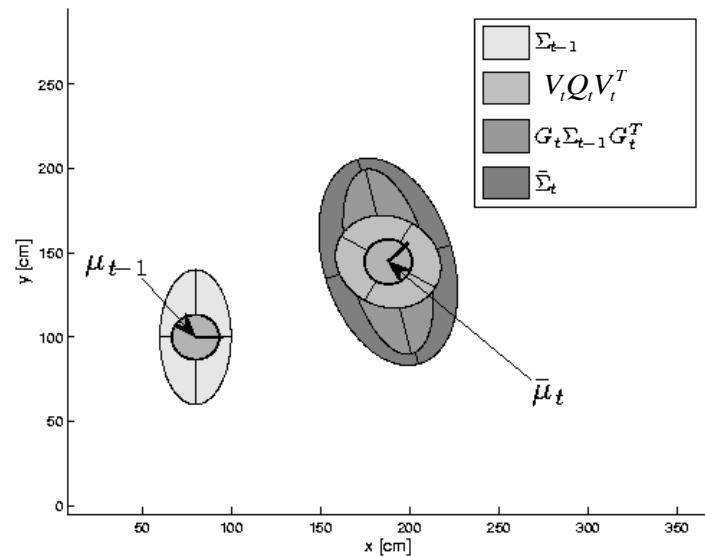



EKF Observation Prediction Step

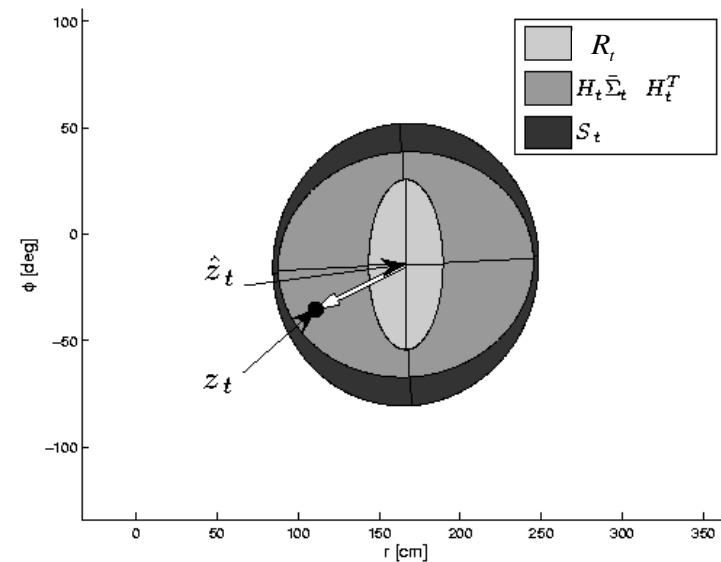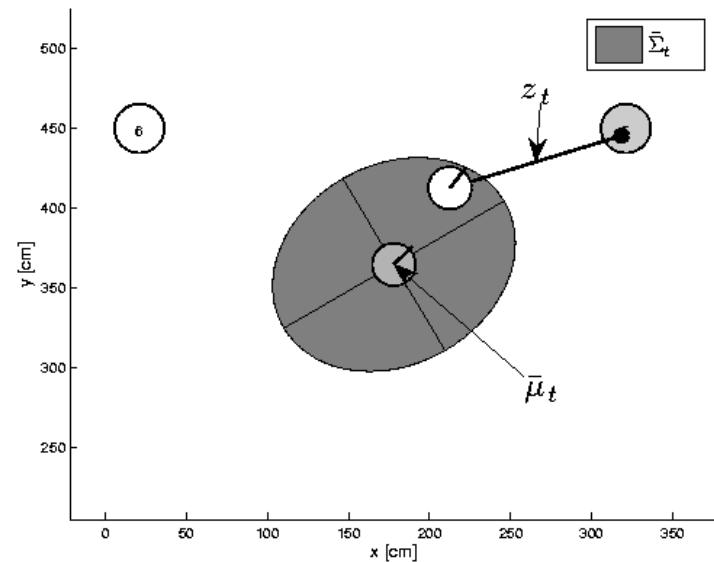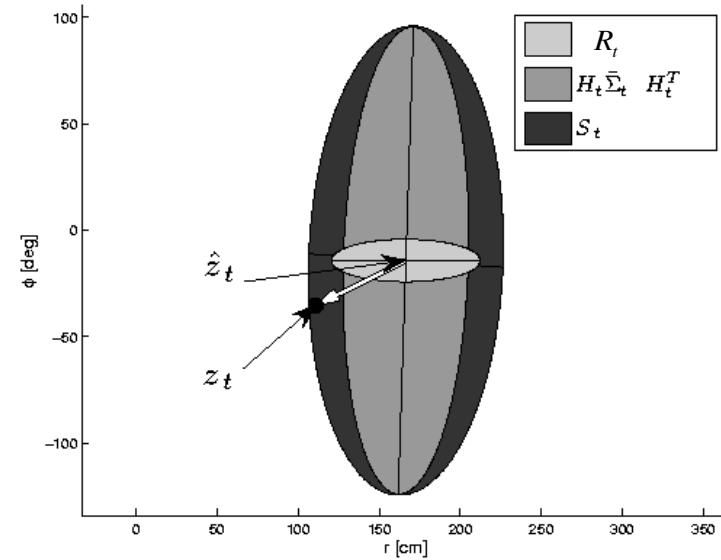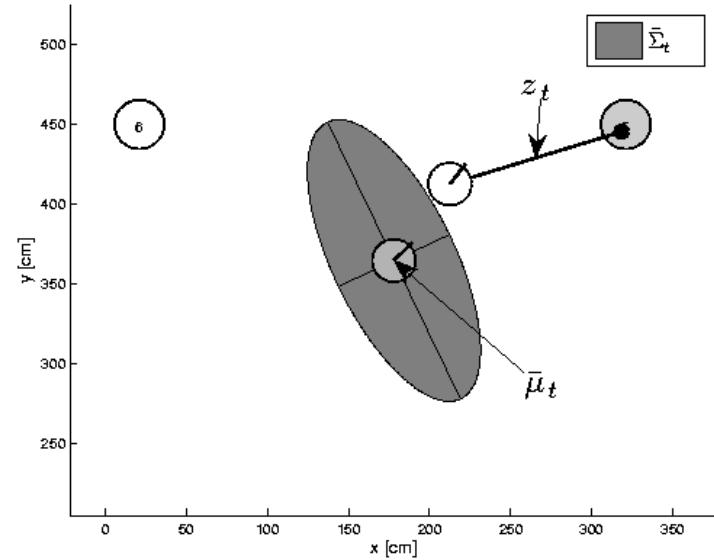



EKF Correction Step

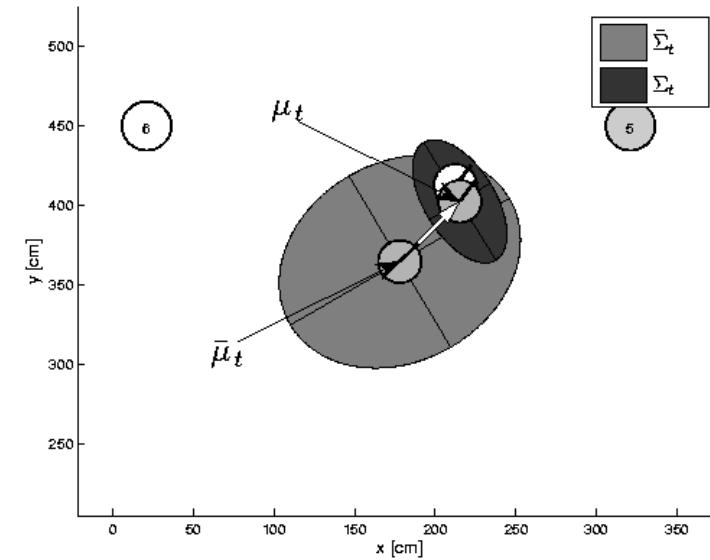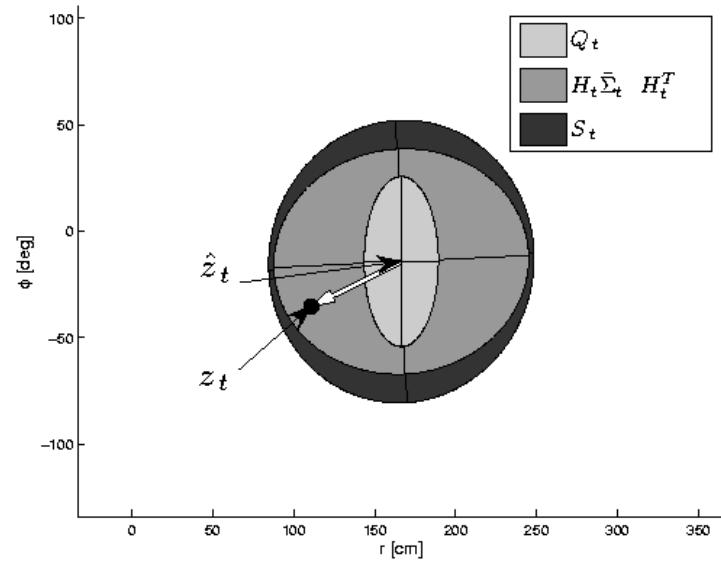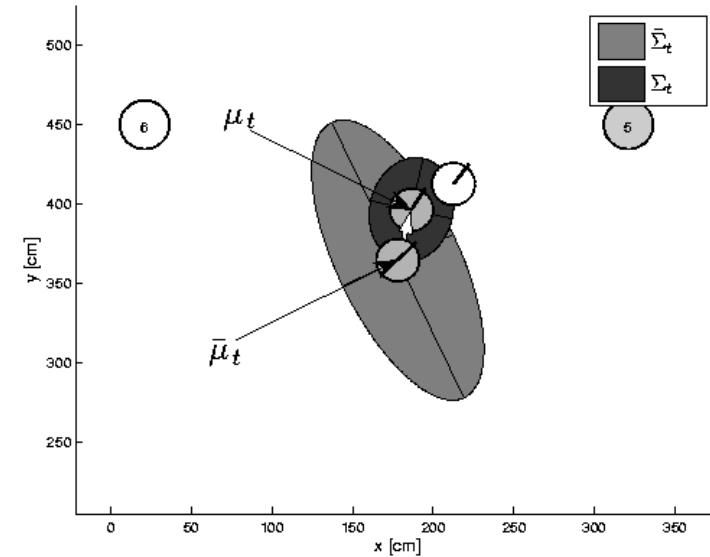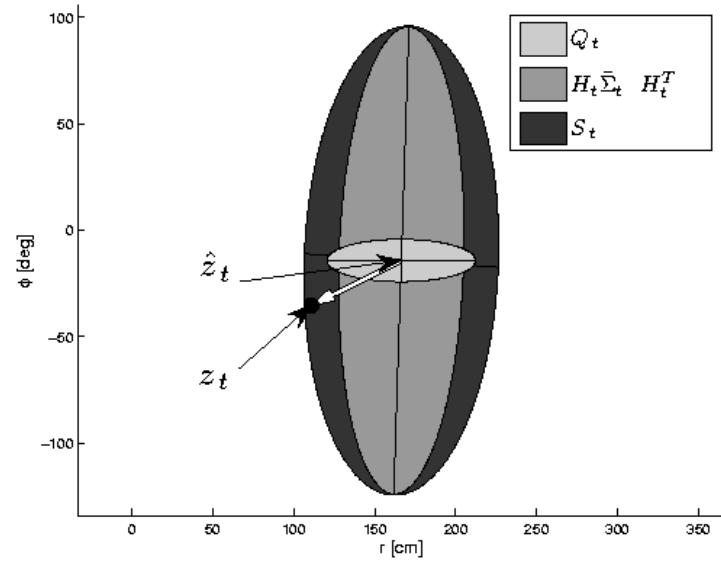


Estimation Sequence (1)

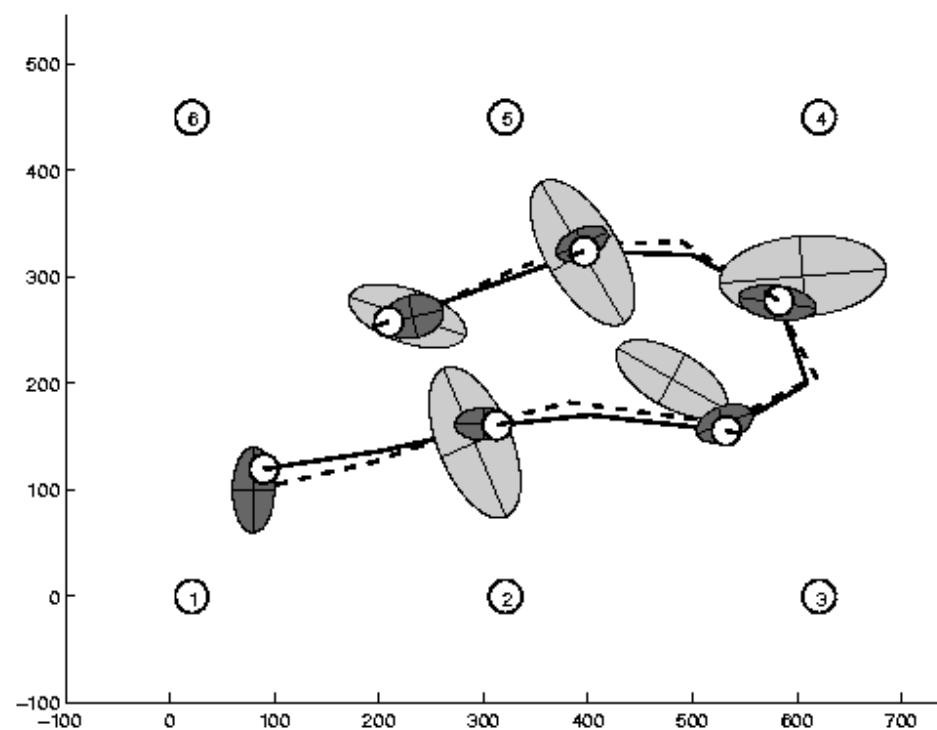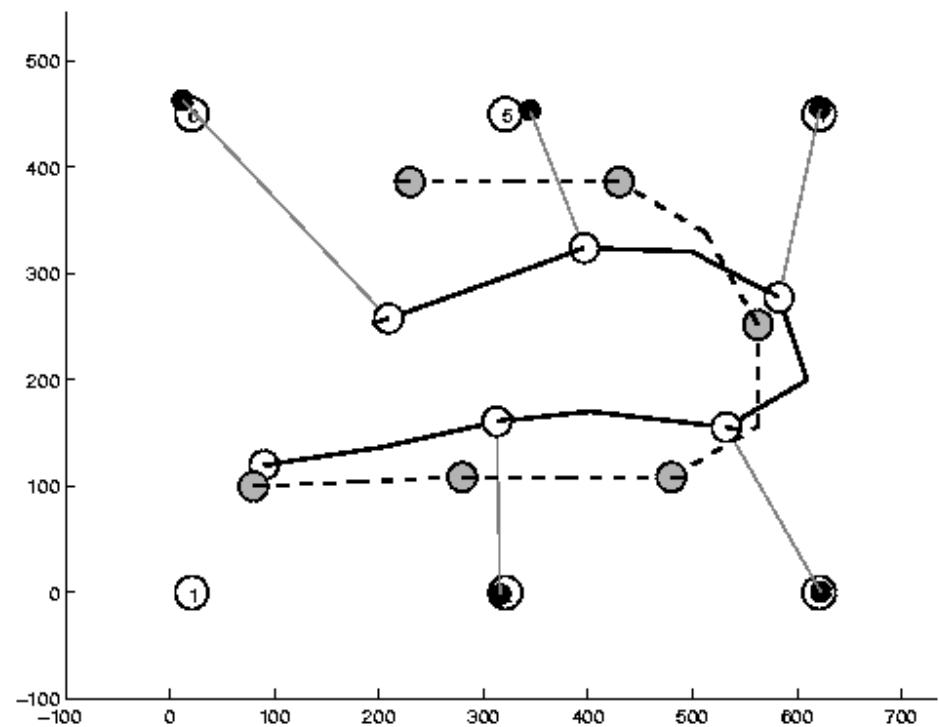

Estimation Sequence (2)

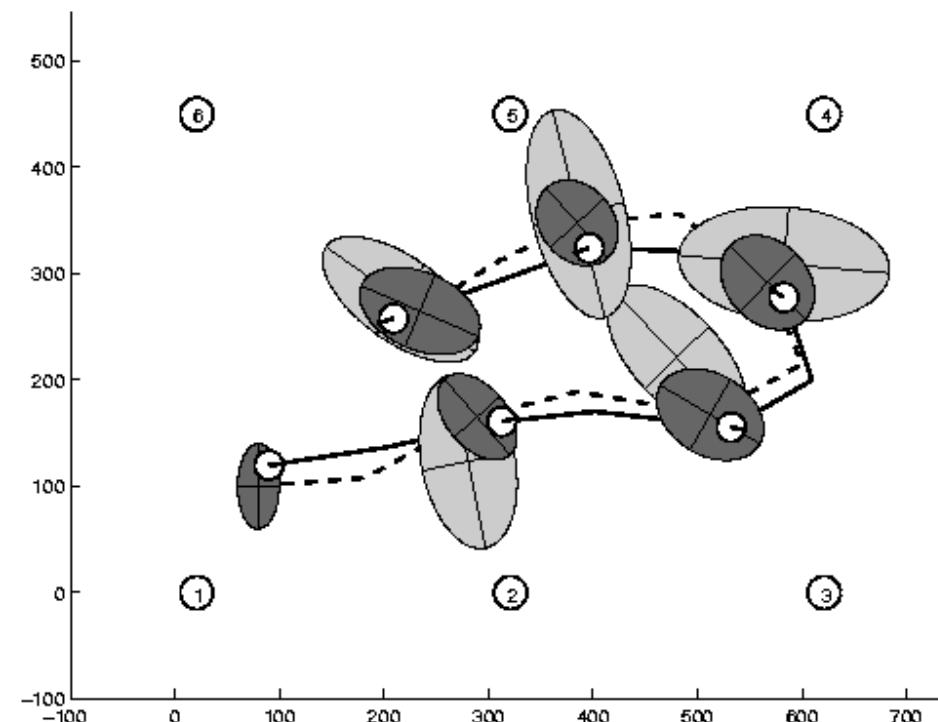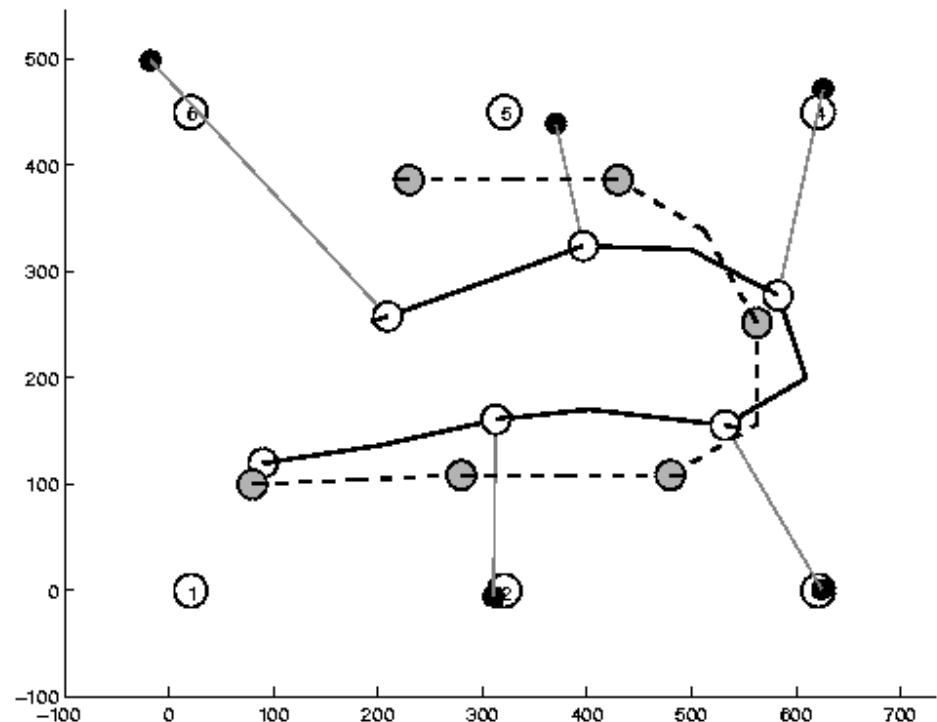

Comparison to GroundTruth

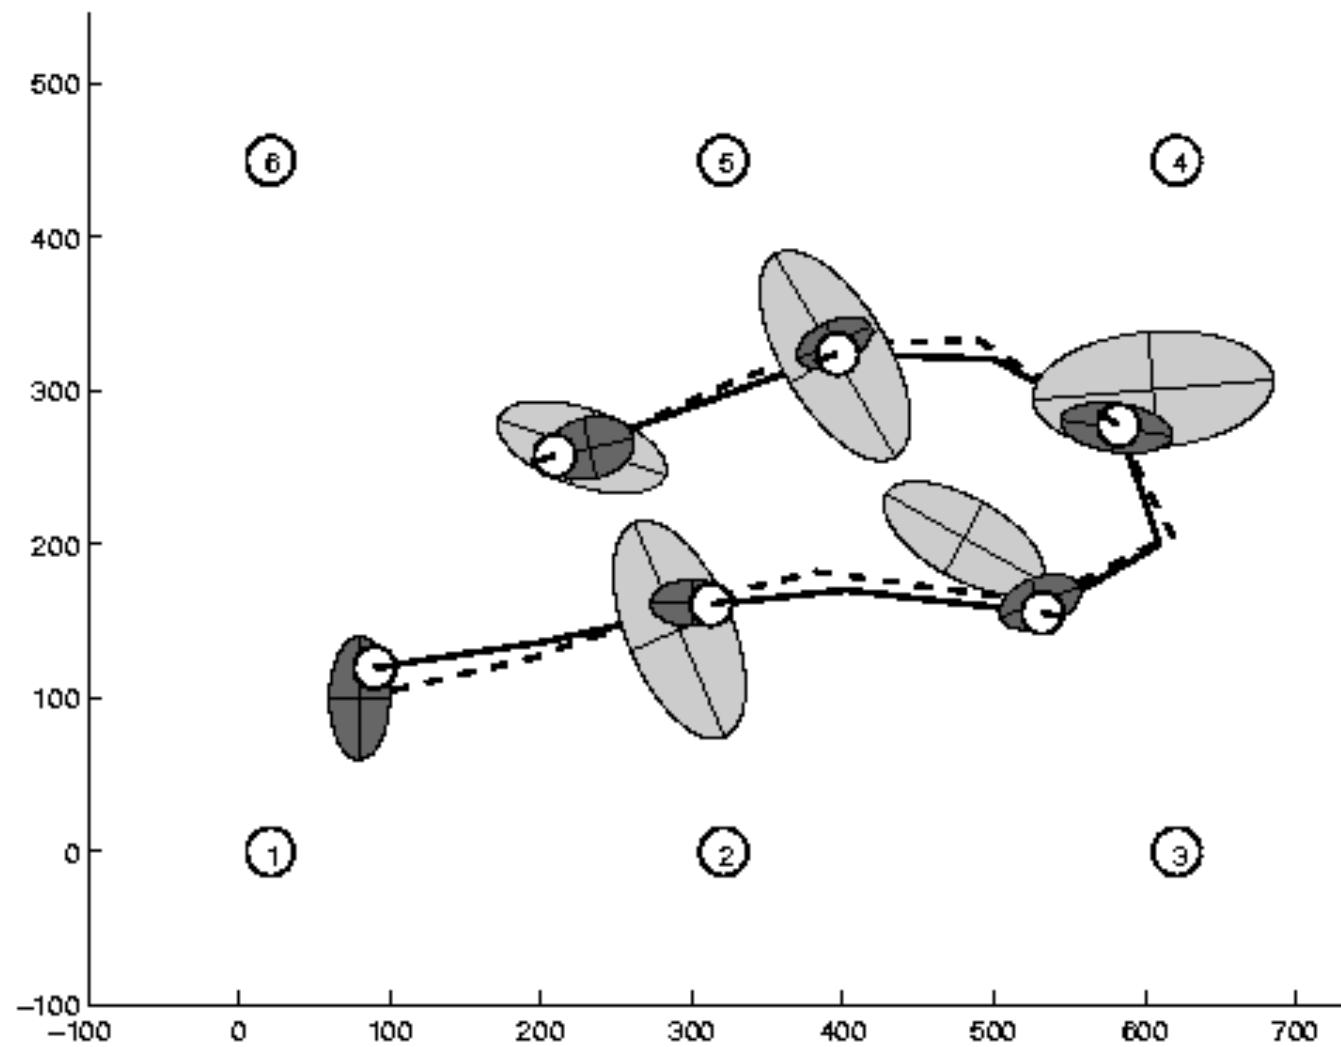

Extended Kalman Filter Summary

- Ad-hoc solution to deal with non-linearities
- Performs local linearizations in each step
- Works well in practice for moderate non-linearities
- Example: landmark localization
- There exists better ways for dealing with non-linearities such as the unscented Kalman filter called UKF