

Introduction to Mobile Robotics

Bayes Filter – Extended Kalman Filter

Wolfram Burgard, Diego Tipaldi



Bayes Filter Reminder

$$bel(x_t) = \eta p(z_t | x_t) \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Prediction

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Correction

$$bel(x_t) = \eta p(z_t | x_t) \overline{bel}(x_t)$$

Discrete Kalman Filter

Estimates the state x of a discrete-time controlled process

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

with a measurement

$$z_t = C_t x_t + \delta_t$$

Components of a Kalman Filter

$$A_t$$

Matrix (nxn) that describes how the state evolves from $t-1$ to t without controls or noise.

$$B_t$$

Matrix (n \times l) that describes how the control u_t changes the state from $t-1$ to t .

$$C_t$$




Matrix (k \times n) that describes how to map the state x_t to an observation z_t .

$$\varepsilon_t$$

Random variables representing the process and measurement noise that are assumed to be independent and normally distributed with covariance Q_t and R_t respectively.





$$\delta_t$$

Kalman Filter Update Example

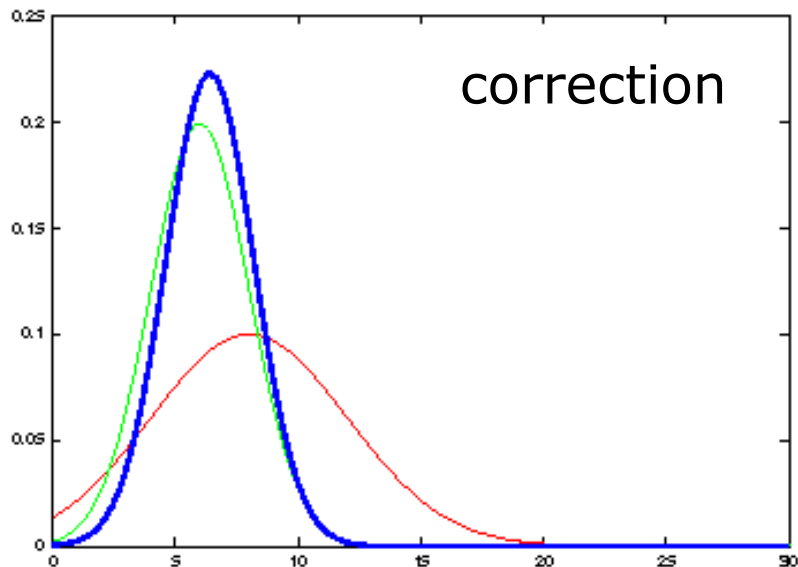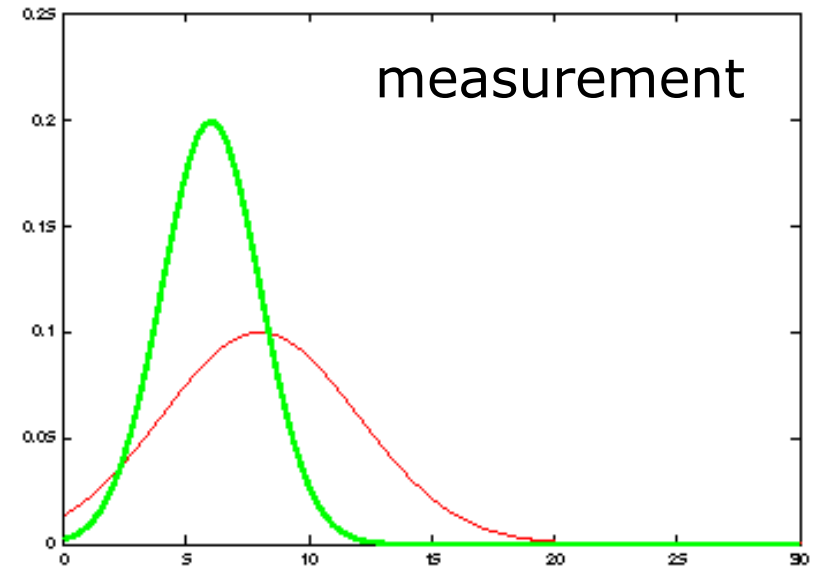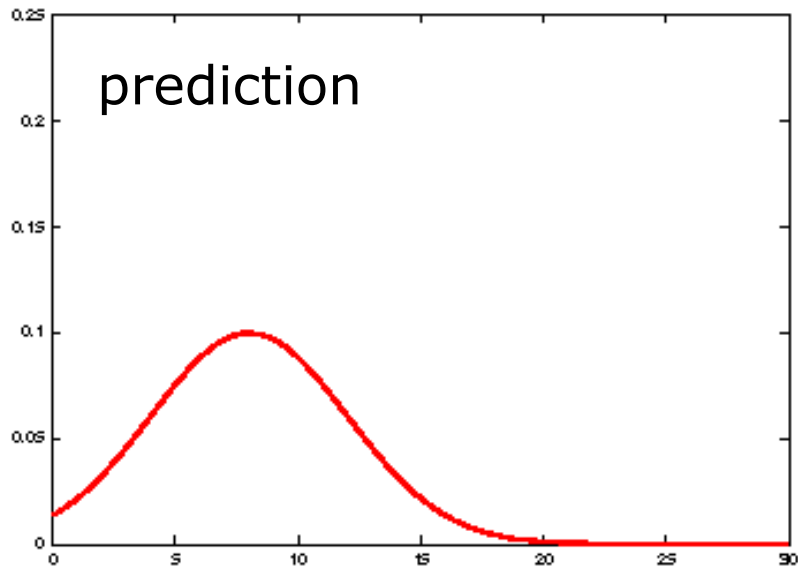

It's a weighted mean!

Kalman Filter Update Example

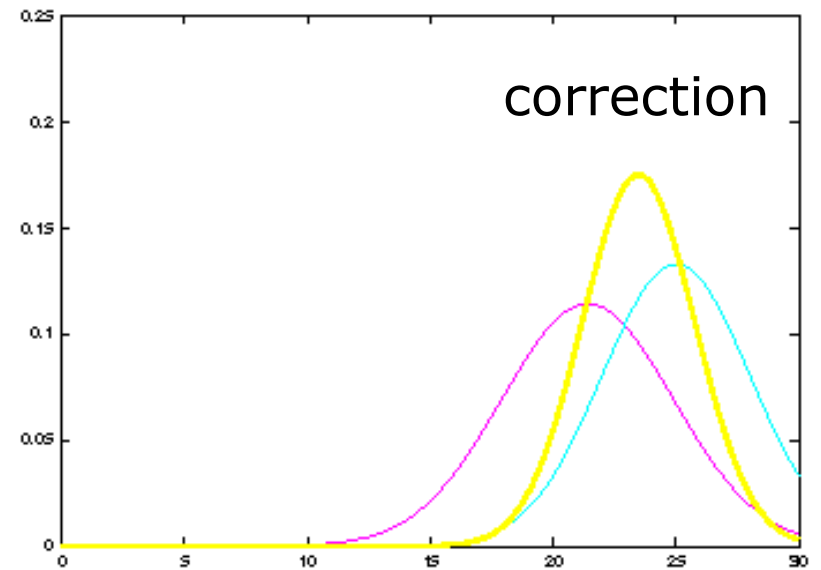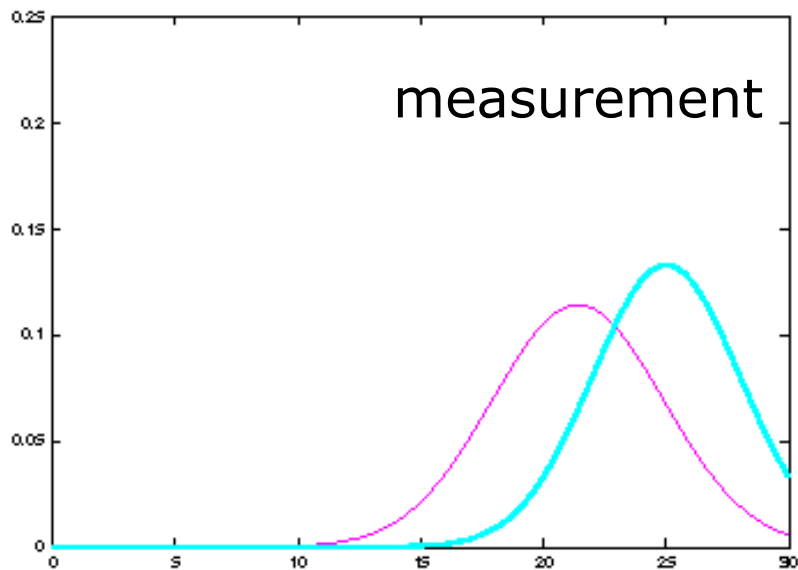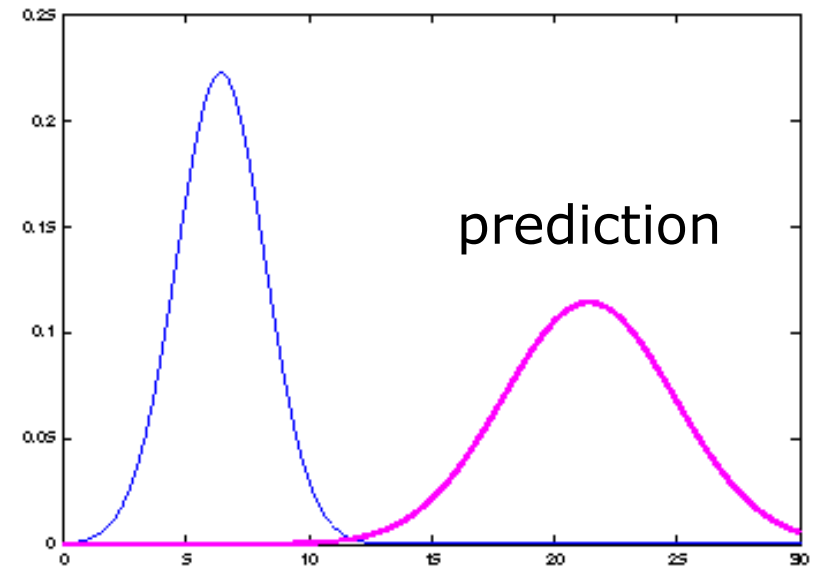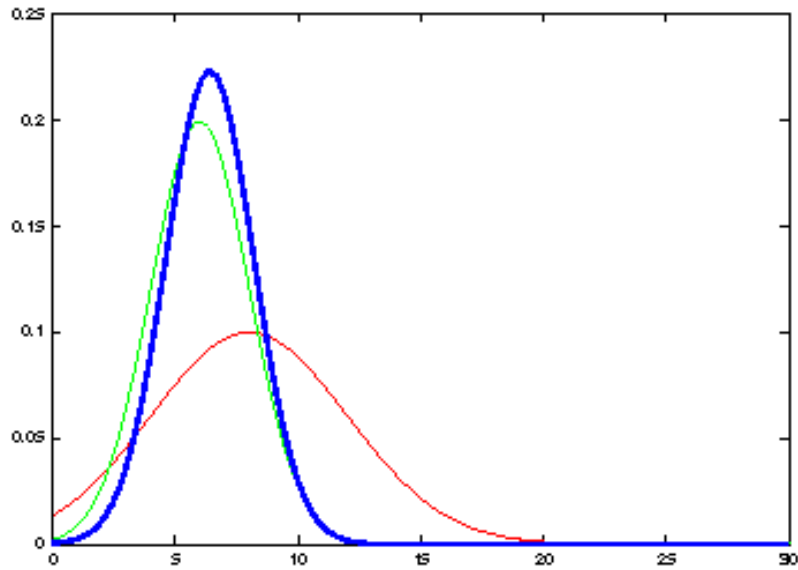

Kalman Filter Algorithm

1. Algorithm **Kalman_filter**($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):

2. Prediction:

3. $\bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$

4. $\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + Q_t$

5. Correction:

6. $K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + R_t)^{-1}$

7. $\mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t)$

8. $\Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$

9. Return μ_t, Σ_t

Nonlinear Dynamic Systems

- Most realistic robotic problems involve nonlinear functions

~~$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$~~






$$x_t = g(u_t, x_{t-1})$$

~~$$z_t = C_t x_t + \delta_t$$~~




$$z_t = h(x_t)$$



Linearity Assumption Revisited

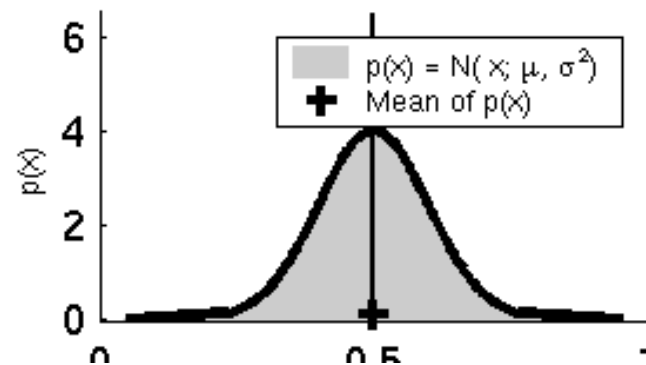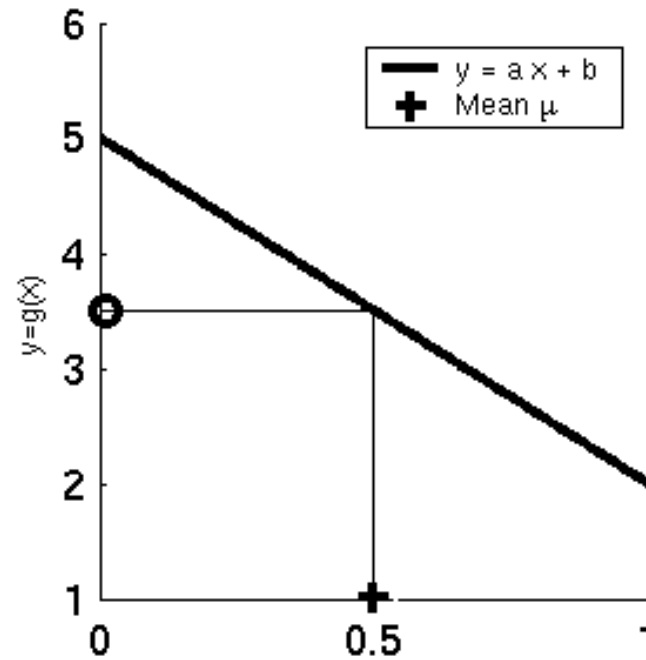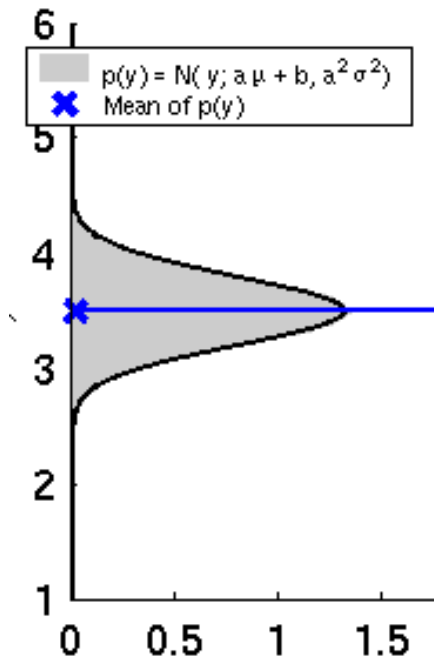

Non-Linear Function

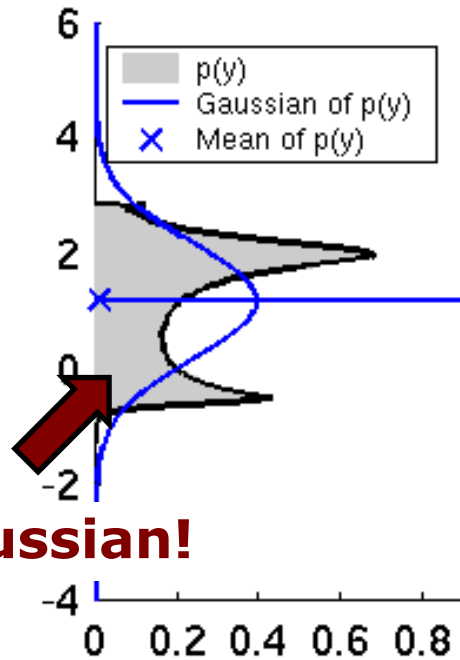

Non-Gaussian!

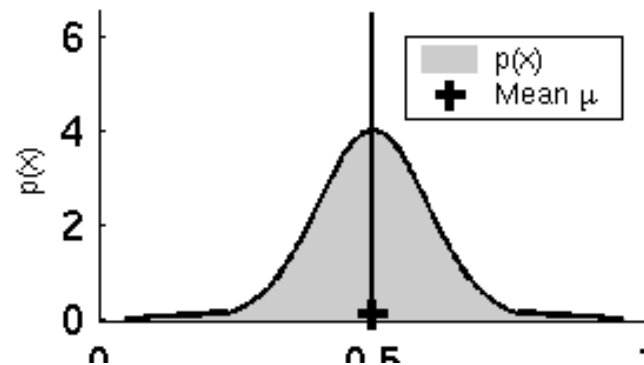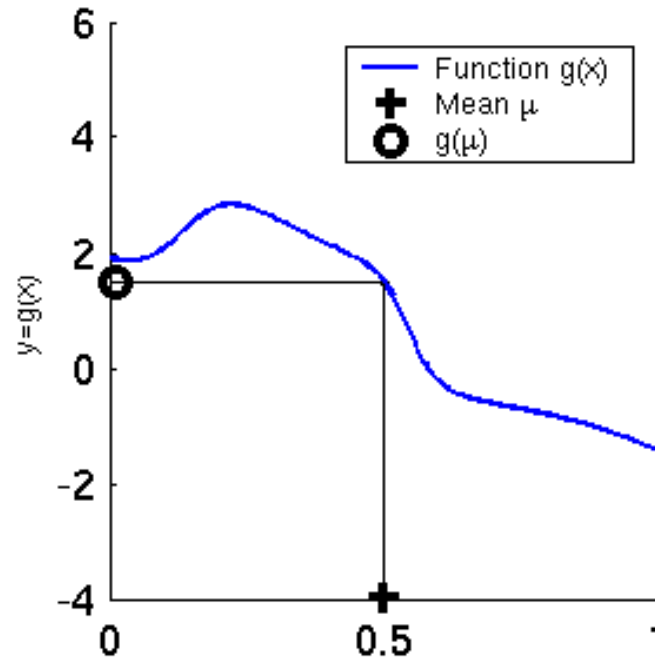

Non-Gaussian Distributions

- The non-linear functions lead to non-Gaussian distributions
- Kalman filter is not applicable anymore!

What can be done to resolve this?

Non-Gaussian Distributions

- The non-linear functions lead to non-Gaussian distributions
- Kalman filter is not applicable anymore!

What can be done to resolve this?

Local linearization!

EKF Linearization: First Order Taylor Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$

- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$

$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

Jacobian matrices



Reminder: Jacobian Matrix

- It is a **non-square matrix** $n \times m$ in general
- Given a vector-valued function



$$f(\mathbf{x}) = \begin{bmatrix} f_1(\mathbf{x}) \\ f_2(\mathbf{x}) \\ \vdots \\ f_m(\mathbf{x}) \end{bmatrix}$$

- The **Jacobian matrix** is defined as

$$\mathbf{F}_{\mathbf{x}} = \begin{bmatrix} \frac{\partial f_1}{\partial x_1} & \frac{\partial f_1}{\partial x_2} & \cdots & \frac{\partial f_1}{\partial x_n} \\ \frac{\partial f_2}{\partial x_1} & \frac{\partial f_2}{\partial x_2} & \cdots & \frac{\partial f_2}{\partial x_n} \\ \vdots & \vdots & \cdots & \vdots \\ \frac{\partial f_m}{\partial x_1} & \frac{\partial f_m}{\partial x_2} & \cdots & \frac{\partial f_m}{\partial x_n} \end{bmatrix}$$

Reminder: Jacobian Matrix

- It is the orientation of the tangent plane to the vector-valued function at a given point

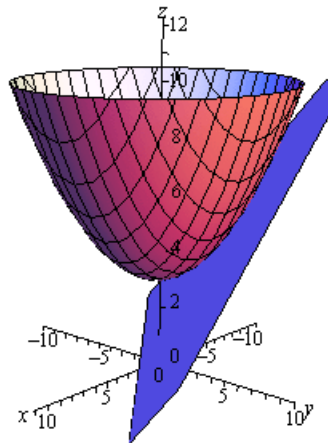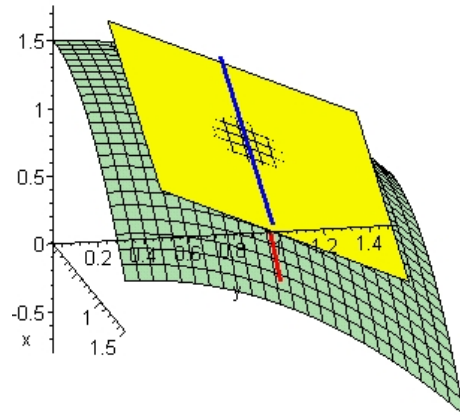

- Generalizes the gradient of a scalar valued function

EKF Linearization: First Order Taylor Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$

- Correction:




$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$

$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$




Linear function!






Linearity Assumption Revisited

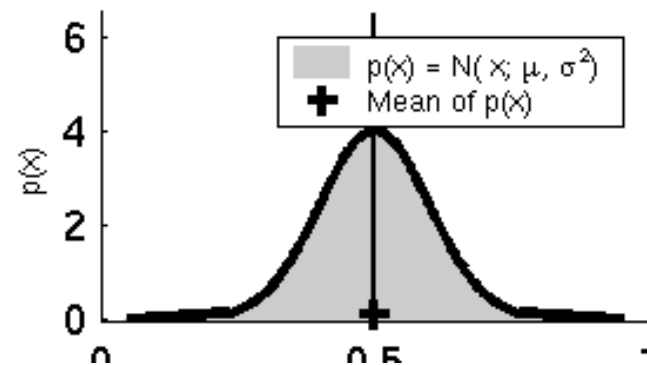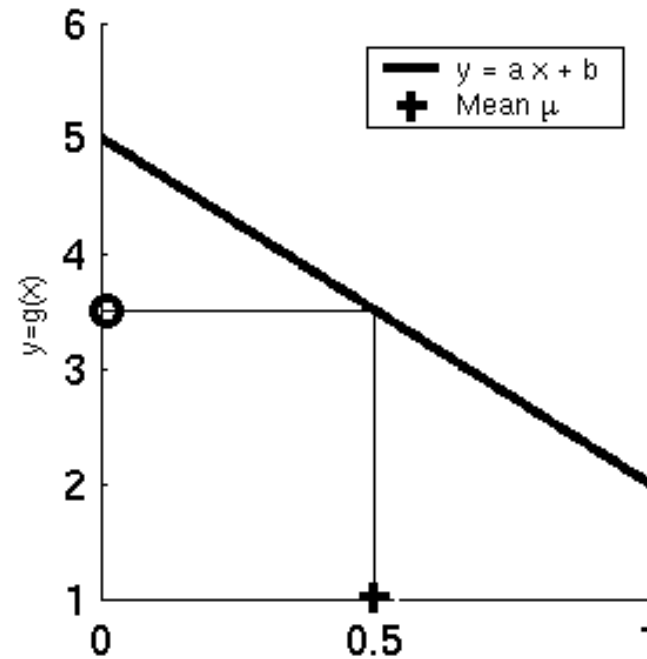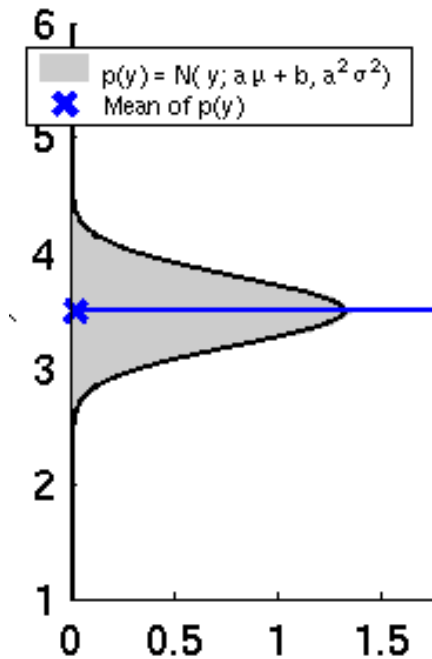




Non-Linear Function

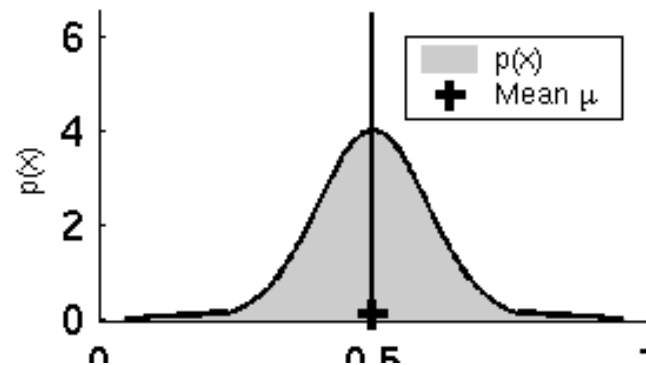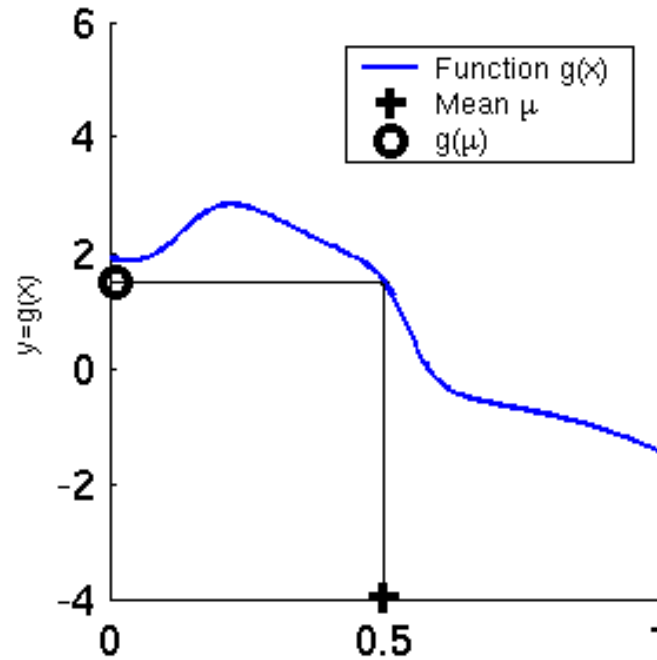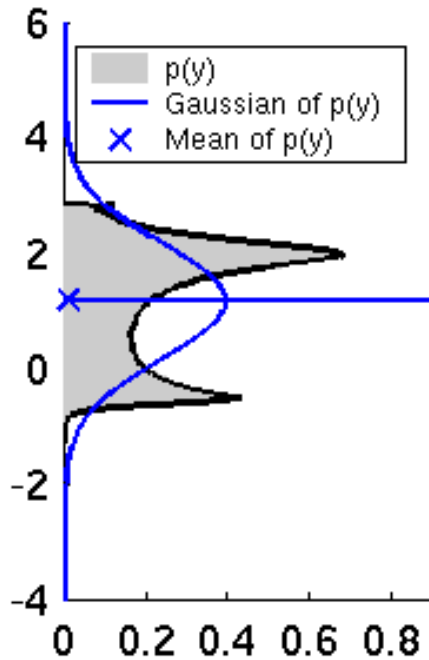




EKF Linearization (1)

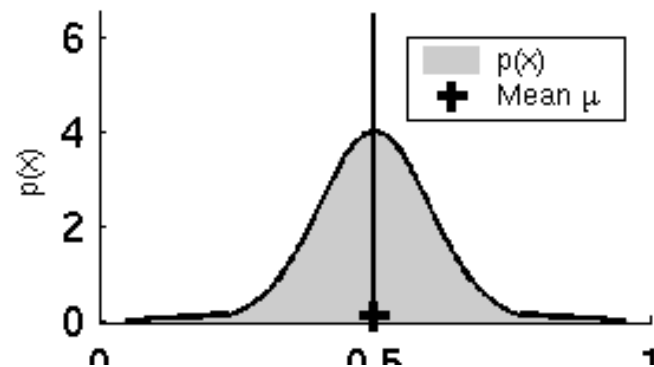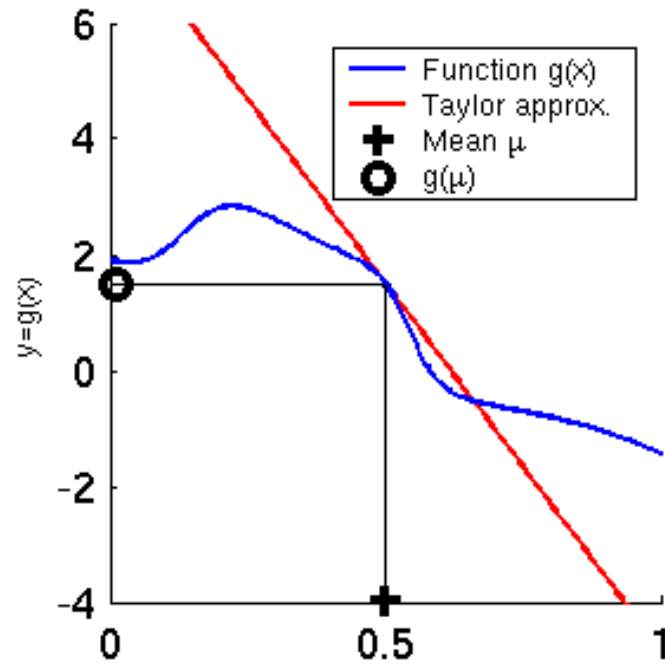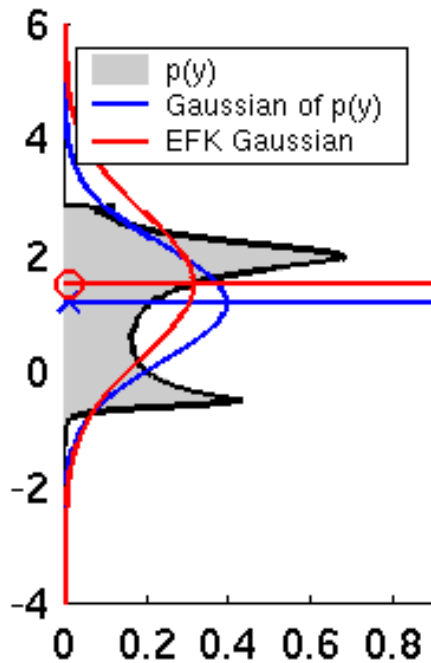

EKF Linearization (2)

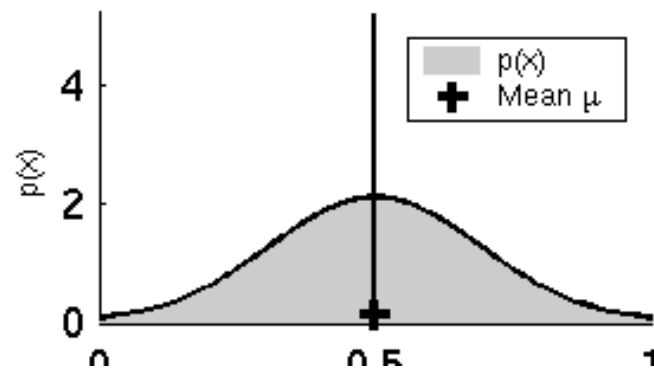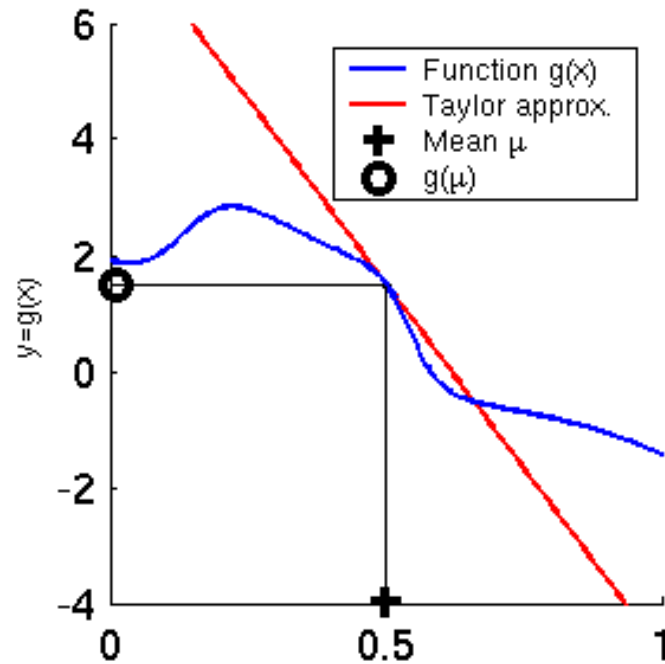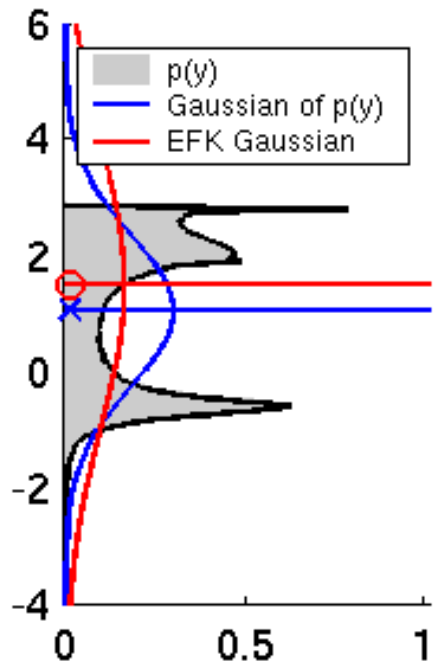

EKF Linearization (3)

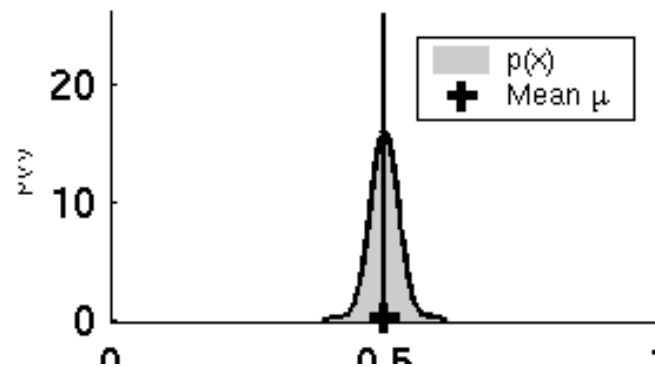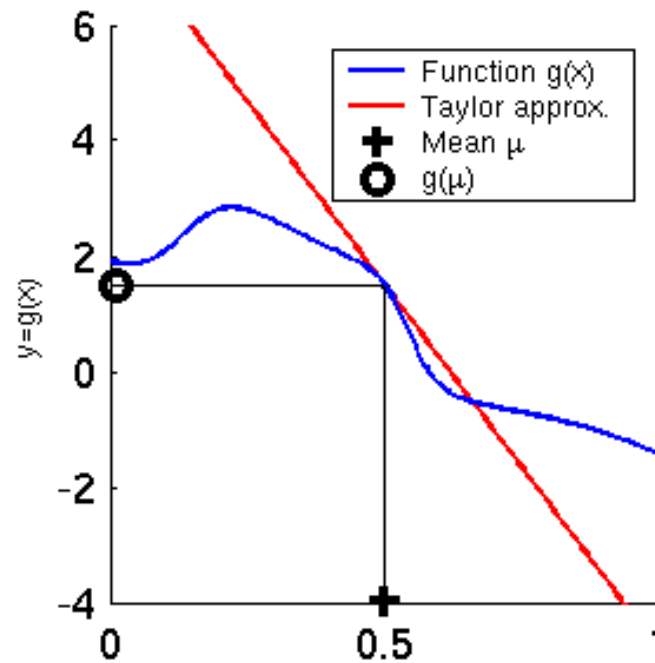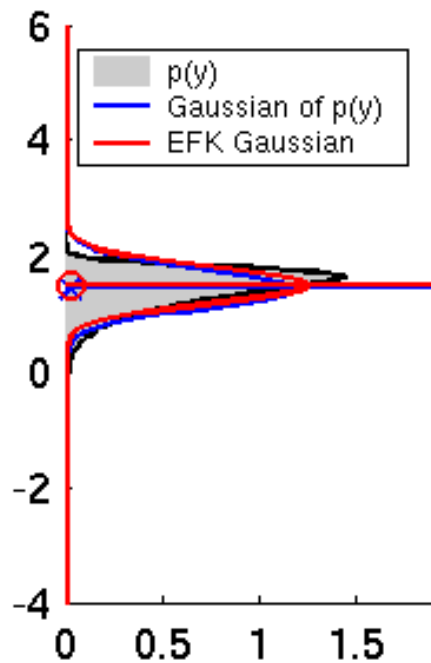

EKF Algorithm

1. **Extended_Kalman_filter**($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t$):

2. Prediction:

3. $\bar{\mu}_t = g(u_t, \mu_{t-1})$ \longleftarrow $\bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$

4. $\bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + Q_t$ \longleftarrow $\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + Q_t$

5. Correction:

6. $K_t = \bar{\Sigma}_t H_t^T (H_t \bar{\Sigma}_t H_t^T + R_t)^{-1}$ \longleftarrow $K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + R_t)^{-1}$

7. $\mu_t = \bar{\mu}_t + K_t (z_t - h(\bar{\mu}_t))$ \longleftarrow $\mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t)$


8. $\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$ \longleftarrow $\Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$

9. **Return** μ_t, Σ_t

$$H_t = \frac{\partial h(\bar{\mu}_t)}{\partial x_t} \quad G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}}$$

Example: EKF Localization

- EKF localization with landmarks (point features)

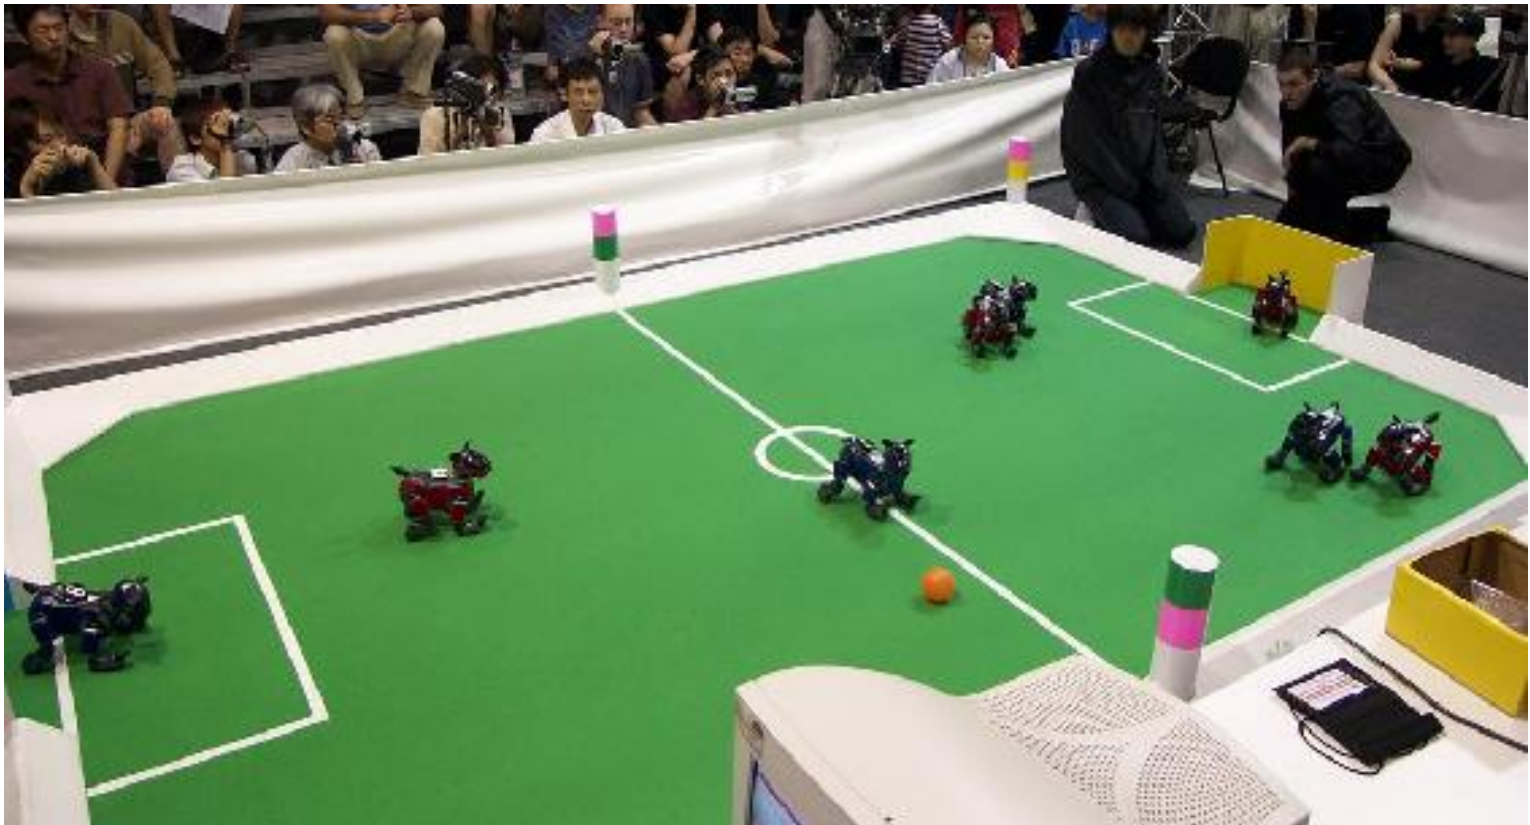

1. EKF_localization ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t, m$):

Prediction:

$$3. \quad G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial \mu_{t-1}} = \begin{pmatrix} \frac{\partial x'}{\partial \mu_{t-1,x}} & \frac{\partial x'}{\partial \mu_{t-1,y}} & \frac{\partial x'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial y'}{\partial \mu_{t-1,x}} & \frac{\partial y'}{\partial \mu_{t-1,y}} & \frac{\partial y'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial \theta'}{\partial \mu_{t-1,x}} & \frac{\partial \theta'}{\partial \mu_{t-1,y}} & \frac{\partial \theta'}{\partial \mu_{t-1,\theta}} \end{pmatrix}$$

Jacobian of g w.r.t location

$$5. \quad V_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial u_t} = \begin{pmatrix} \frac{\partial x'}{\partial v_t} & \frac{\partial x'}{\partial \omega_t} \\ \frac{\partial y'}{\partial v_t} & \frac{\partial y'}{\partial \omega_t} \\ \frac{\partial \theta'}{\partial v_t} & \frac{\partial \theta'}{\partial \omega_t} \end{pmatrix}$$

Jacobian of g w.r.t control

$$1. \quad Q_t = \begin{pmatrix} (\alpha_1 |v_t| + \alpha_2 |\omega_t|)^2 & 0 \\ 0 & (\alpha_3 |v_t| + \alpha_4 |\omega_t|)^2 \end{pmatrix}$$

Motion noise

$$2. \quad \bar{\mu}_t = g(u_t, \mu_{t-1})$$

Predicted mean

$$3. \quad \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t Q_t V_t^T$$

Predicted covariance (V maps Q into state space)

1. EKF_localization ($\mu_{t-1}, \Sigma_{t-1}, u_t, z_t, m$):

Correction:

3.
$$\hat{z}_t = \begin{pmatrix} \sqrt{(m_x - \bar{\mu}_{t,x})^2 + (m_y - \bar{\mu}_{t,y})^2} \\ \text{atan2}(m_y - \bar{\mu}_{t,y}, m_x - \bar{\mu}_{t,x}) - \bar{\mu}_{t,\theta} \end{pmatrix}$$
 Predicted measurement mean
(depends on observation type)

5.
$$H_t = \frac{\partial h(\bar{\mu}_t, m)}{\partial x_t} = \begin{pmatrix} \frac{\partial r_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \bar{\mu}_{t,x}}{\partial \bar{\mu}_{t,x}} & \frac{\partial \bar{\mu}_{t,y}}{\partial \bar{\mu}_{t,y}} & \frac{\partial \bar{\mu}_{t,\theta}}{\partial \bar{\mu}_{t,\theta}} \end{pmatrix}$$
 Jacobian of h w.r.t location

6.
$$R_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_r^2 \end{pmatrix}$$





7.
$$S_t = H_t \bar{\Sigma}_t H_t^T + R_t$$
 Innovation covariance

8.
$$K_t = \bar{\Sigma}_t H_t^T S_t^{-1}$$
 Kalman gain





9.
$$\mu_t = \bar{\mu}_t + K_t (z_t - \hat{z}_t)$$
 Updated mean

10.
$$\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$$
 Updated covariance





EKF Prediction Step Examples

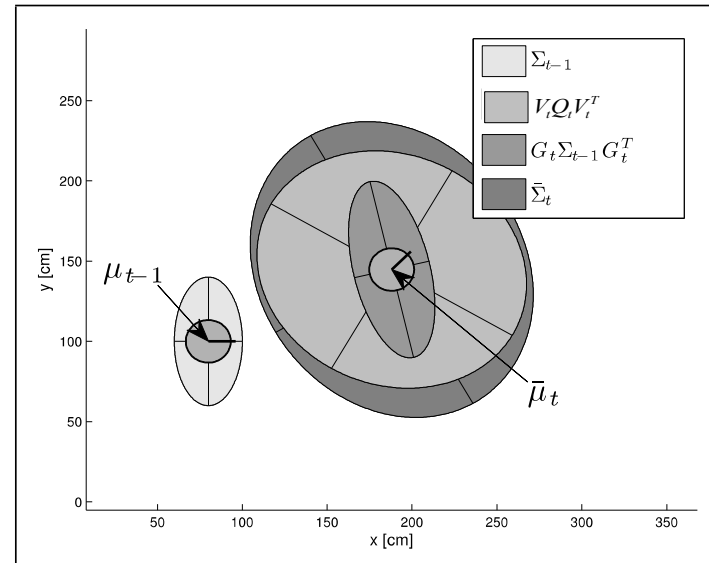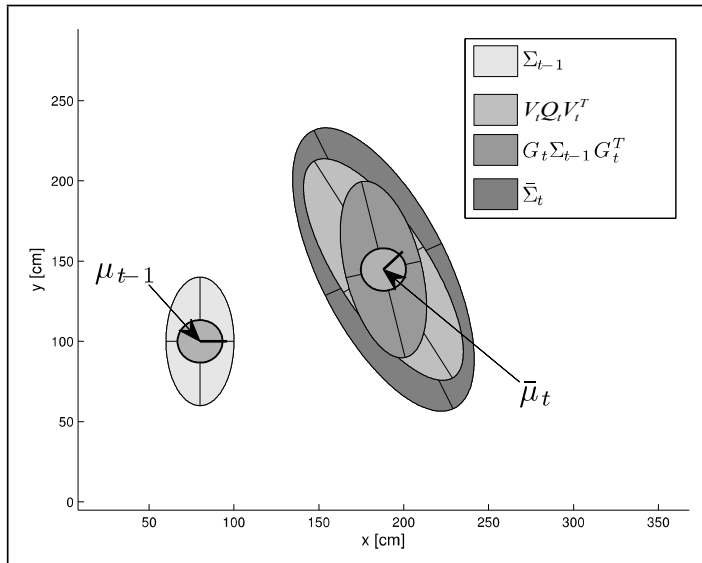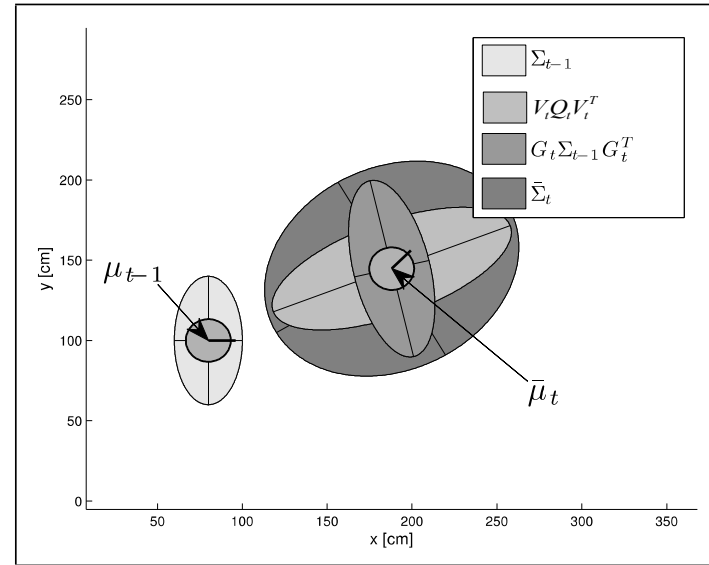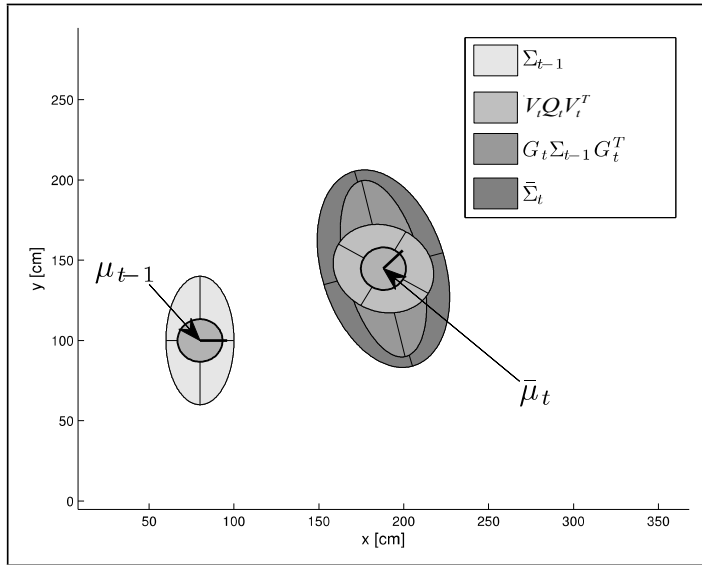



EKF Observation Prediction Step

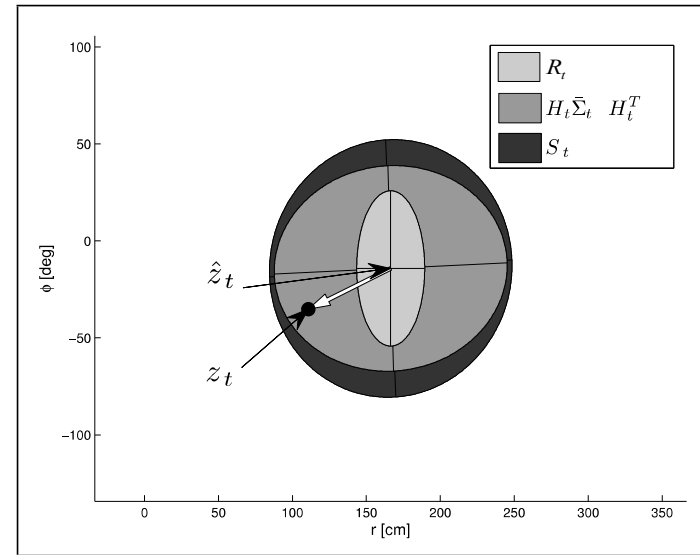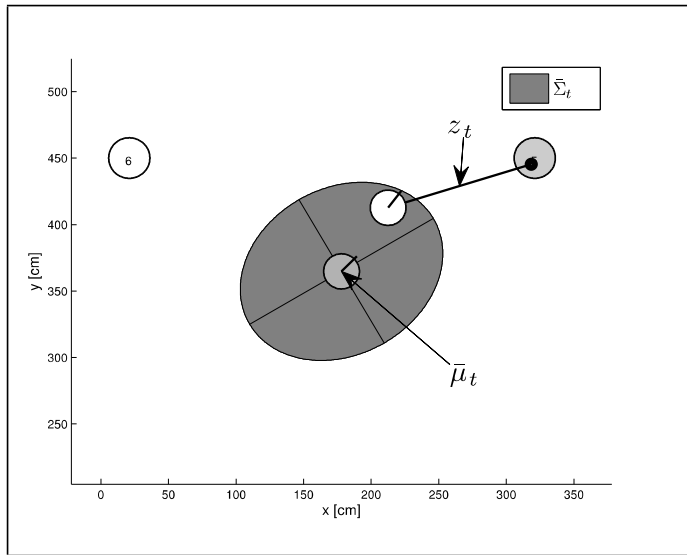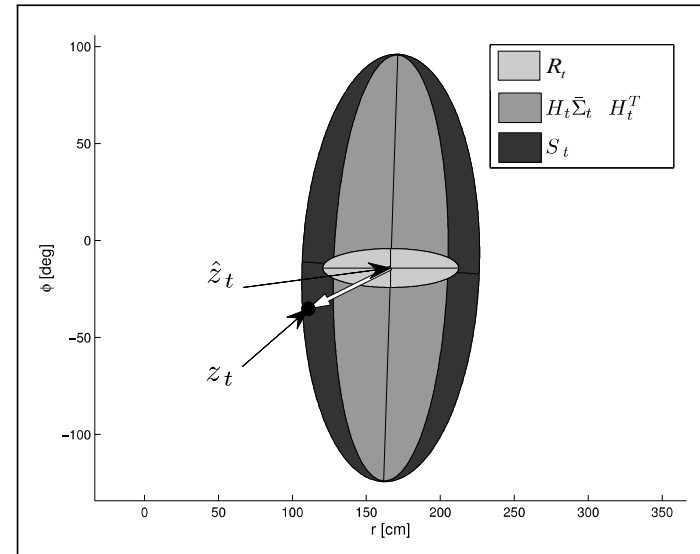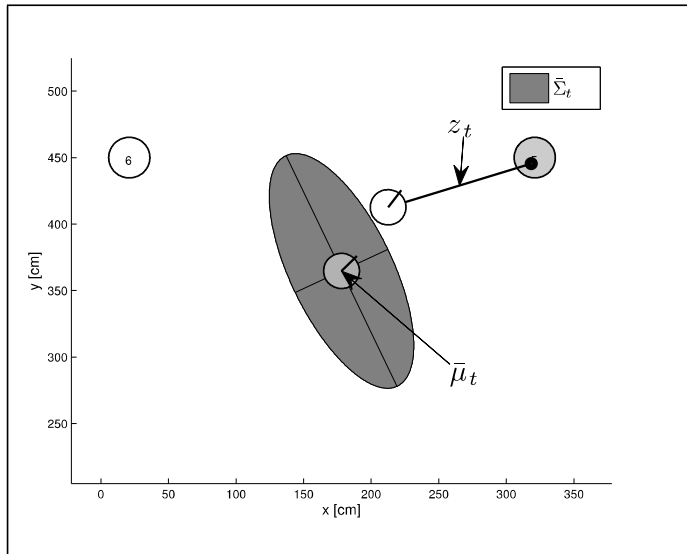



EKF Correction Step

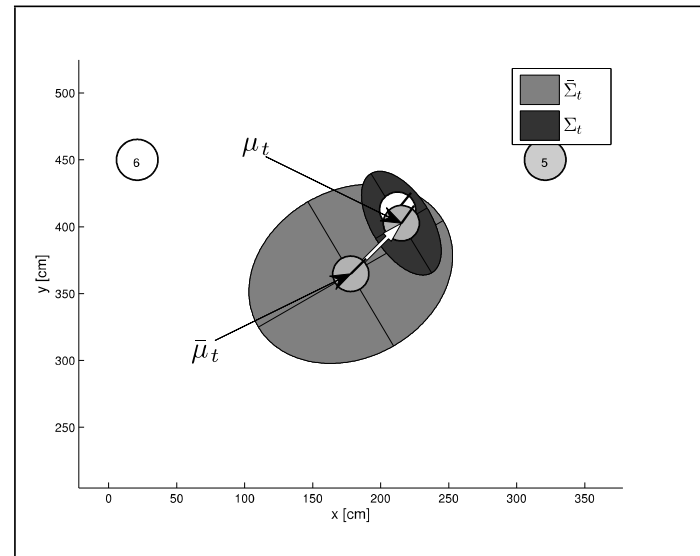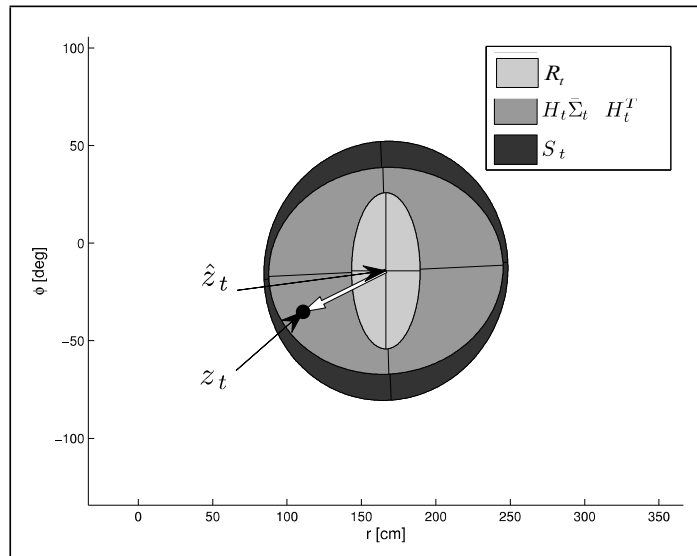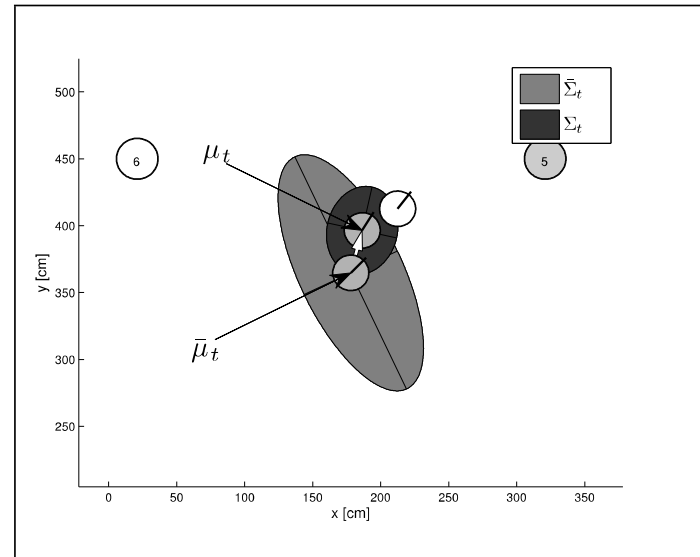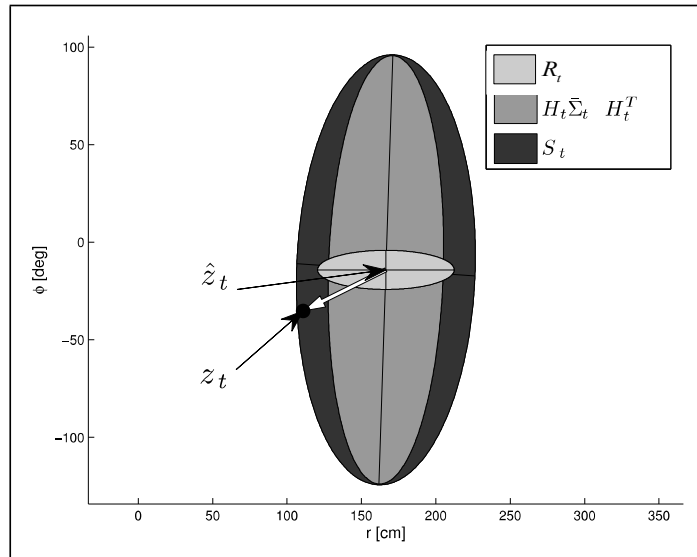

Estimation Sequence (1)

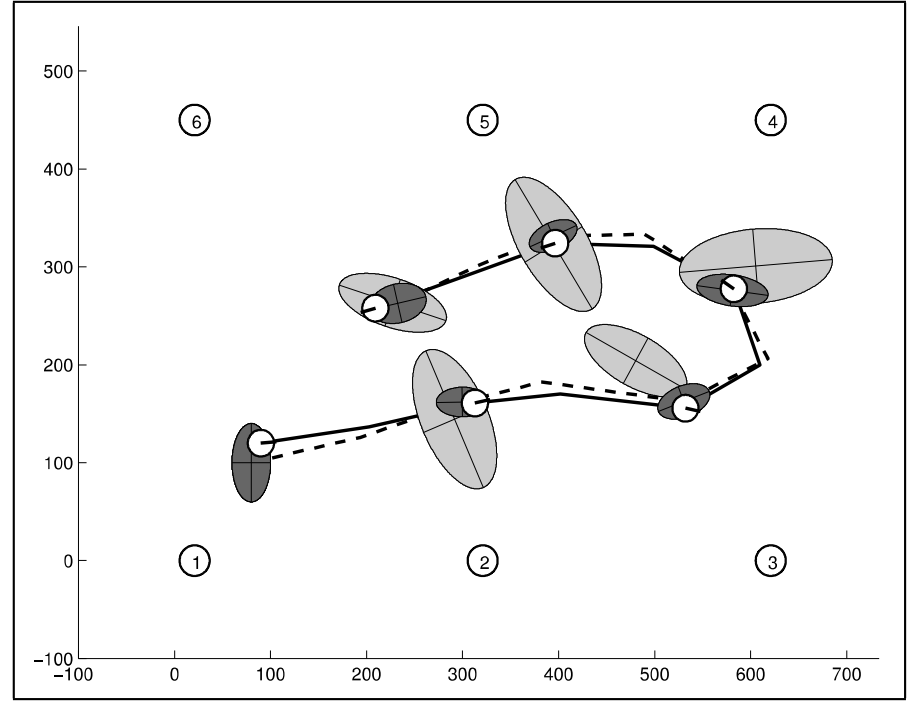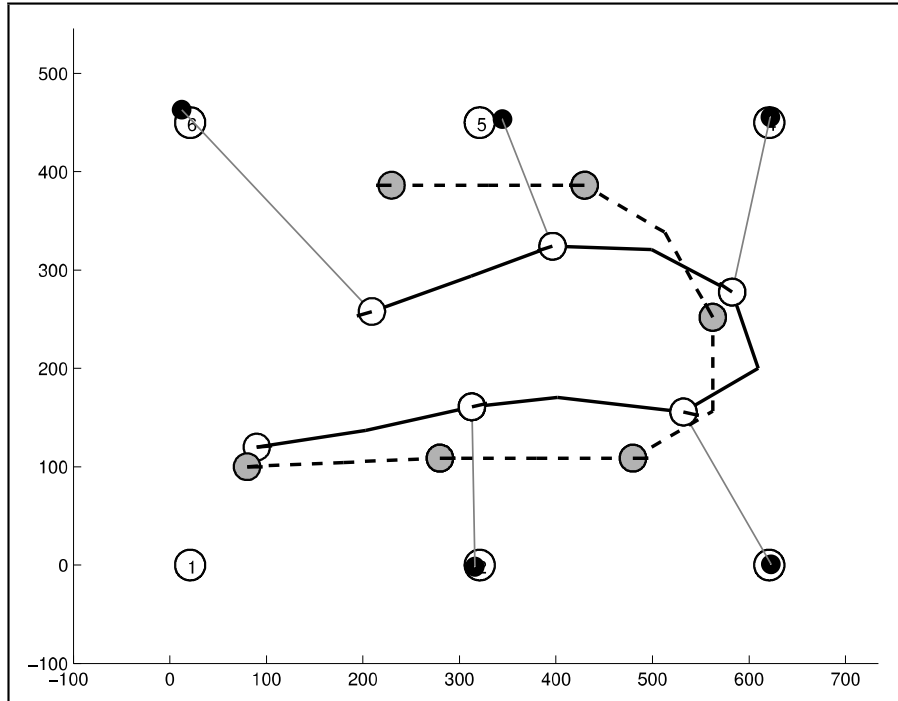

Estimation Sequence (2)

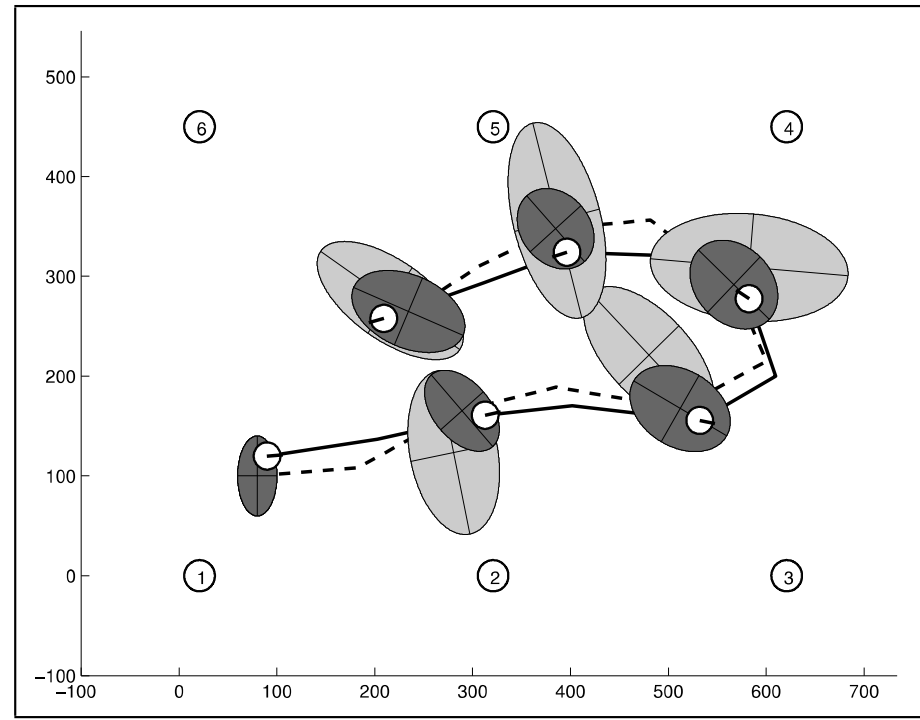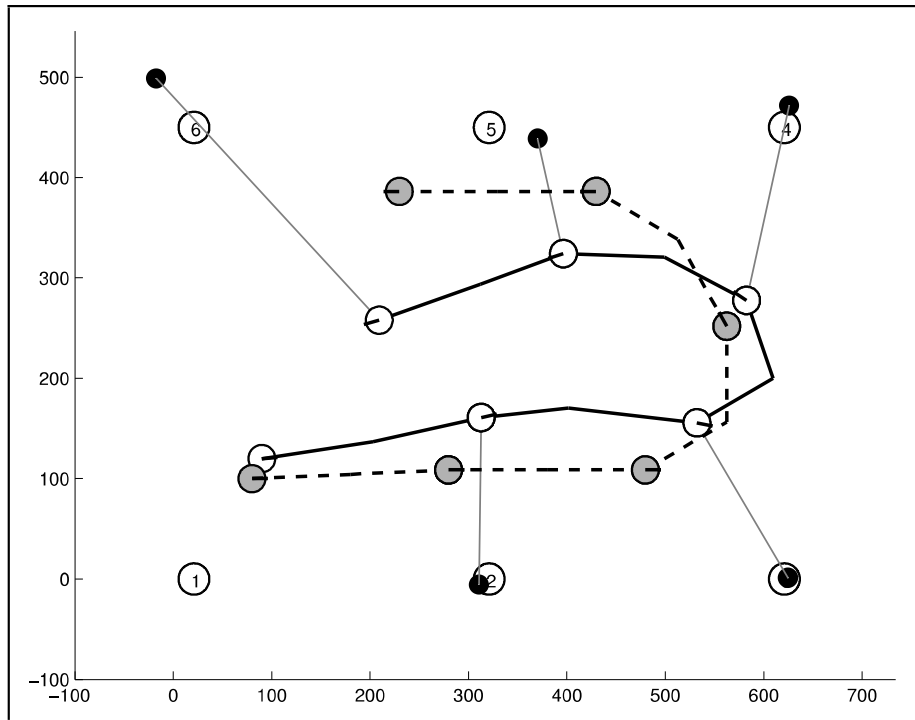

Extended Kalman Filter Summary

- Ad-hoc solution to deal with non-linearities
- Performs local linearization in each step
- Works well in practice for moderate non-linearities
- Example: landmark localization
- There exist better ways for dealing with non-linearities such as the unscented Kalman filter called UKF